
SWITCH PANEL REMOVAL/INSTALLATION


id091700601600

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Open the glove compartment.
3. Remove the center panel. (See CENTER PANEL REMOVAL/INSTALLATION.)
4. Remove the screw.

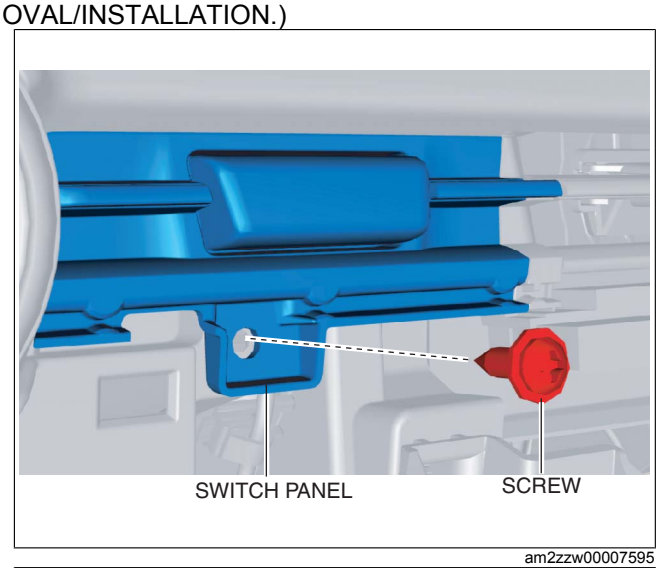

am2zzw00007595

5. Move the remover tool in the order of arrows (1) and (2) shown in the figure and detach the clips from the dashboard.
6. Disconnect the hazard warning switch connector and remove the switch panel.
7. When replacing the switch panel, remove the hazard warning switch. (See HAZARD WARNING SWITCH REMOVAL/INSTALLATION.)
8. Install in the reverse order of removal.

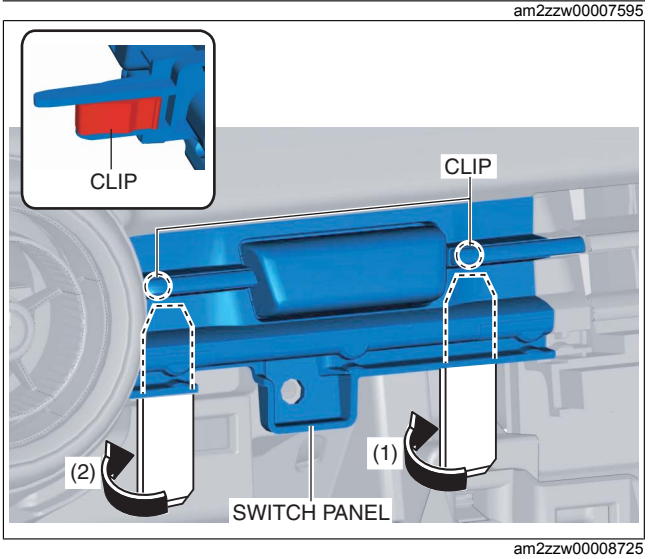

am2zzw00008725