
REAR PACKAGE TRIM REMOVAL/INSTALLATION


id091700603400

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)
2. Remove the following parts:
   (1) Rear scuff plate (See REAR SCUFF PLATE REMOVAL/INSTALLATION.)
   (2) Rear seat cushion (See REAR SEAT CUSHION REMOVAL/INSTALLATION.)
   (3) Tire house trim (See TIRE HOUSE TRIM REMOVAL/INSTALLATION.)
   (4) C-pillar trim (See C-PILLAR TRIM REMOVAL/INSTALLATION.)
   (5) High-mount brake light (See HIGH-MOUNT BRAKE LIGHT REMOVAL/INSTALLATION.)
3. Remove the fasteners.

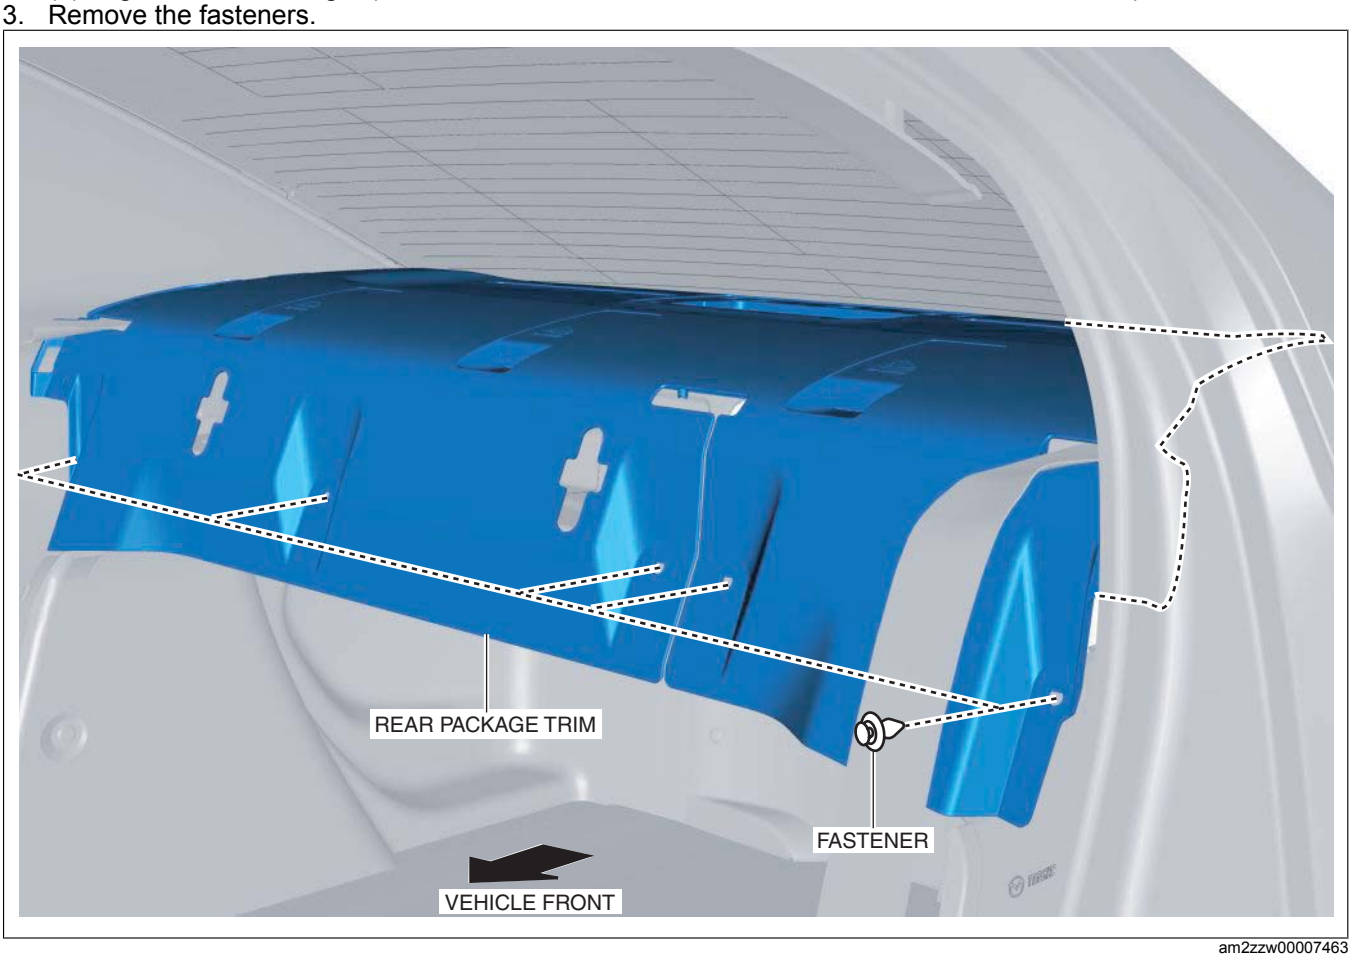


am2zzw00007463

4. Remove the clips.

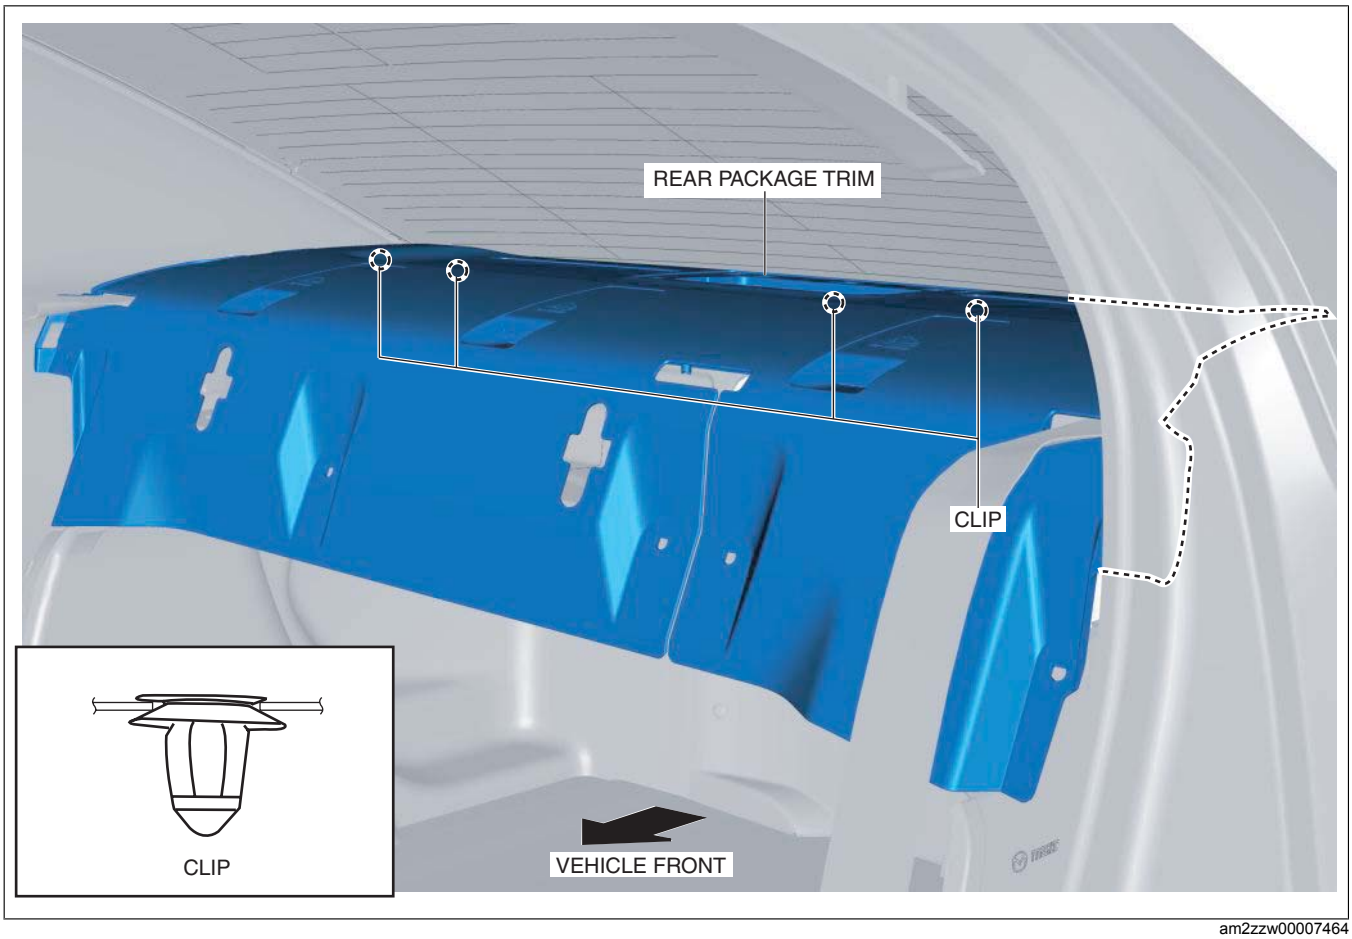

am2zzw00007464

5. Pull up the rear package trim in the direction of the arrow (1) shown in the figure while remove the hooks, pull the rear package trim in the direction of the arrow (2), and remove it.

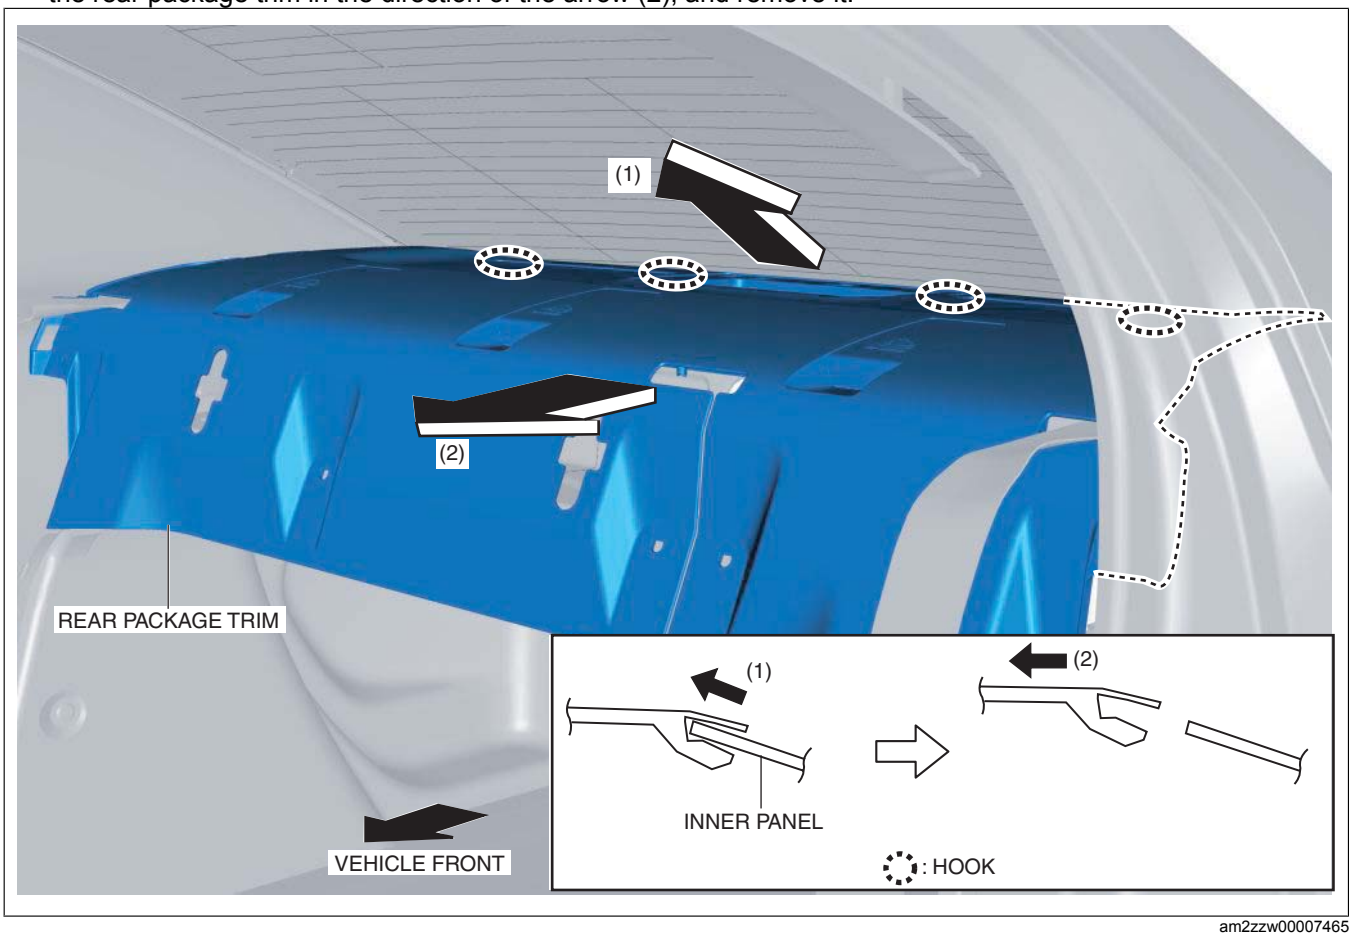

am2zzw00007465

6. Install in the reverse order of removal.