
TRUNK LID TRIM REMOVAL/INSTALLATION

id091700604200

1. Remove the fasteners, then remove the trunk lid trim.

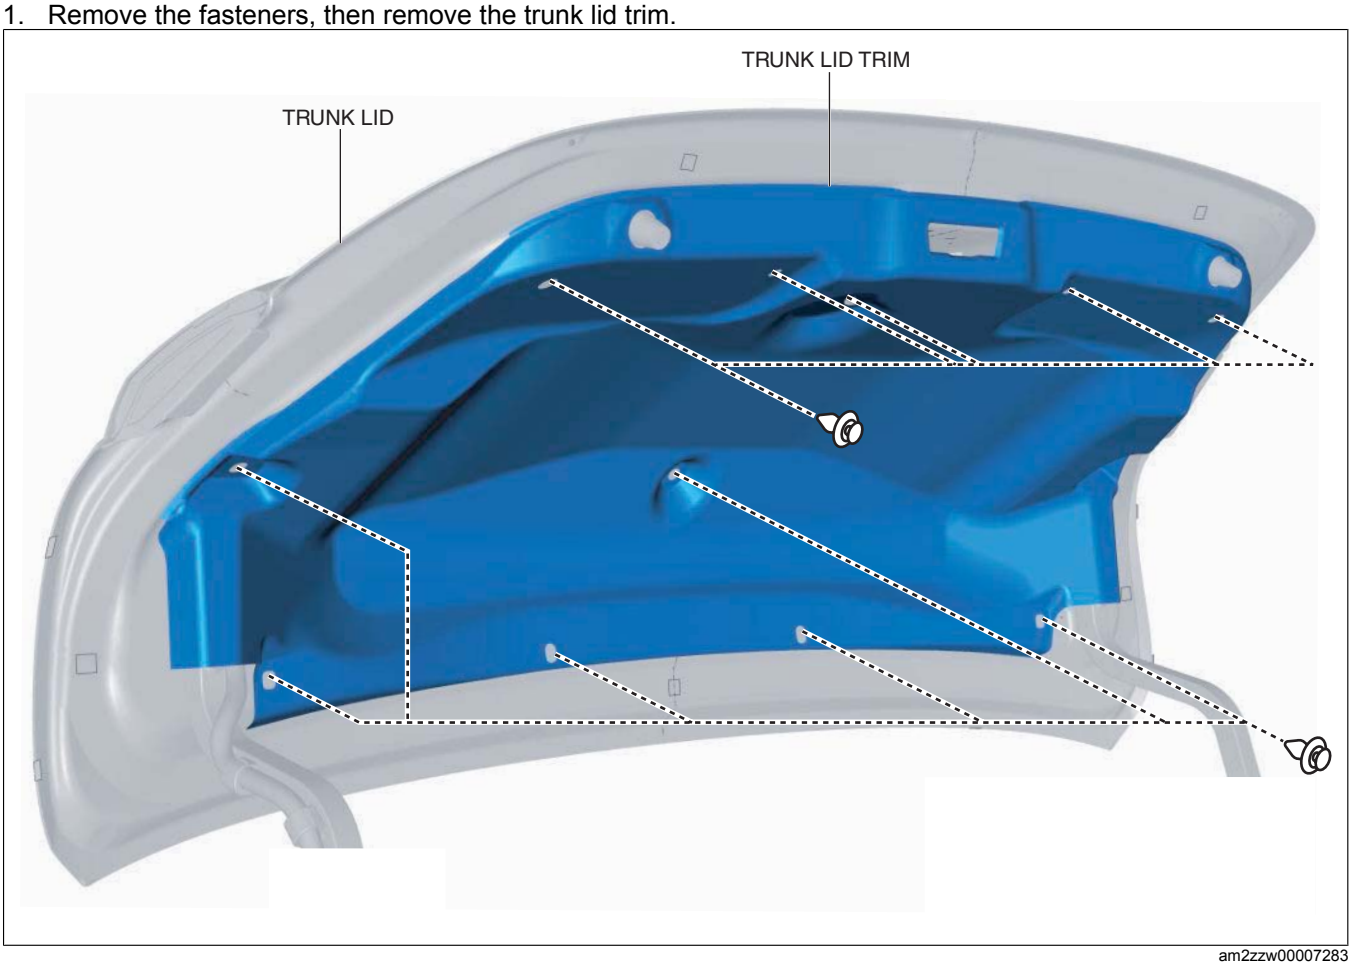

am2zzw00007283

2. Install in the reverse order of removal.