CARGO COMPARTMENT LIGHT REMOVAL/INSTALLATION


id091800801700

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)

Caution


- **When inserting the remover tool in the gap between the cargo compartment light and the trunk side trim, the remover tool could interfere with the trunk side trim and scratch or damage it. When removing the cargo compartment light from the trunk side trim, apply protective tape to the trunk side trim.**

2. To prevent scratches or damage, apply protective tape to the position shown in the figure.

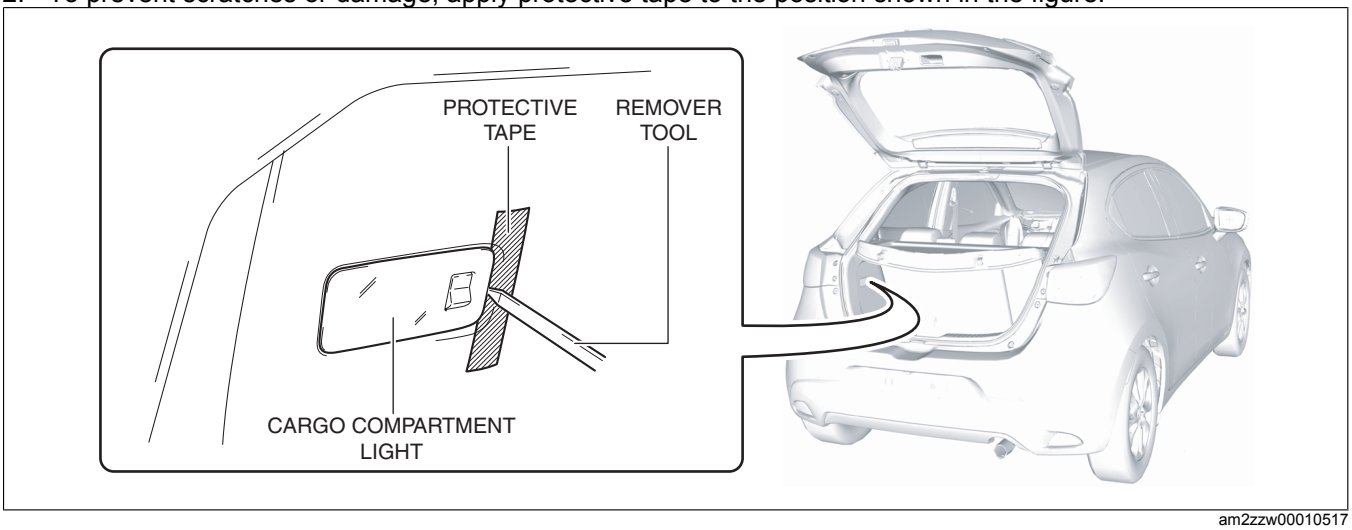


am2zzw00010517

3. Insert the remover tool into the gap between the cargo compartment light and the trunk side trim.
4. Move the remover tool in the direction of arrow (1) shown in the figure and pull out the tab of the cargo compartment light from the trunk side trim.

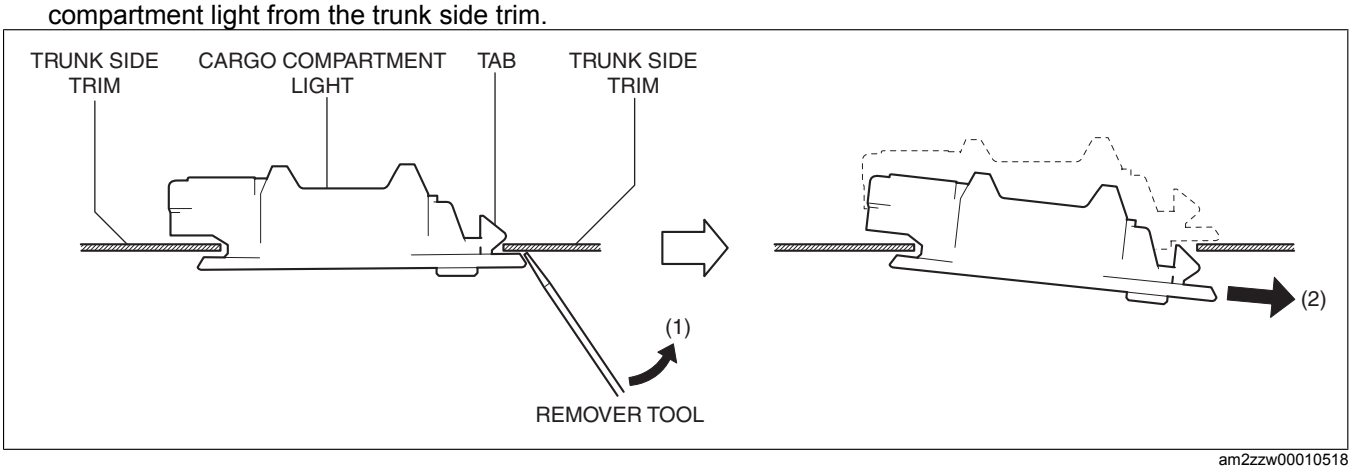

am2zzw00010518

5. Move the cargo compartment light in the direction of arrow (2) shown in the figure and pull out the cargo compartment light from the trunk side trim.
6. Disconnect the connector.
7. Remove the cargo compartment light.
8. Install in the reverse order of removal.

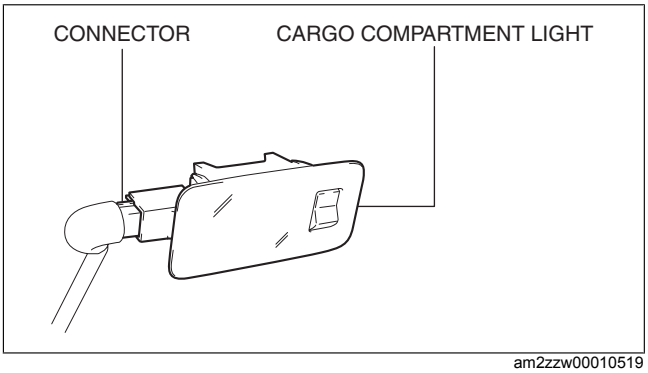

am2zzw00010519