
HIGH-MOUNT BRAKE LIGHT REMOVAL/INSTALLATION

id091800802000


4SD

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Insert the remover tool in the gap between the high-mount brake light cover and the rear package trim.

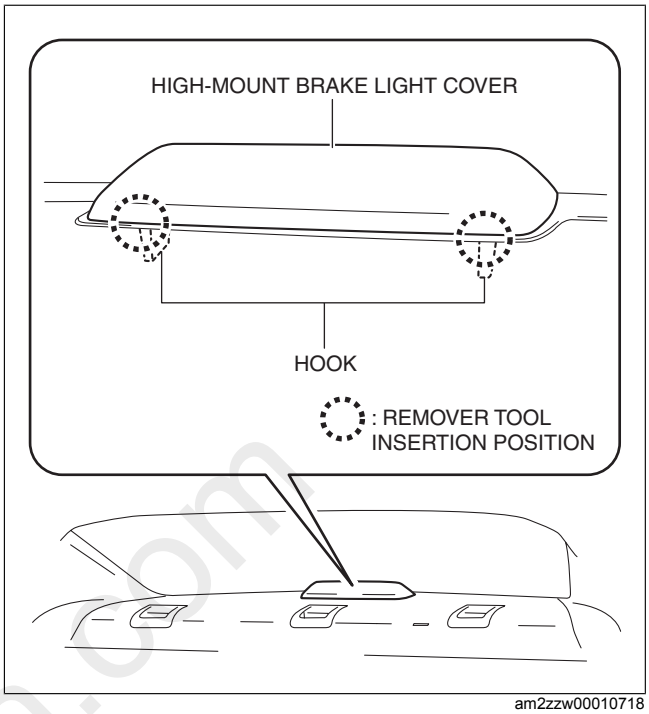


am2zzw00010718

3. While pressing the hook in the direction of arrow (1) shown in the figure, lift up the high-mount brake light cover in the direction of arrow (2) shown in the figure and pull out the hook from the rear package trim.

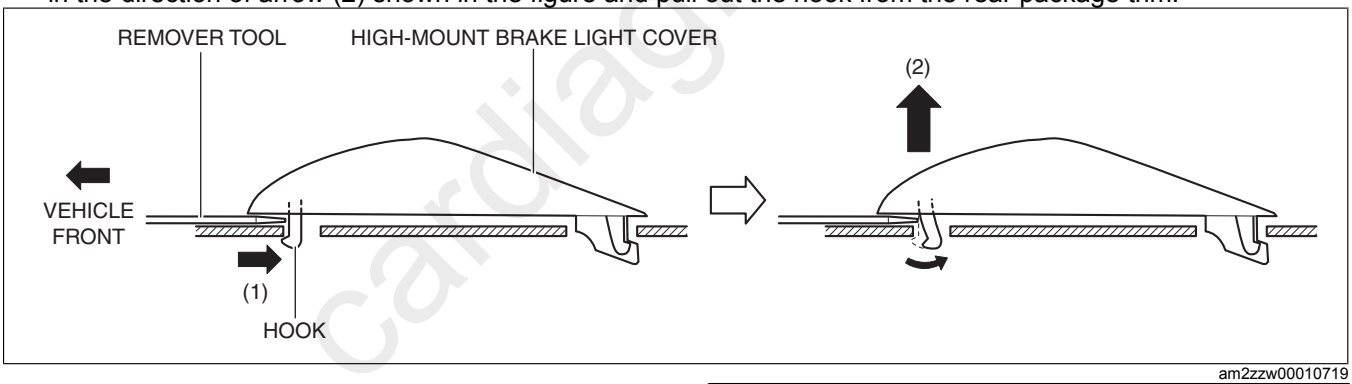

am2zzw00010719


4. Move the high-mount brake light cover in the direction of arrow shown in the figure and pull out the guide from the rear package trim.

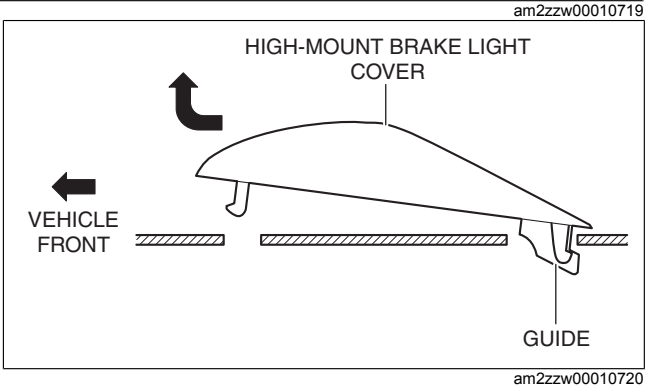

am2zzw00010720


cardiagn.com

5. Disconnect the connector.

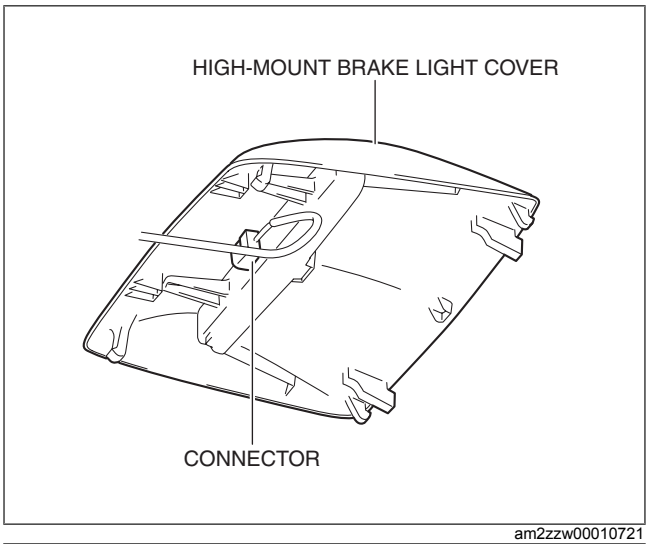

am2zzw00010721

6. Move the high-mount brake light in the direction of arrows shown in the figure and disconnect the tabs of the high-mount brake light cover from the high-mount brake light.
7. Remove the high-mount brake light.
8. Install in the reverse order of removal.

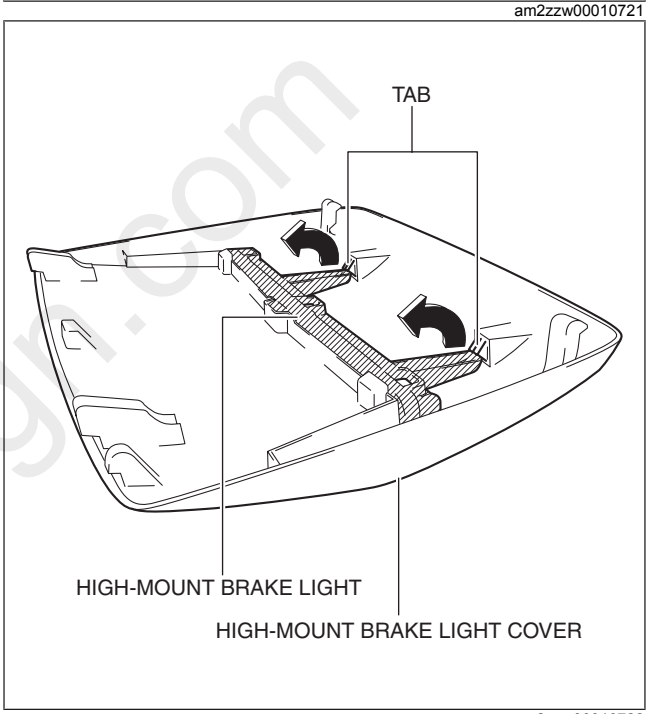


am2zzw00010722

cardiagn.com


5HB
Removal
1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Remove the liftgate upper trim. (See LIFTGATE UPPER TRIM REMOVAL/INSTALLATION.)

3. Remove the bolt. (with DAB antenna amplifier)
4. Remove the fastener. (with DAB antenna amplifier)
5. Set the DAB antenna amplifier aside in the direction of the arrow shown in the figure. (with DAB antenna amplifier)

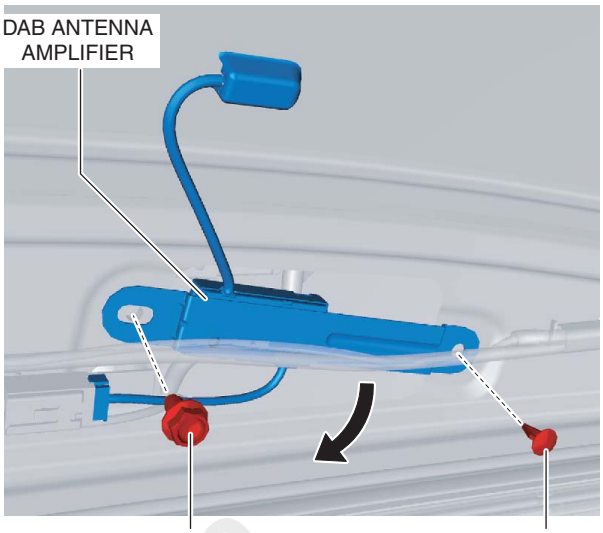


am2zzw00010723

6. Disconnect the connector.

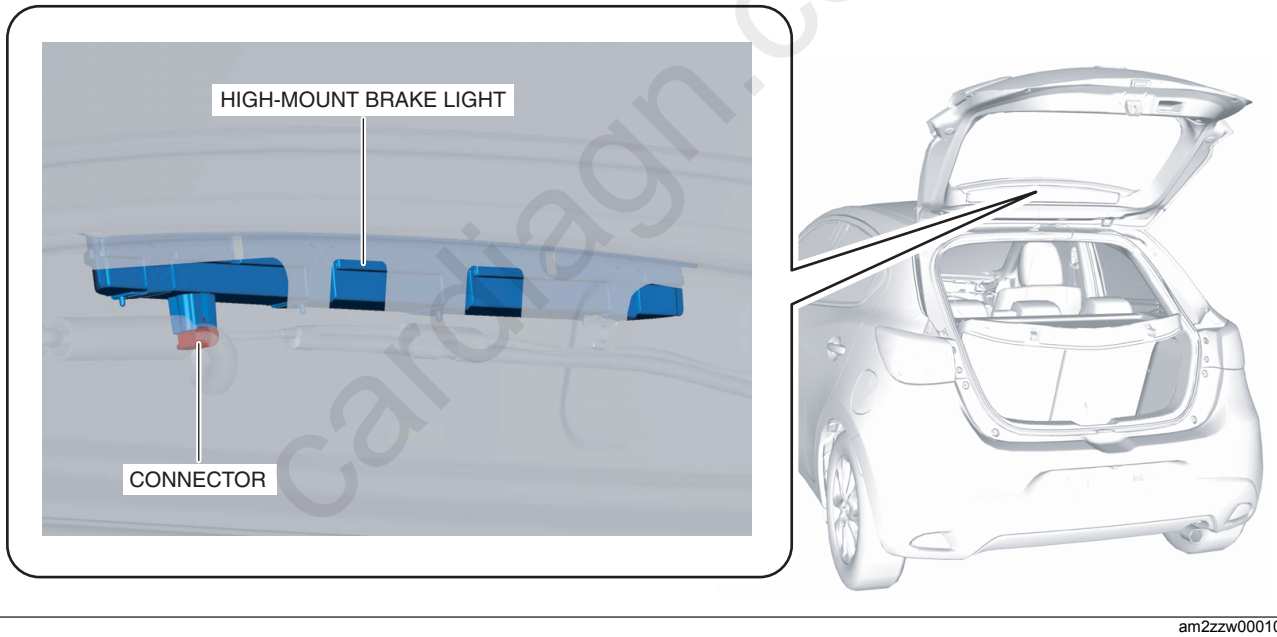

am2zzw00010724

7. Insert a tape-wrapped flathead screwdriver into the gap between the clip and the high-mount brake light.

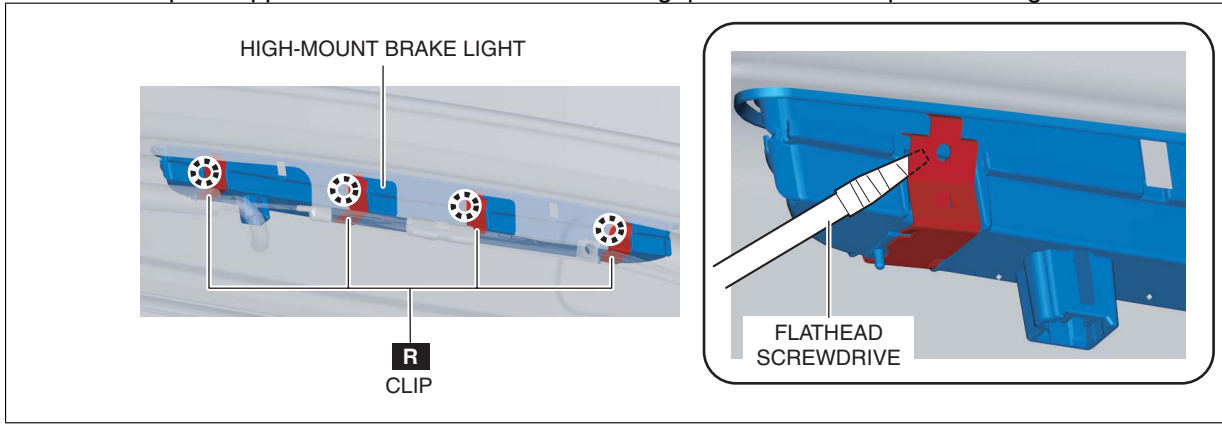


am2zzw00010725

cardiagn.com

Caution


- **Carefully remove the clip because the housing may be damaged if an excessive force is applied while removing the clip from the high-mount brake light. If the housing is damaged, replace the high-mount brake light.**

8. While pressing part A of the clip using the flathead screwdriver, pull the clip in the direction of arrow (2) and remove the clip from the high-mount brake light.

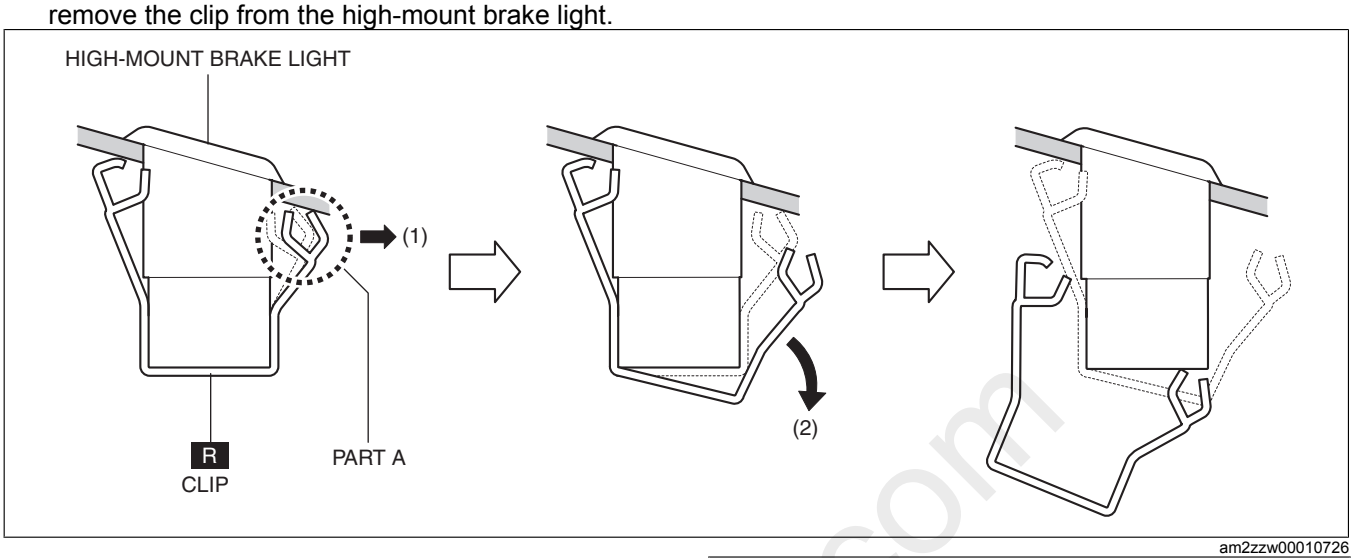

am2zzw00010726

9. Remove all clips from the high-mount brake light and remove the high-mount brake light from the liftgate.

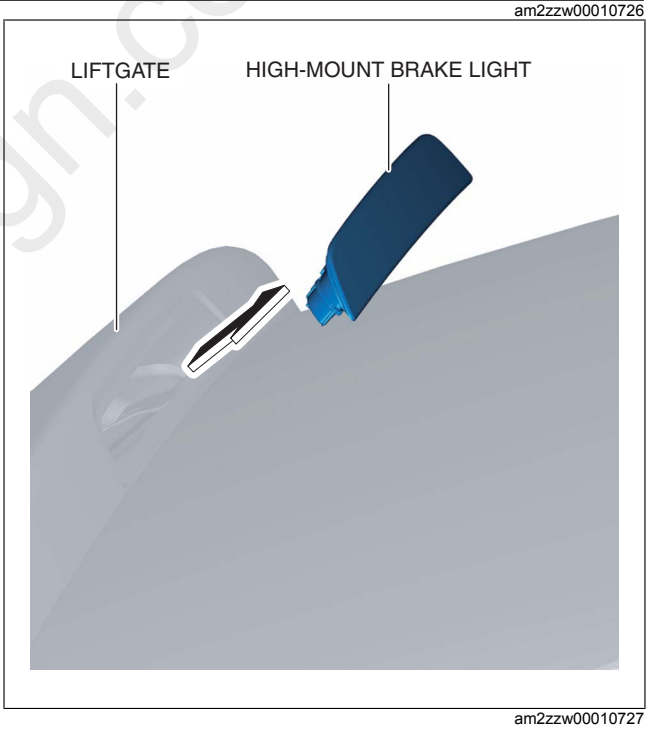


am2zzw00010727

cardiagn.com


Installation

1. Install the clips to the high-mount brake light.

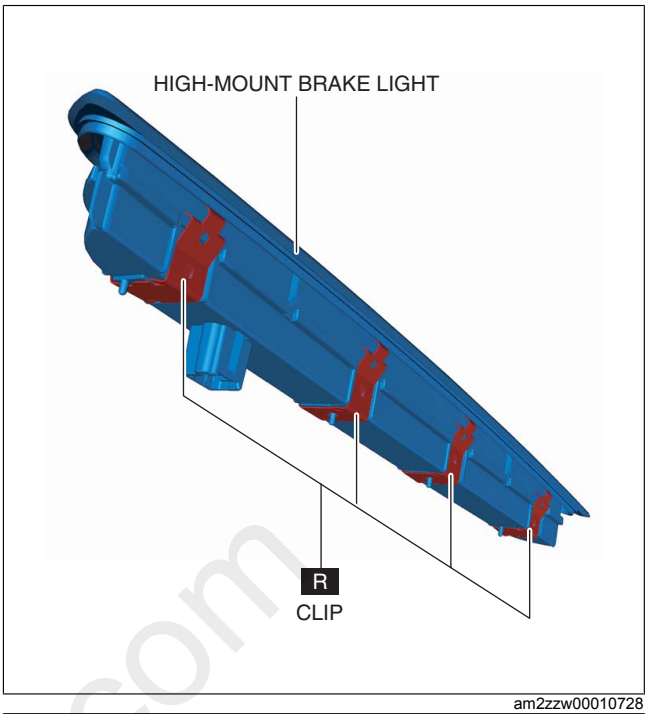

am2zzw00010728


2. Install the high-mount brake light to the liftgate.

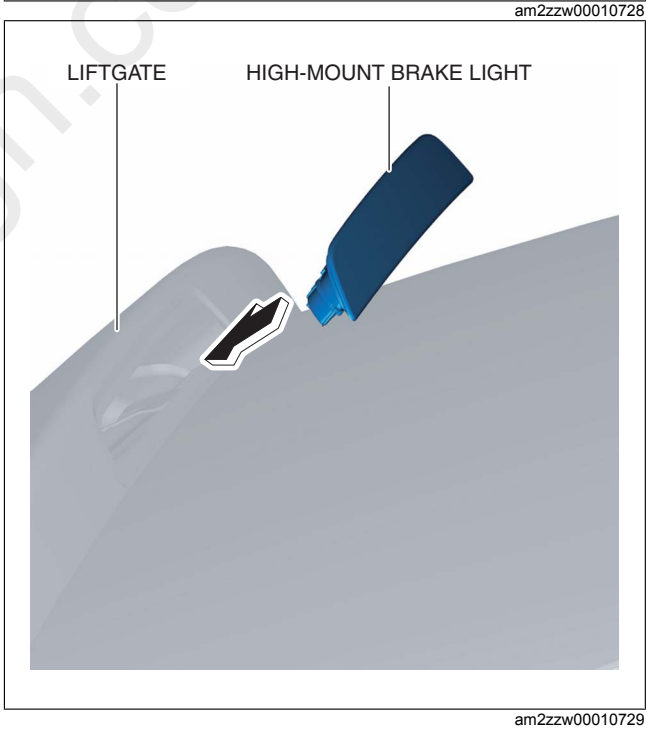

am2zzw00010729


3. Connect the connector.

cardiagn.com

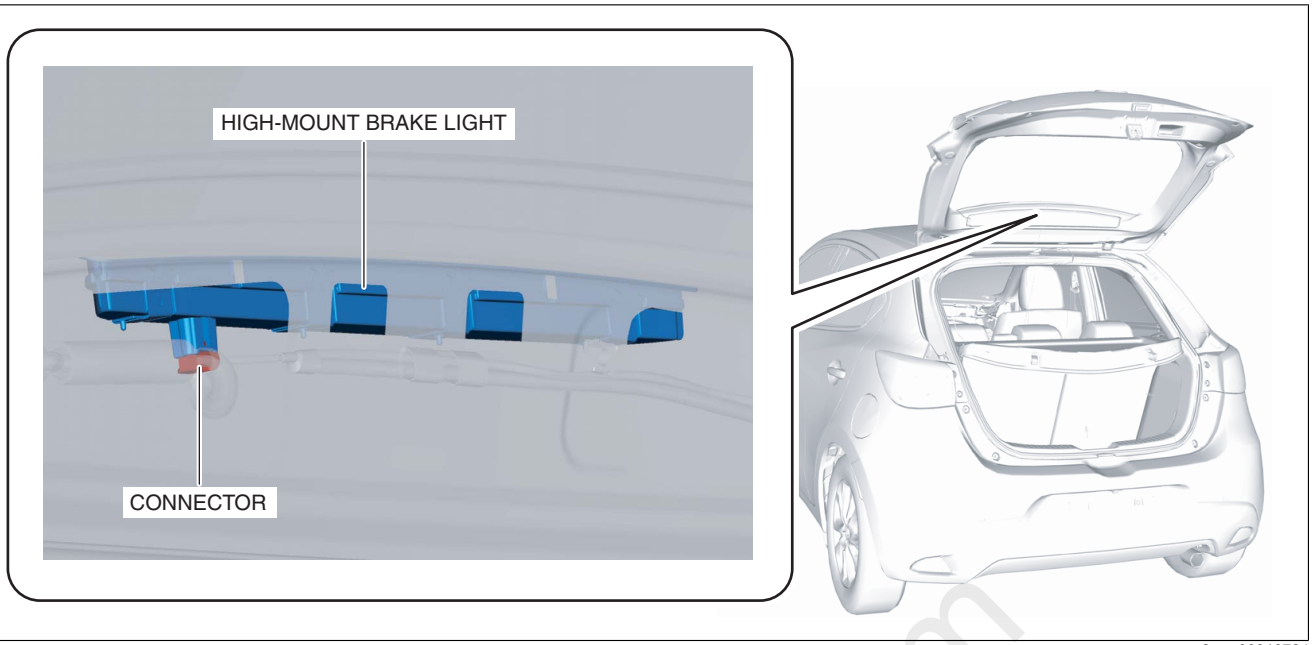

am2zzw00010724

4. Install the fastener (with DAB antenna amplifier).
5. Install the bolt (with DAB antenna amplifier).
6. Install the liftgate upper trim. (See LIFTGATE UPPER TRIM REMOVAL/INSTALLATION.)
7. Connect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)

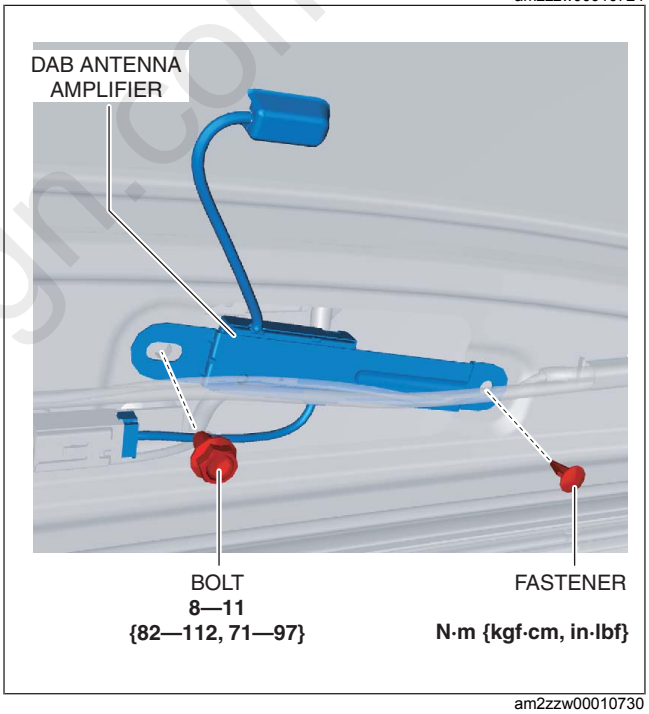

am2zzw00010730

cardiagn.com