
REAR FOG LIGHT SHORT CORD REMOVAL/INSTALLATION


id091800901000

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION)
2. Disconnect the connector.

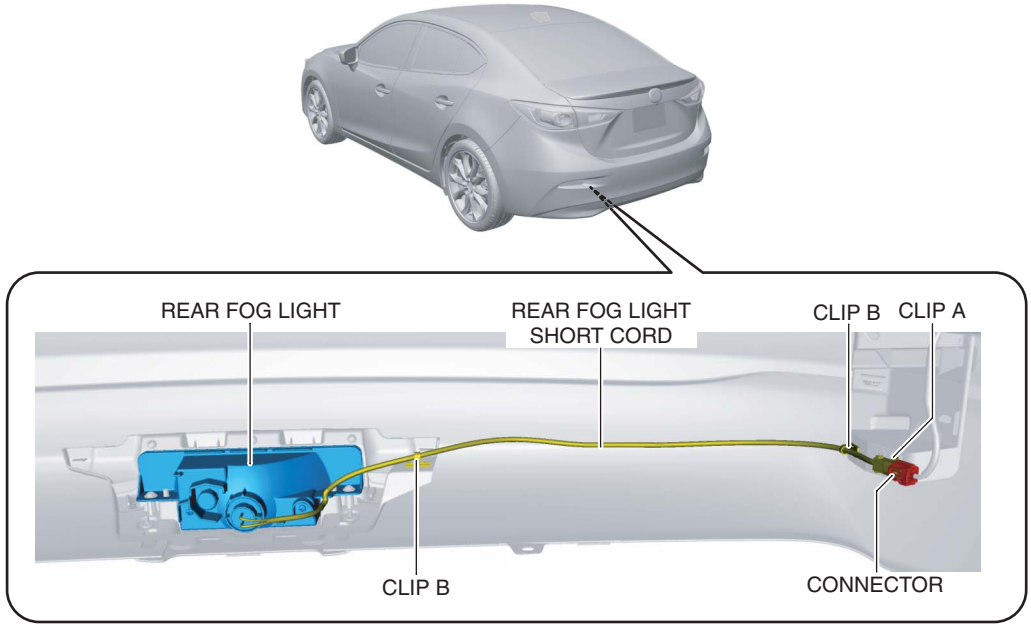


am2zzw00010687

3. While pressing clip A tabs in the direction of arrows (1) shown in the figure using the remover tool, pull clip A in the direction of arrow (2) shown in the figure to remove clip A from the rear bumper.

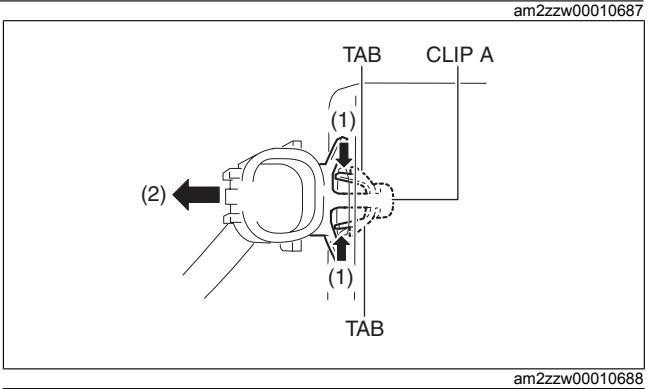


am2zzw00010688

4. Remove the rear fog light short cord from clips B.

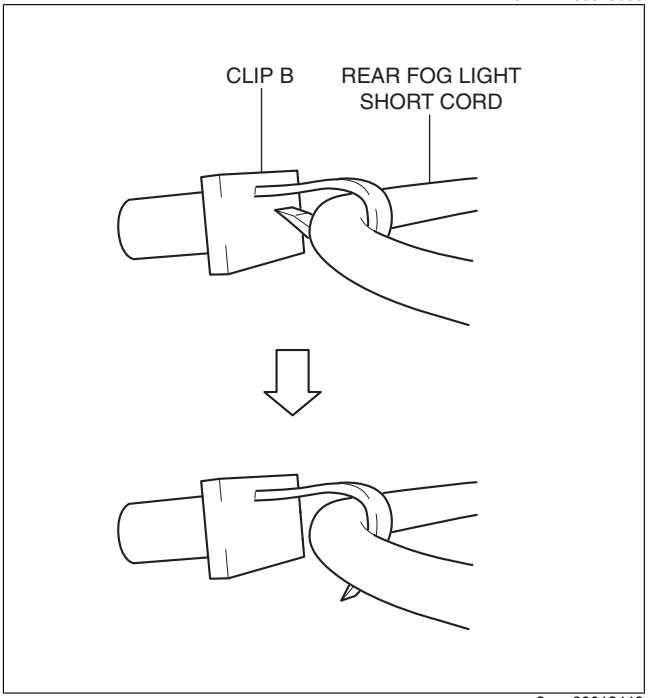

am2zzw00012448

5. Turn the socket counterclockwise and remove it in the direction of arrow (1) shown in the figure.
6. Remove the rear fog light short cord.
7. Install in the reverse order of removal.

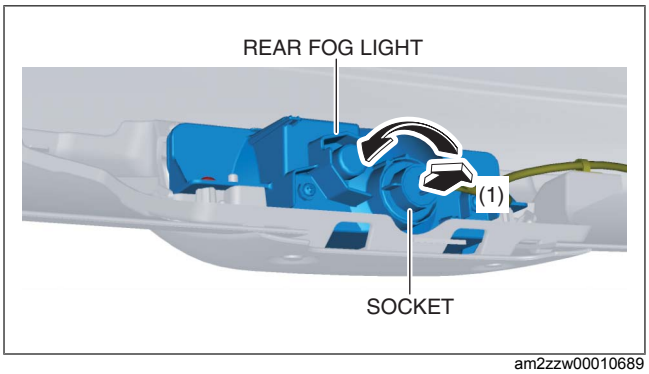

am2zzw00010689