
DAB ANTENNA AMPLIFIER REMOVAL/INSTALLATION


id092000815800

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION.)
2. Remove the liftgate upper trim. (See LIFTGATE UPPER TRIM REMOVAL/INSTALLATION.)
3. Disconnect the connector.

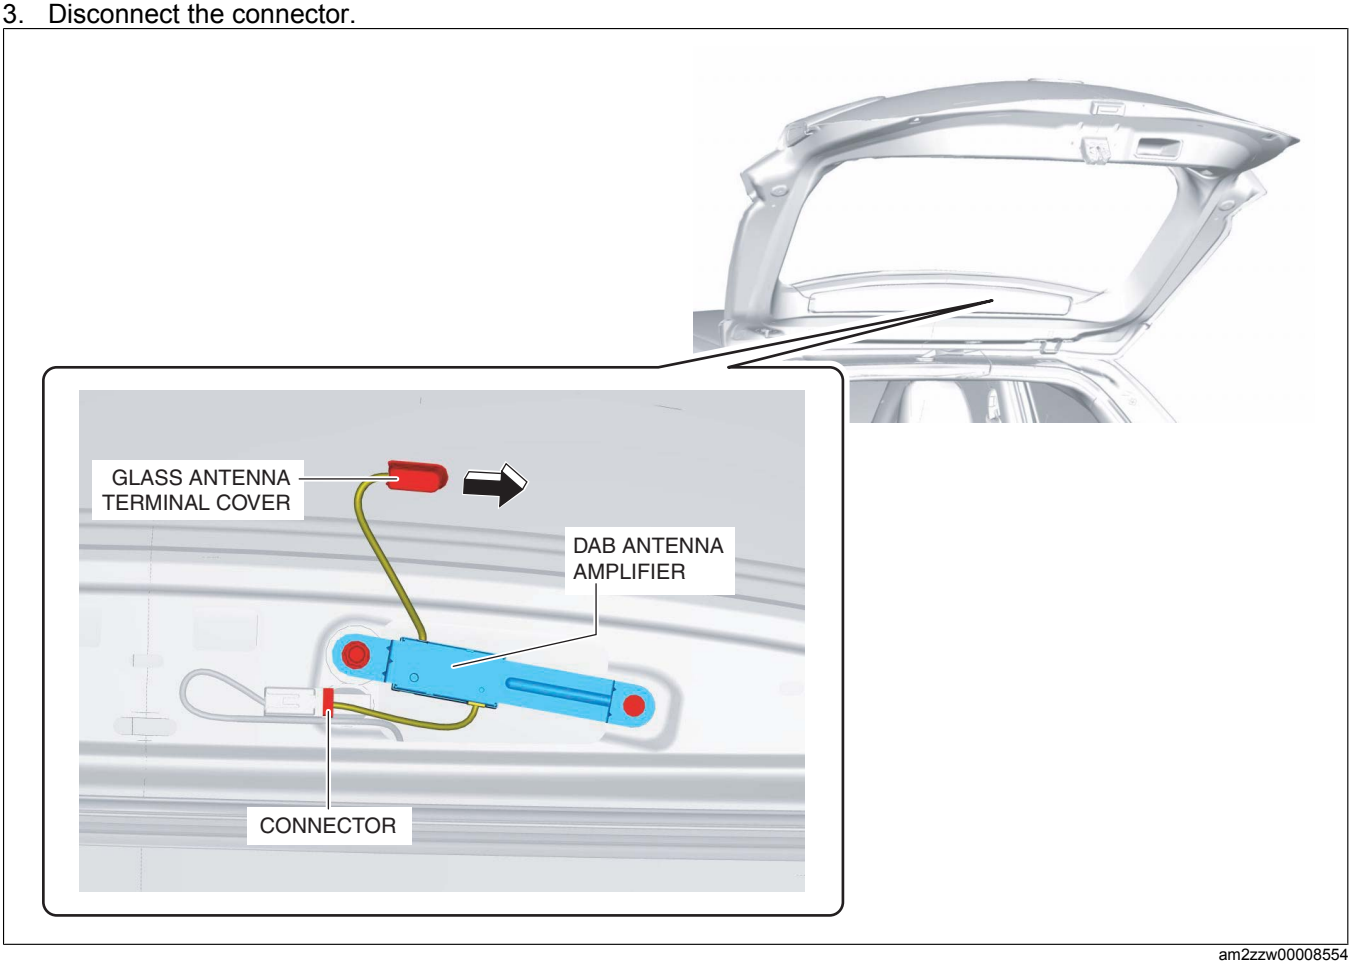

am2zzw00008554

4. Remove the glass antenna terminal cover in the direction of the arrow shown in the figure.
5. Remove the fastener.
6. Remove the bolt.
7. Remove the DAB antenna amplifier.
8. Install in the reverse order of removal.

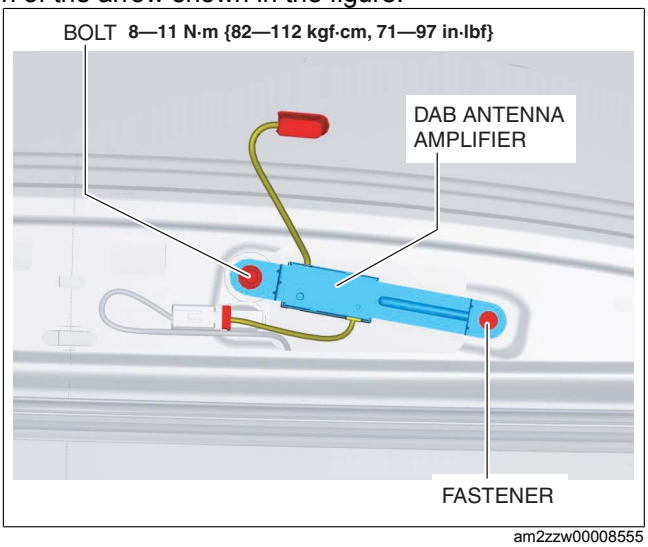

am2zzw00008555