SPEAKER [WITHOUT CENTER DISPLAY]

id0920z9010300


Purpose
- The speakers output audio based on the received audio signal from the audio unit.

Function
- Full-range speakers, which can output wide-range sound from low to high frequency, have been adopted .

Specification

Item		Front door speaker	Rear door speaker
Max. input	(W)	25	25
Rated impedance	(ohm)	3.4 — 4.6	3.4 — 4.6
Size	(cm {in})	16.5 {6.5}	16.5 {6.5}


Construction

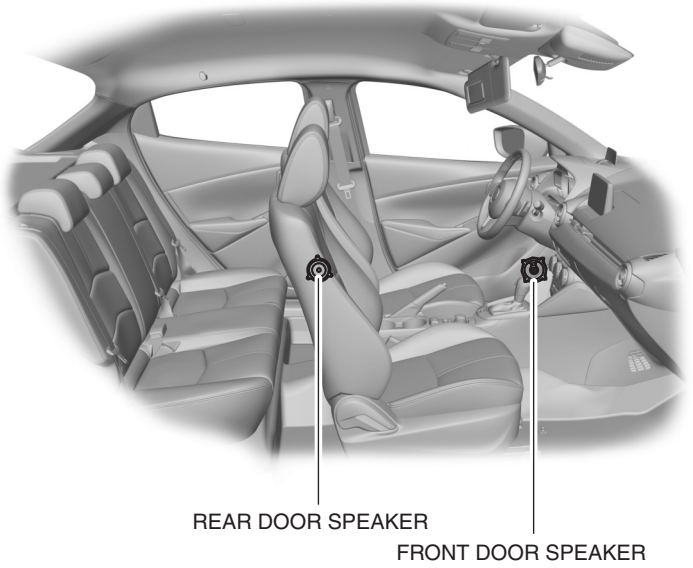

am2zzn00002733

Front door speaker/rear door speaker
- A cone-shaped dynamic speaker has been adopted for each speaker.
- A weight reduction was realized adopting pulp for the cone material and a ferrite magnet.

Operation
1. The speaker sends the audio signal (current) from the audio unit to the voice coil.
2. When the audio signal (current) is sent to the voice coil, the coil becomes magnetized and a magnetic field occurs. Because the voice coil and the magnet pull and repel each other in the magnetic field, the voice coil vibrates.
3. Because the voice coil is wrapped around the voice coil bobbin, the voice coil bobbin vibrates when the voice coil vibrates.
4. When the voice coil bobbin vibrates, the cone (diaphragm) installed to the voice coil bobbin vibrates and generates sound.

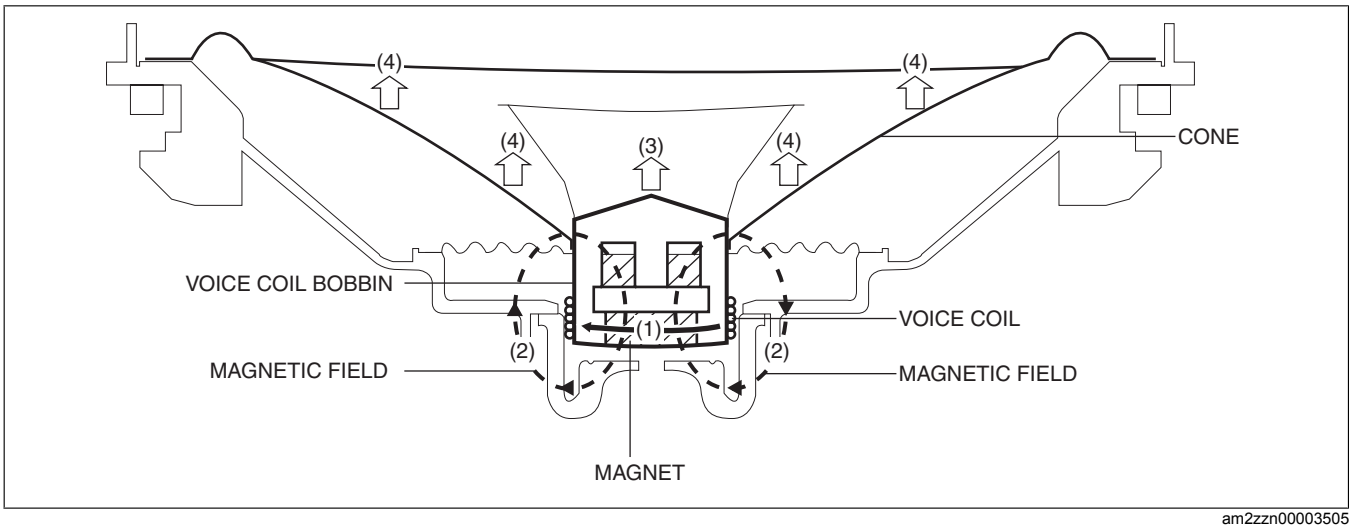

am2zzn00003505

Fail-safe

- Not applicable