SPEAKER [WITH CENTER DISPLAY]

id0920zz010300


Purpose
- The speakers output the audio based on the audio signal received from the tuner and amplifier unit (TAU).

Function
- Full-range speakers, which can output wide-range sound from low to high frequency, have been adopted .

Specification

Item		Front door speaker	Rear door speaker	Tweeter
Max. input	(W)	25	25	25
Rated impedance	(ohm)	3.4 — 4.6	3.4 — 4.6	3.4 — 4.6
Size	(cm {in})	16.5 {6.5}	16.5 {6.5}	3 {1}

Construction

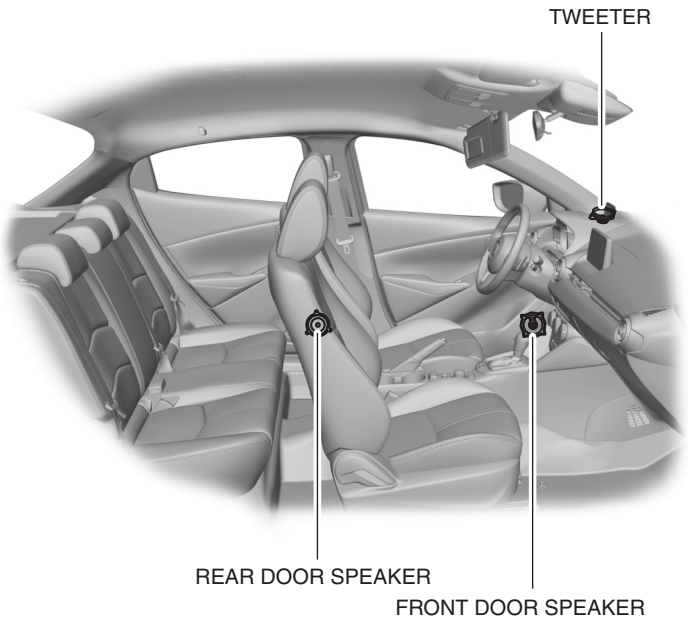


am2zzn00002757

Front door speaker/rear door speaker
- A cone-shaped dynamic speaker has been adopted for each speaker.
- Pulp for the cone material and a ferrite magnet have been adopted.

Tweeter
- A dome-type dynamic speaker has been adopted for the tweeters.
- Polyetherimide for the dome material and a ferrite magnet have been adopted.

Operation
1. The speaker sends the audio signal (current) from the TAU to the voice coil.
2. When the audio signal (current) is sent to the voice coil, the coil becomes magnetized and a magnetic field occurs. Because the voice coil and the magnet pull and repel each other in the magnetic field, the voice coil vibrates.
3. Because the voice coil is wrapped around the voice coil bobbin, the voice coil bobbin vibrates when the voice coil vibrates.
4. When the voice coil bobbin vibrates, the cone (diaphragm) installed to the voice coil bobbin vibrates and generates sound.

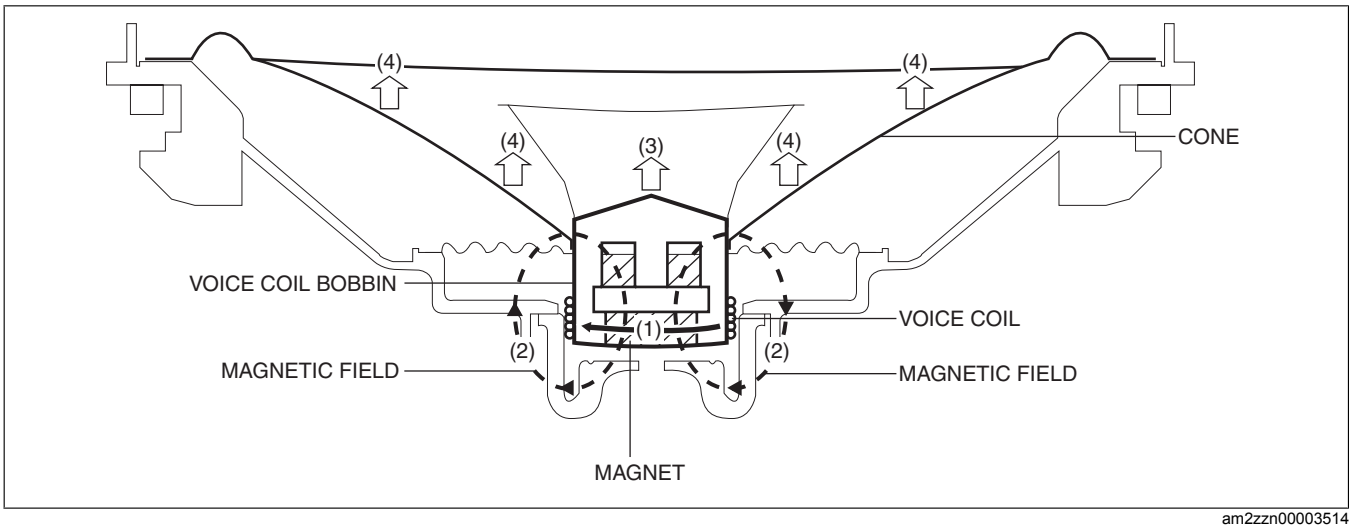

am2zzn00003514

Fail-safe

- Not applicable