
## HORN REMOVAL/INSTALLATION

id092200012600

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/ CONNECTION.)
2. Remove the front bumper. (See FRONT BUMPER REMOVAL.) (See FRONT BUMPER INSTALLATION.)
3. Remove the ground bolt.

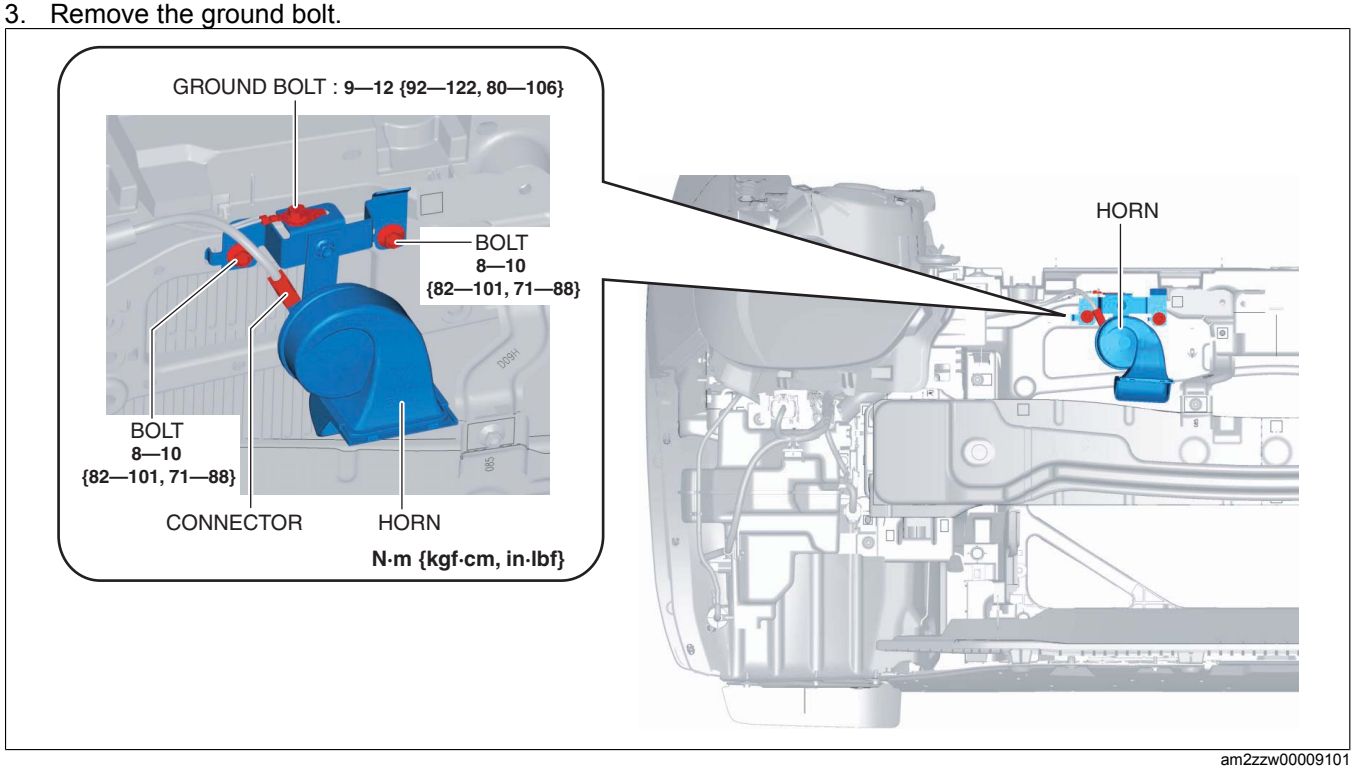


am2zzw00009101

4. Disconnect the connector.
5. Remove the bolt.
6. Remove the horn.
7. Install in the reverse order of removal.