FRONT SIDE FRAME REMOVAL [PANEL REPLACEMENT]

id098008605900

Symbol Marks

SYMBOL MARK	MEANING
●	SPOT WELDING


am2zzb00000461

Removal Procedure

1. Drill the 11 locations indicated by (A) shown in the figure.
2. Drill the 9 locations indicated by (B) shown in the figure.
3. Drill the 6 locations indicated by (C) from front wheel housing shown in the figure.

Note

- When drilling the 6 locations indicated by (C) shown in the figure, do not drill a hole all the way through or there could be a problem when installing the new part.

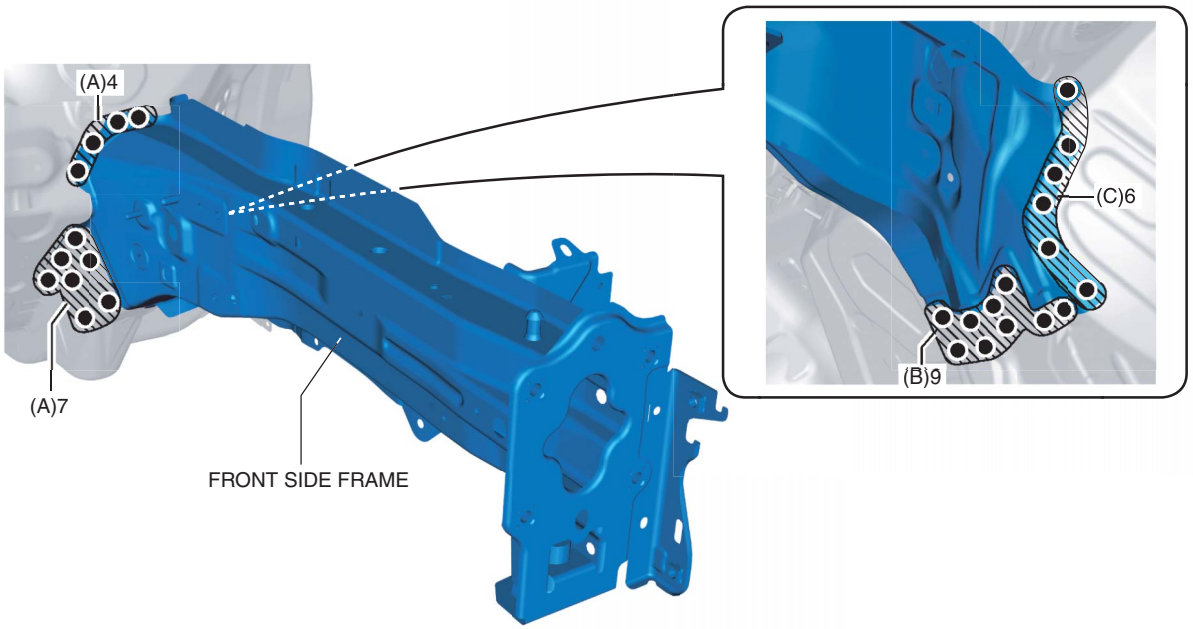

am2zzb00000462

4. Remove the front side frame.