REAR FENDER PANEL (LOWER) REMOVAL [PANEL REPLACEMENT]

id098008614300

Symbol Marks


SYMBOL MARK	MEANING
●	SPOT WELDING

am2zzb00000526

Removal Procedure

4SD

1. Drill the 23 locations indicated shown in the figure.

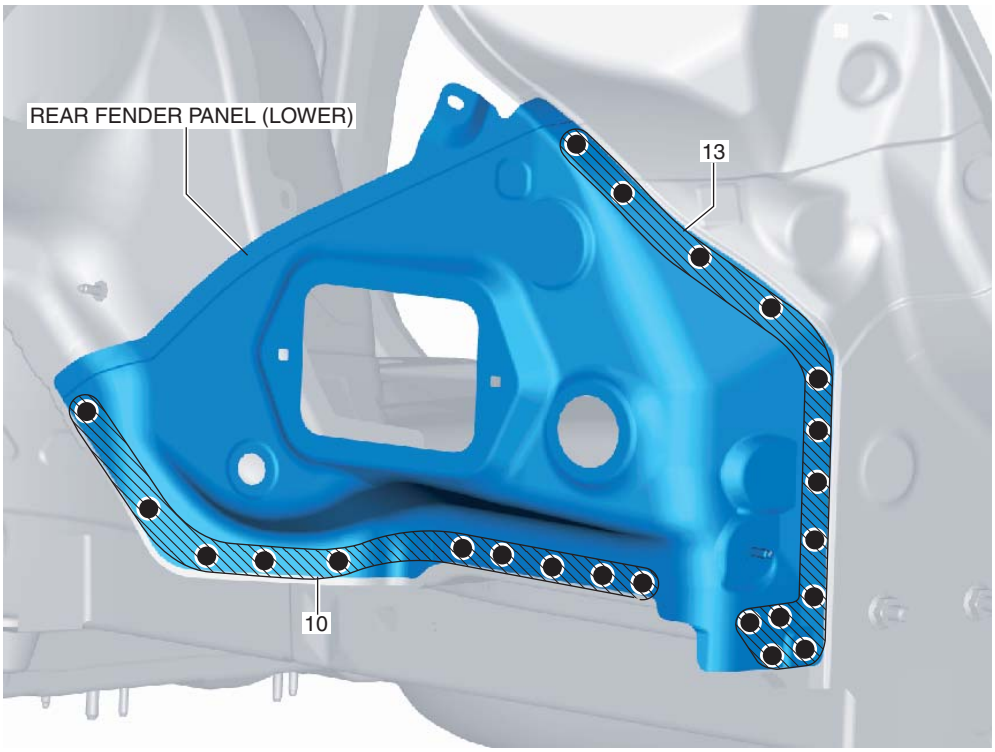


am2zzb00000623

2. Remove the rear fender panel (lower).

5HB

1. Drill the 15 locations indicated shown in the figure.

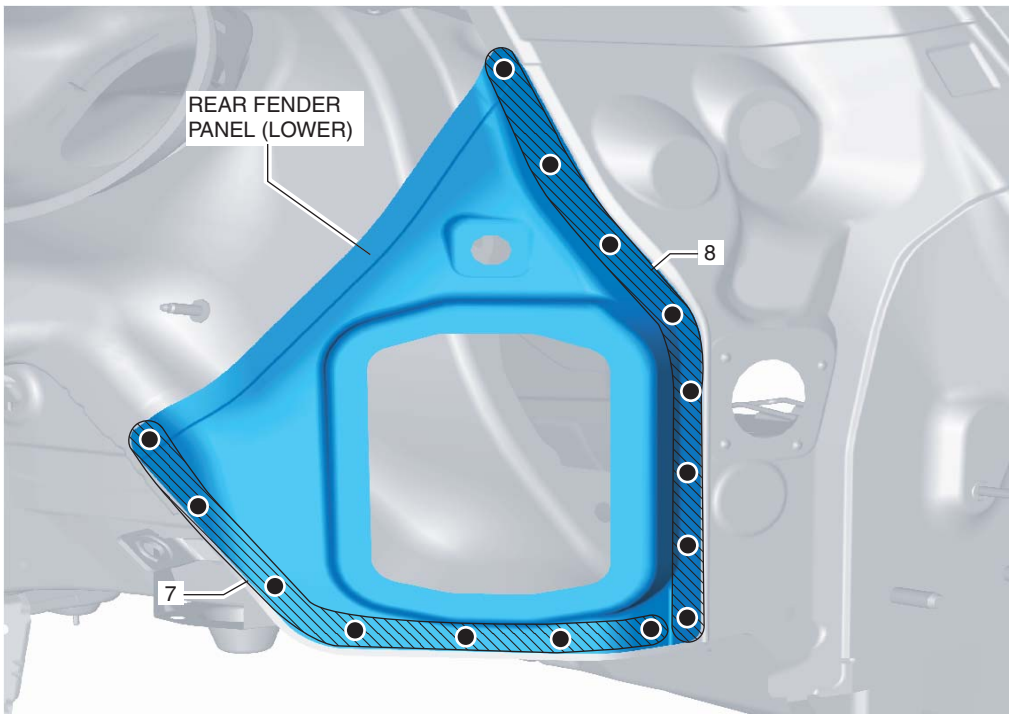

am2zzb00000527

2. Remove the rear fender panel (lower).