REAR FENDER PANEL (LOWER) INSTALLATION [PANEL REPLACEMENT]

id098008614400

Symbol Marks


SYMBOL MARK	MEANING
●	SPOT WELDING
■	PLUG WELDING (ARC WELDING)

am2zzb00000528

Installation Procedure

4SD


1. When installing new parts, measure and adjust the body as necessary to conform with standard dimensions.
2. Drill holes for the plug welding before installing the new parts.
3. After temporarily installing new parts, make sure the related parts fit properly.
4. Plug weld the 13 locations indicated by (A) shown in the figure.
5. Spot weld the 13 locations indicated by (B) shown in the figure, then install the rear fender panel (lower).

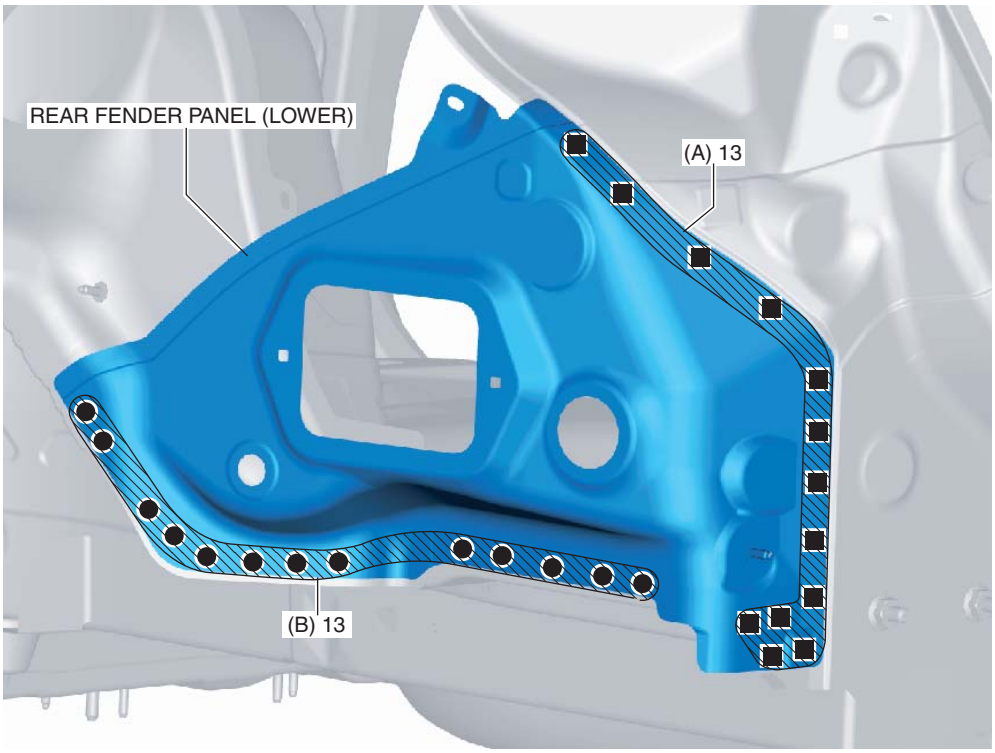

am2zzb00000624

5HB

1. When installing new parts, measure and adjust the body as necessary to conform with standard dimensions.
2. Drill holes for the plug welding before installing the new parts.
3. After temporarily installing new parts, make sure the related parts fit properly.
4. Plug weld the 15 locations indicated shown in the figure, then install the rear fender panel (lower).

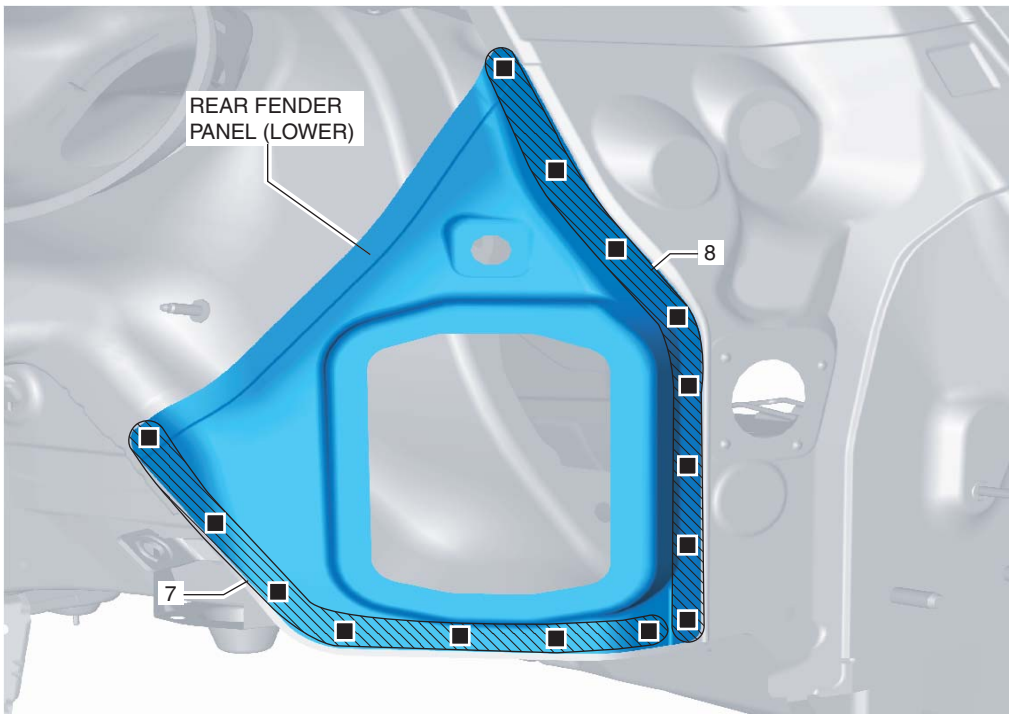

am2zzb00000529