REAR END PANEL REMOVAL [PANEL REPLACEMENT]

id098008744500

Symbol Marks


SYMBOL MARK	MEANING
●	SPOT WELDING
+	ARC WELDING (SPOT WELDING)

am2zzb00000549

Removal Procedure


4SD

1. Drill the 18 locations indicated by (A) shown in the figure, then remove the trunk floor reinforcement.

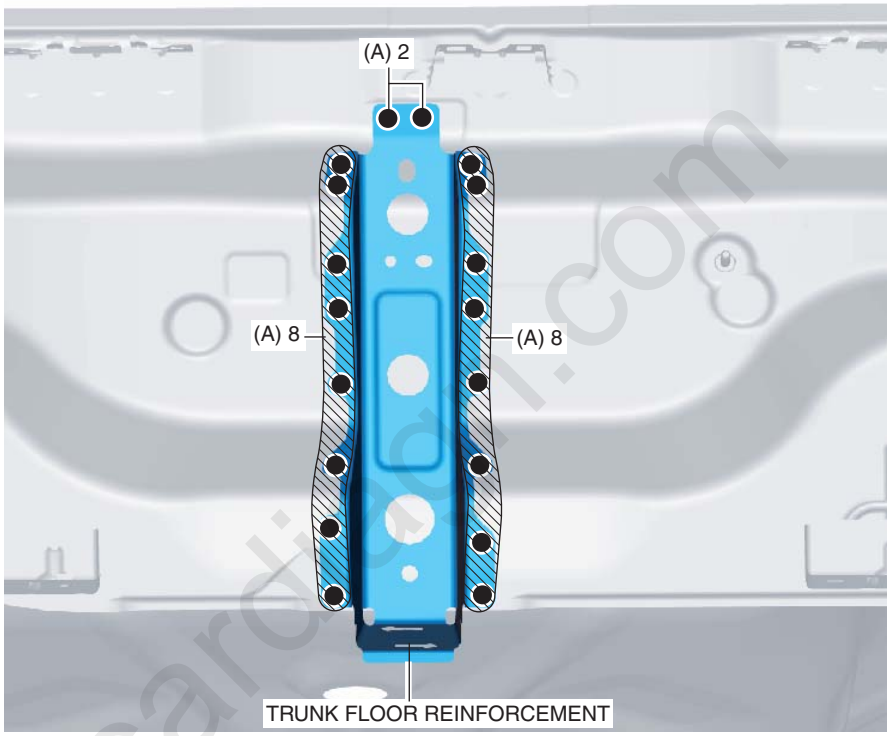


am2zzb00000588

2. Drill the 14 locatuin indicated by (B) shown in the figure, then open the end of rear fender panel (lower).

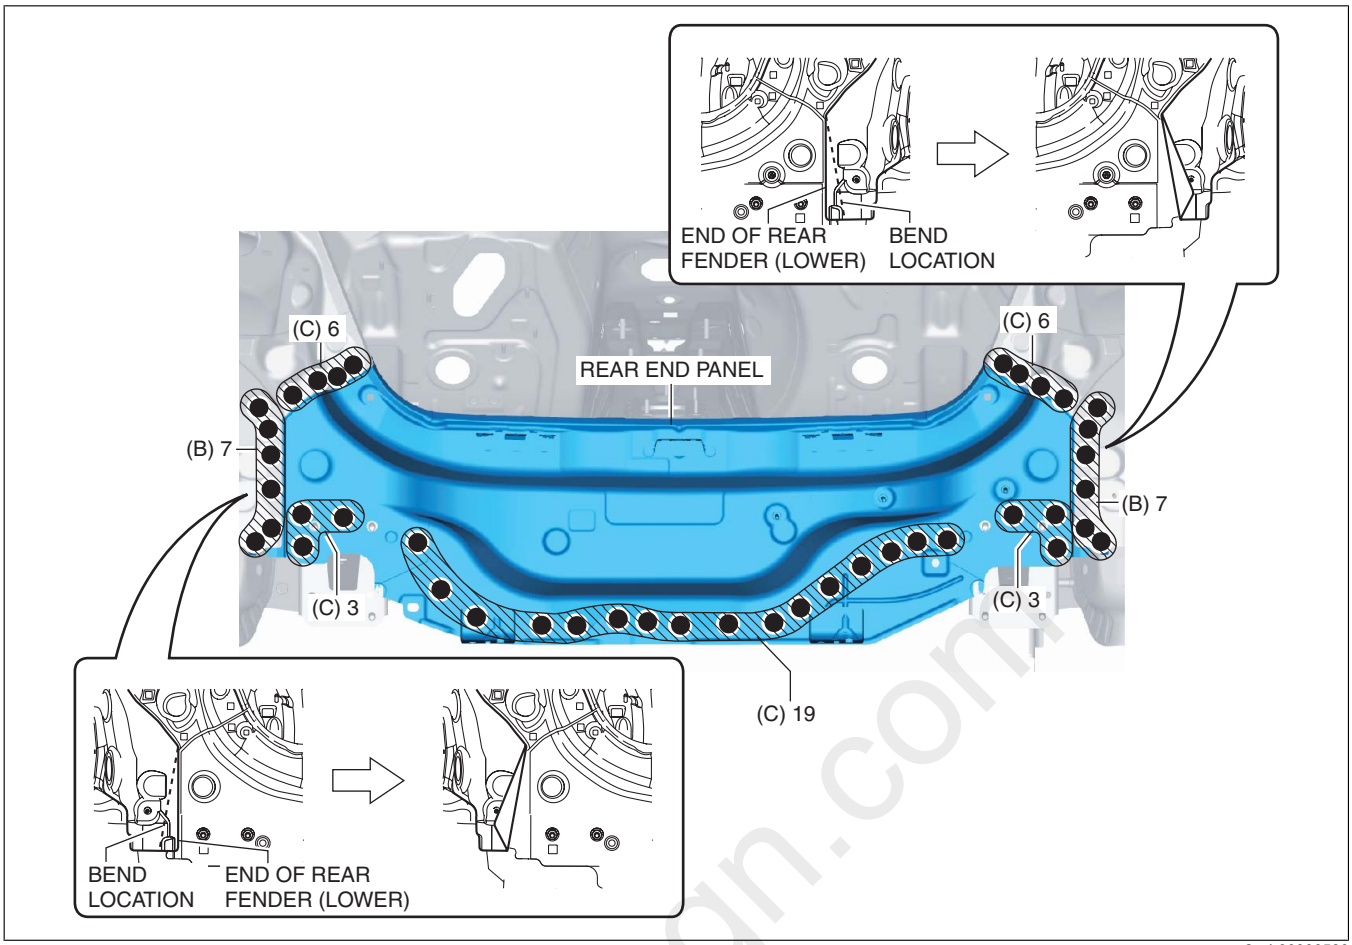


am2zzb00000589

3. Drill the 37 locations indicated by (C) shown in the figure.
4. Drill the 2 locations indicated by (D) from room side shown in the figure.

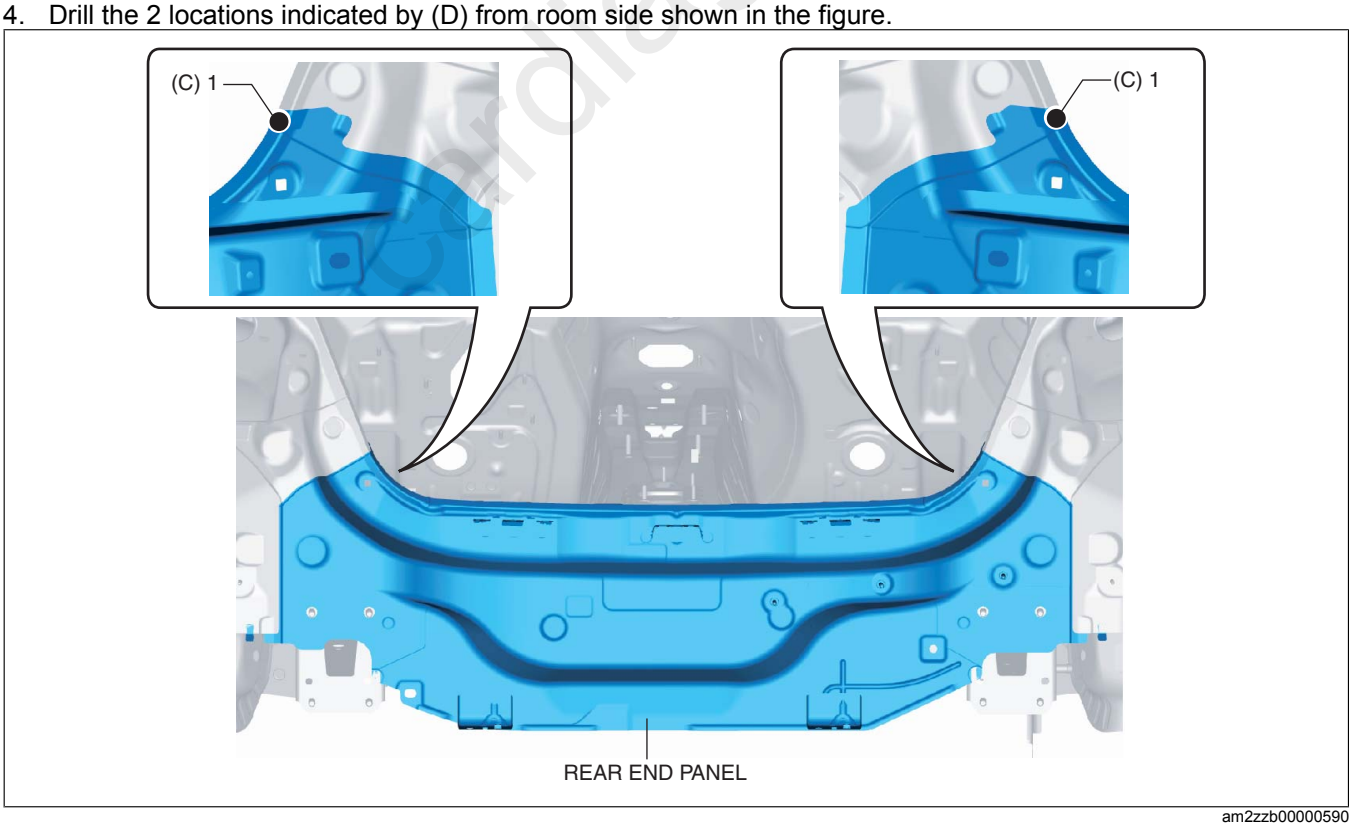

am2zzb00000590


5. After lowering the rear end panel in the direction of arrow (1) shown in the figure, pull it out in the direction of arrow (2).

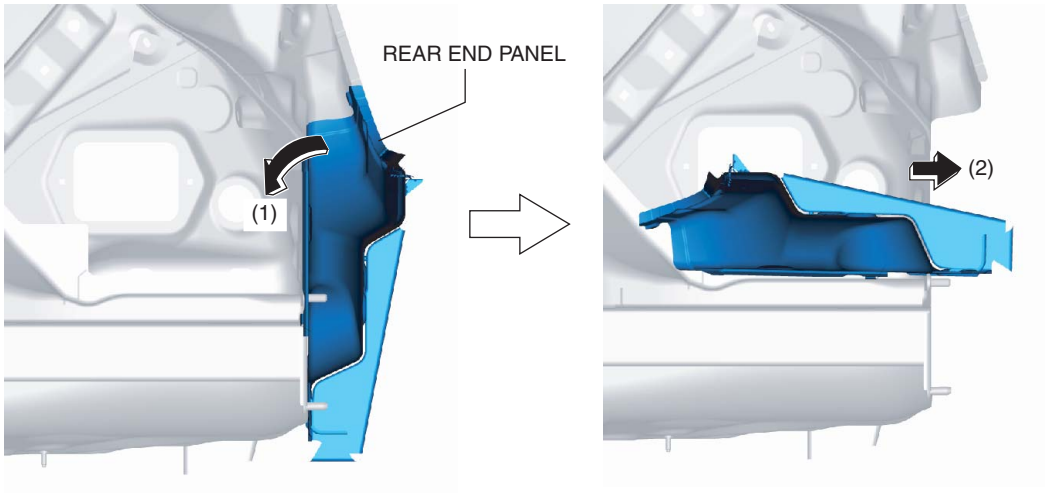

am2zzb00000591

5HB


1. Drill the 8 locations indicated by (A) shown in the figure, then remove the trunk floor reinforcement.

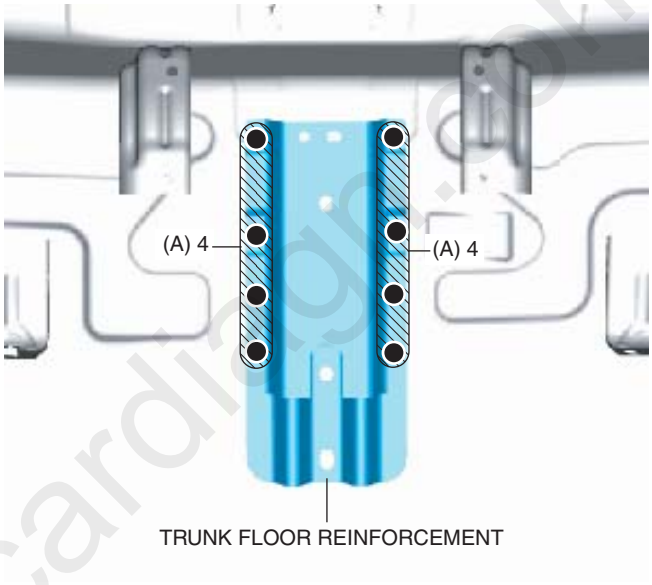

am2zzb00000704


2. Drill the 10 locations indicated by (B) shown in the figure, then open the end of rear fender panel (lower).

cardiagn.com

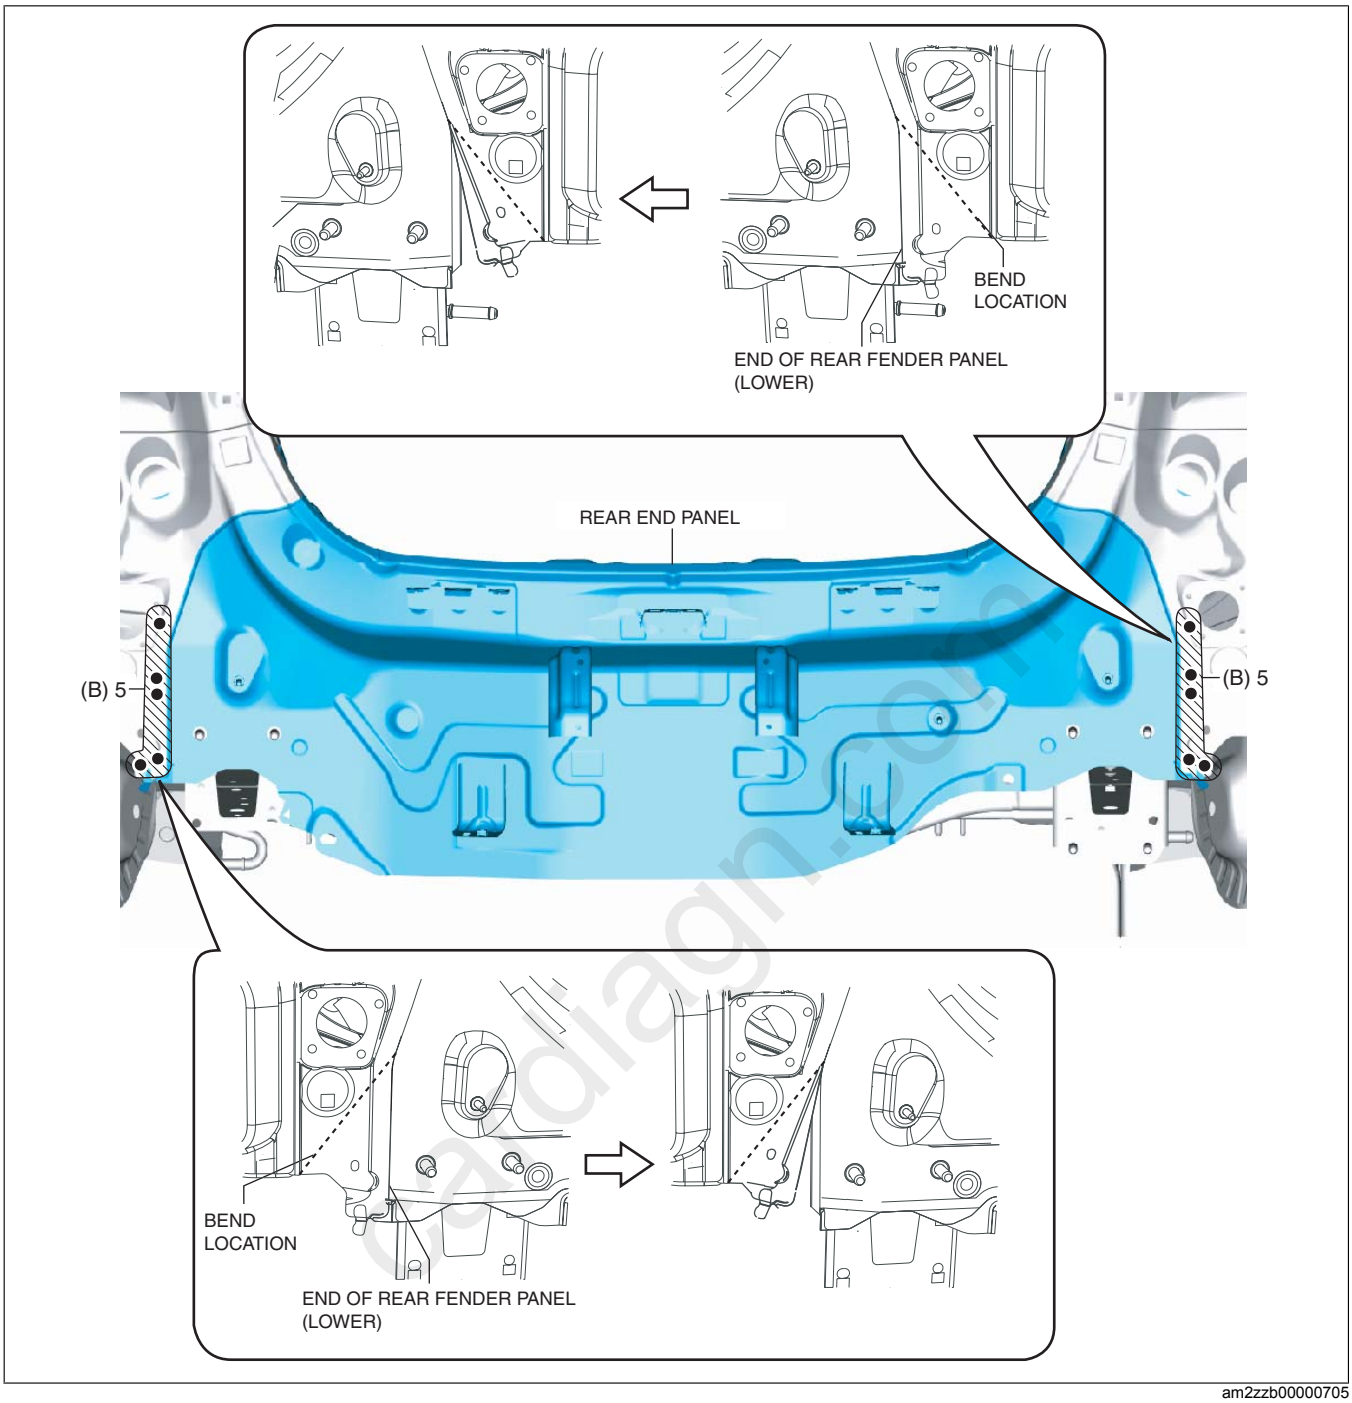


am2zzb00000705

3. Drill the 14 locations indicated by (C) shown in the figure.

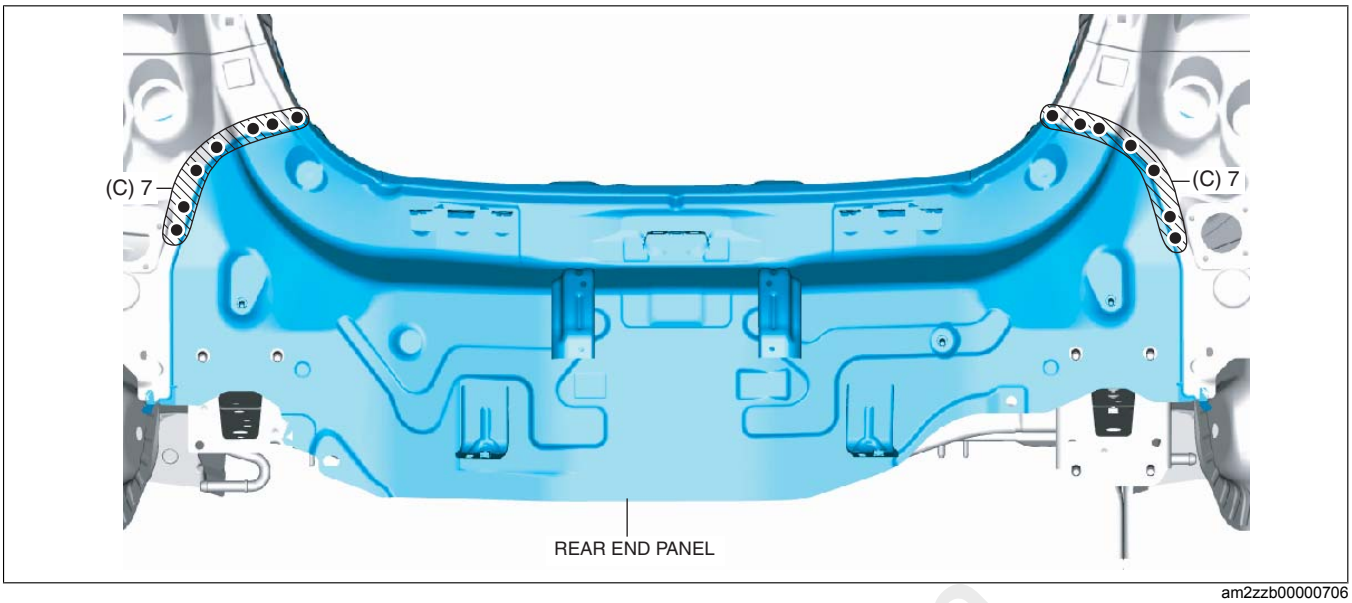


am2zzb00000706

4. Drill the 4 locations indicated by (D) from the room side shown in the figure.
5. Grind the 8 locations indicated by (E) from the room side shown in the figure.
6. Drill the 37 locations indicated by (F) shown in the figure.

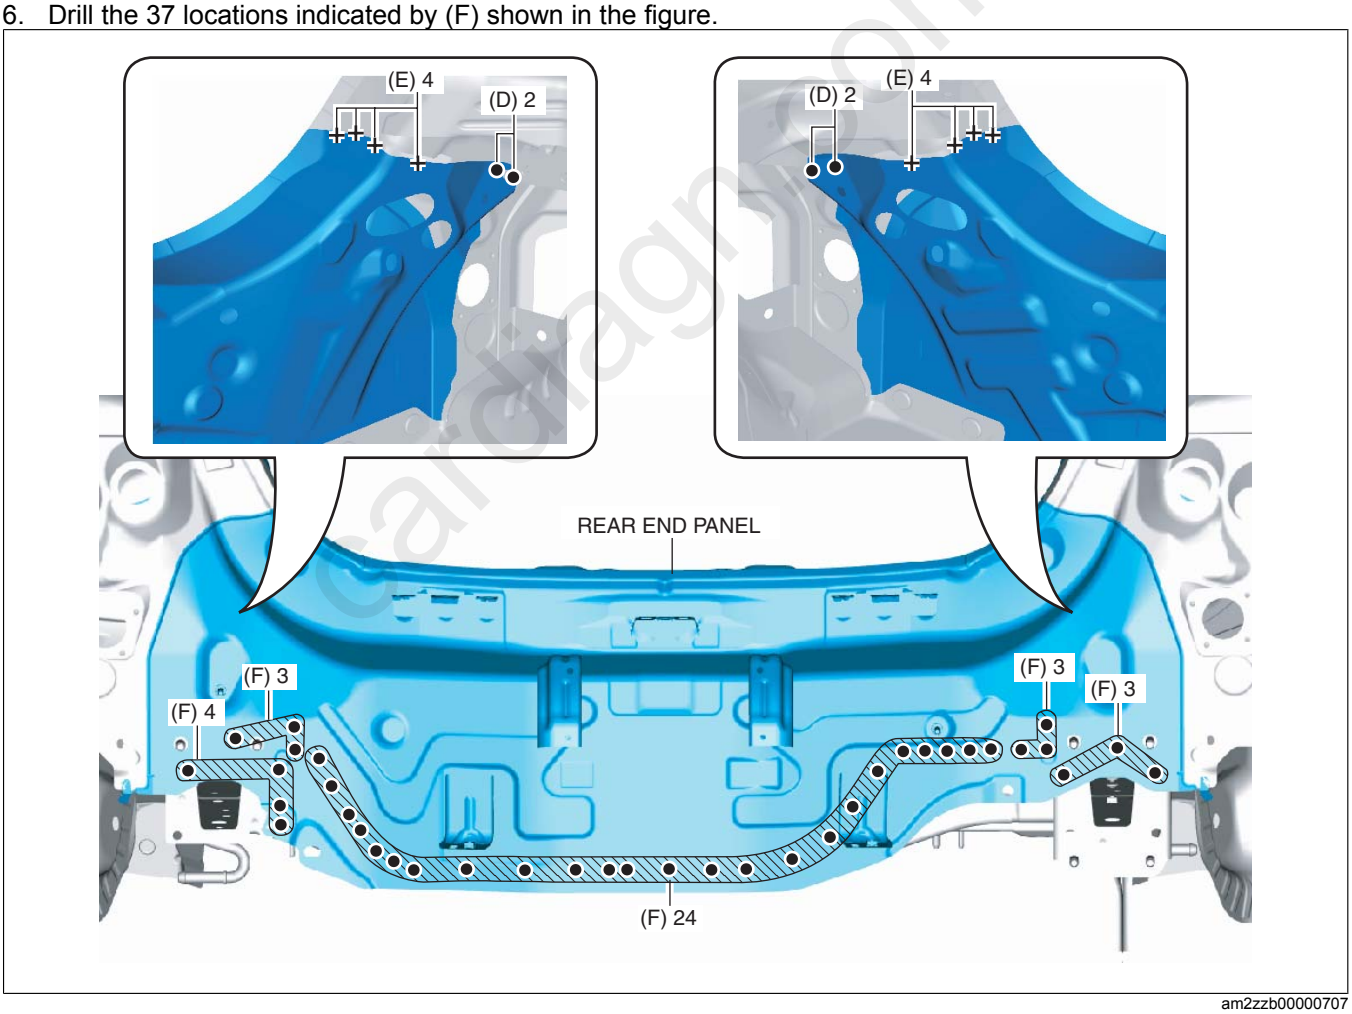

am2zzb00000707

7. After lowering the rear end panel in the direction of arrow (1) shown in the figure, pull it out in the direction of arrow (2).

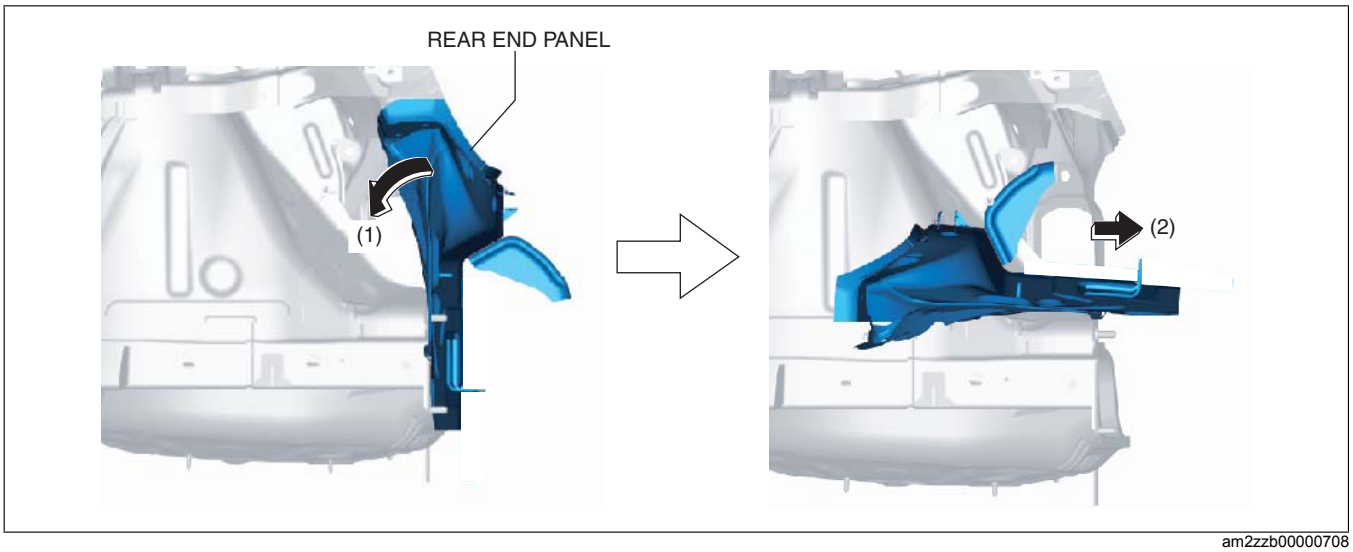

am2zzb00000708

cardiagn.com