REAR FENDER PANEL REMOVAL [PANEL REPLACEMENT]

id098008744900


Symbol Marks

SYMBOL MARK	MEANING
●	SPOT WELDING
⏦	ROUGH CUT LOCATION

am2zzb00000517


Removal Procedure
4SD

Caution
- **Avoid cutting with a blowtorch or similar tools as the insulator is flammable shown in the figure.**

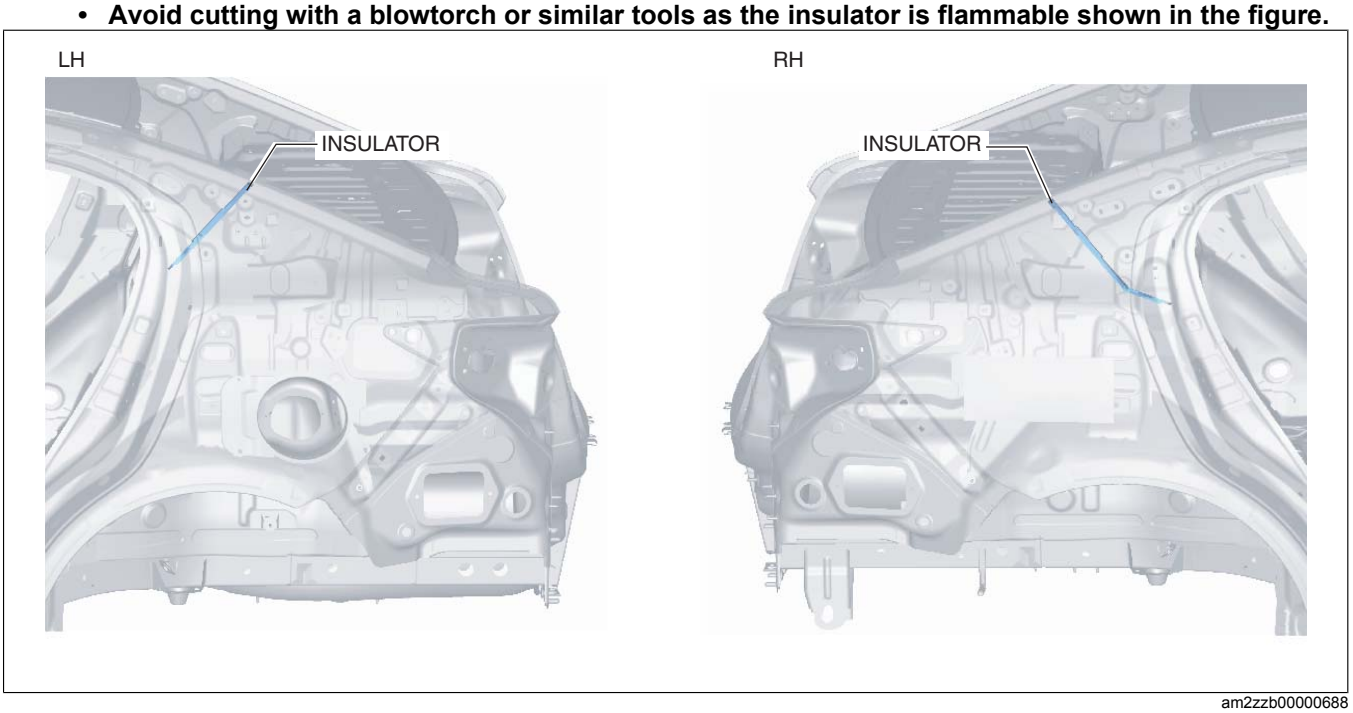


am2zzb00000688

1. Rough cut the 2 locations indicated by (A) shown in the figure

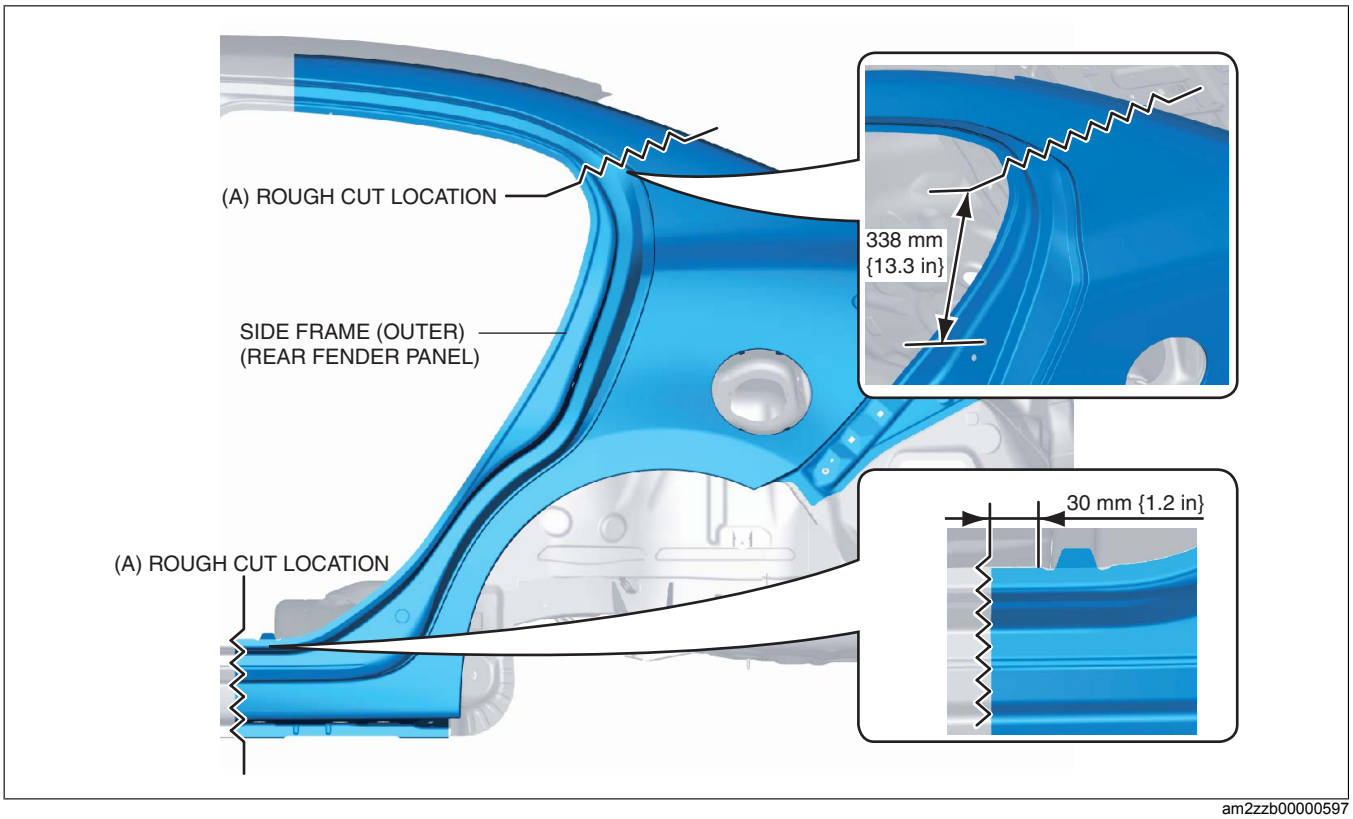


am2zzb00000597

2. Drill the 79 locations indicated by (B) shown in the figure.

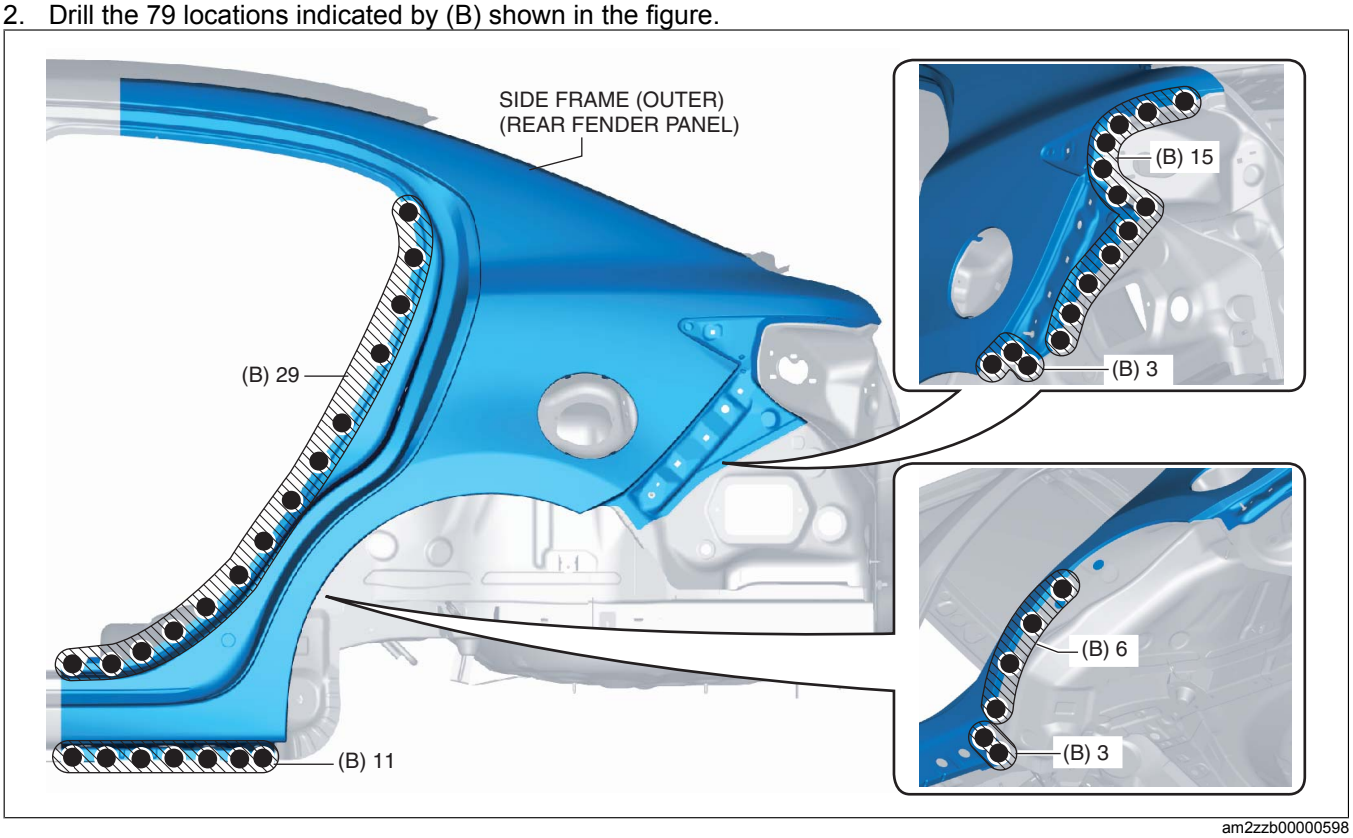

am2zzb00000598

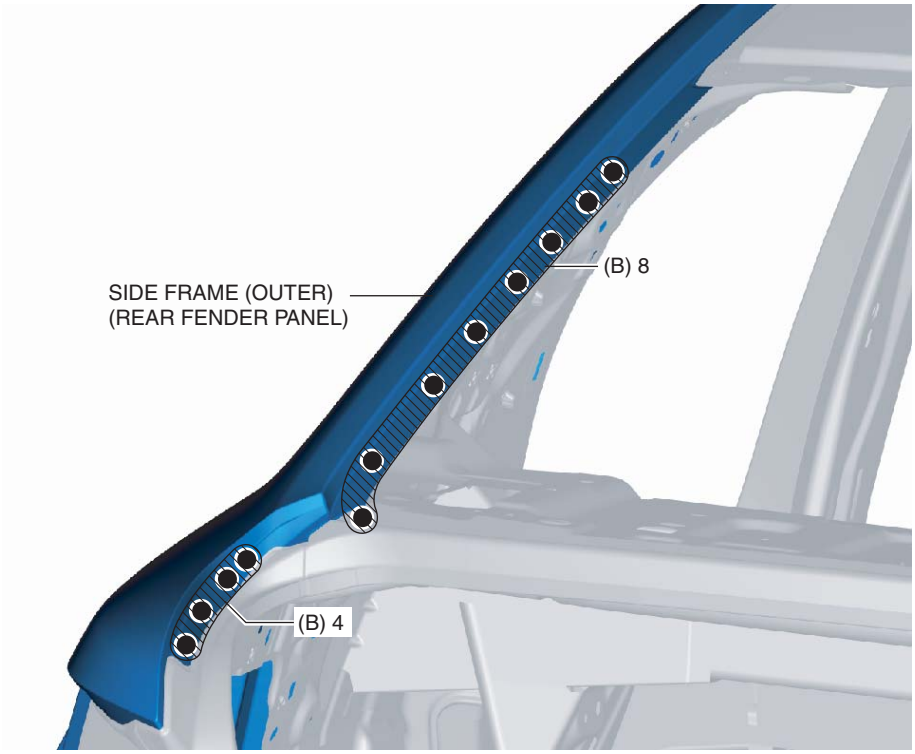


am2zzb00000599

3. Remove the side frame (outer) (rear fender panel).


5HB

Caution
- **Avoid cutting with a blowtorch or similar tools as the insulator is flammable shown in the figure.**

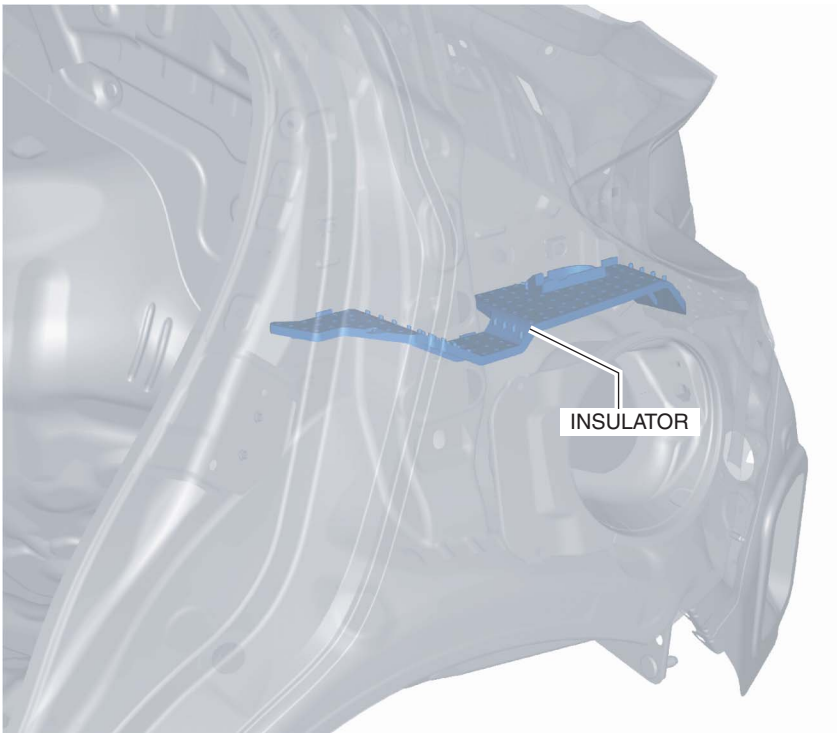


am2zzb00000518

1. Rough cut the 2 locations indicated by (A) shown in the figure.
2. Drill the 16 locations indicated by (B) shown in the figure, then remove the part of side frame (outer) (rear fender panel).

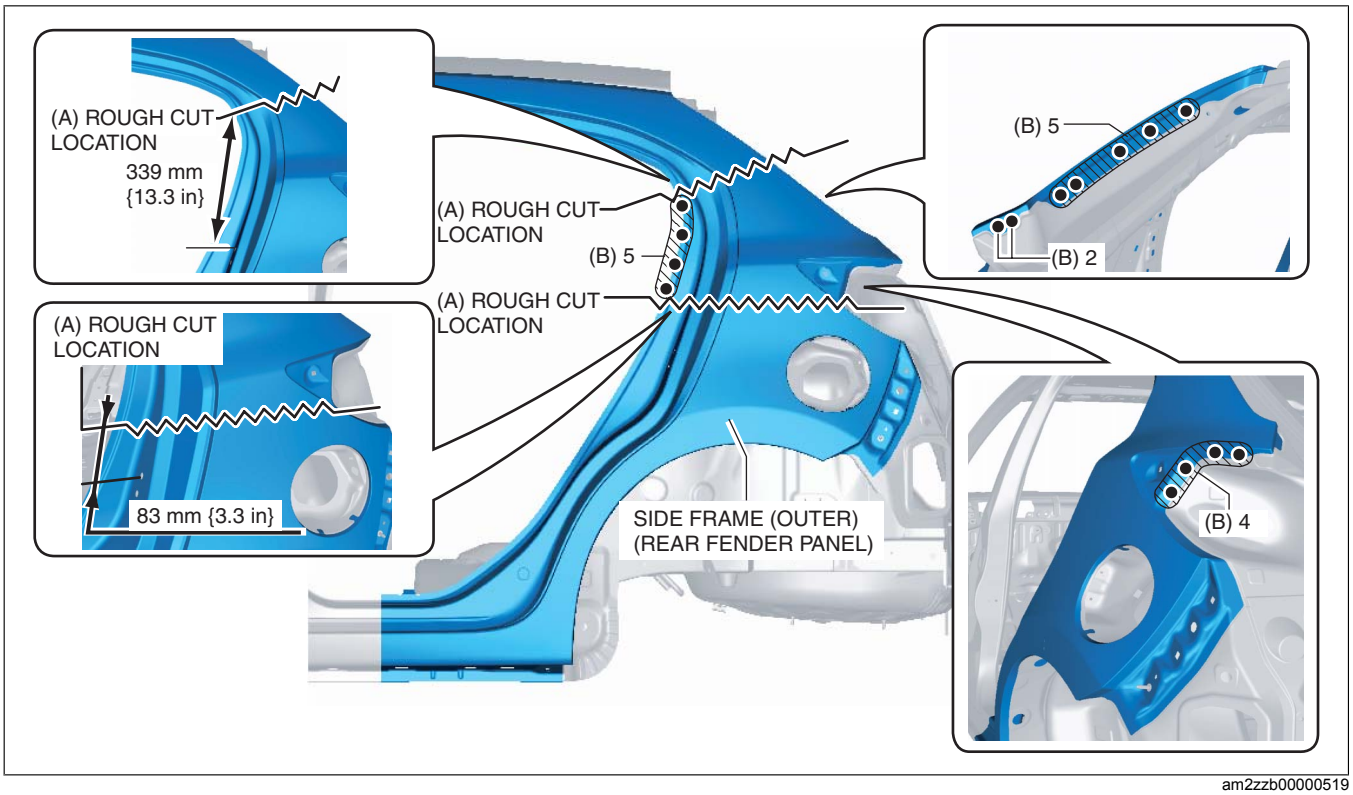


am2zzb00000519

3. Use the scissors and cut the insulator.

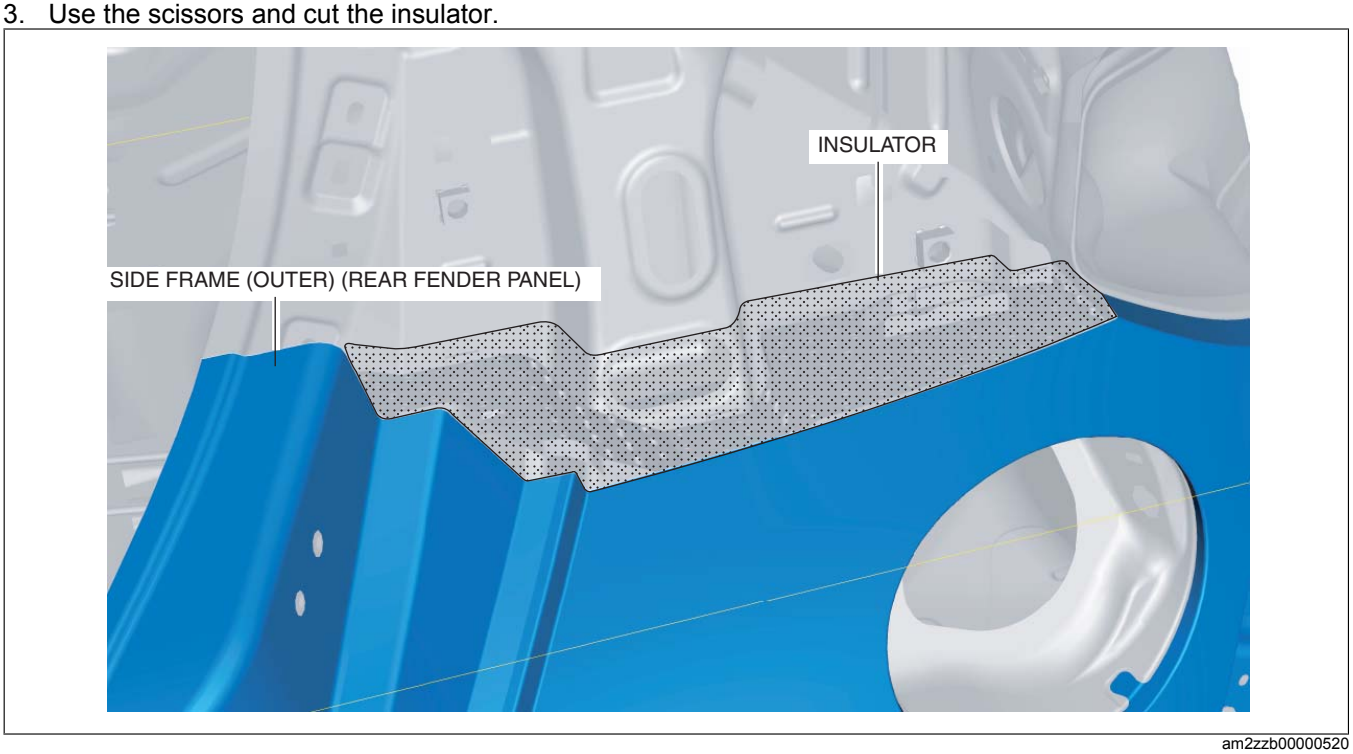

am2zzb00000520

4. Rough cut the location indicated by (C) shown in the figure.
5. Drill the 61 locations indicated by (D) shown in the figure.

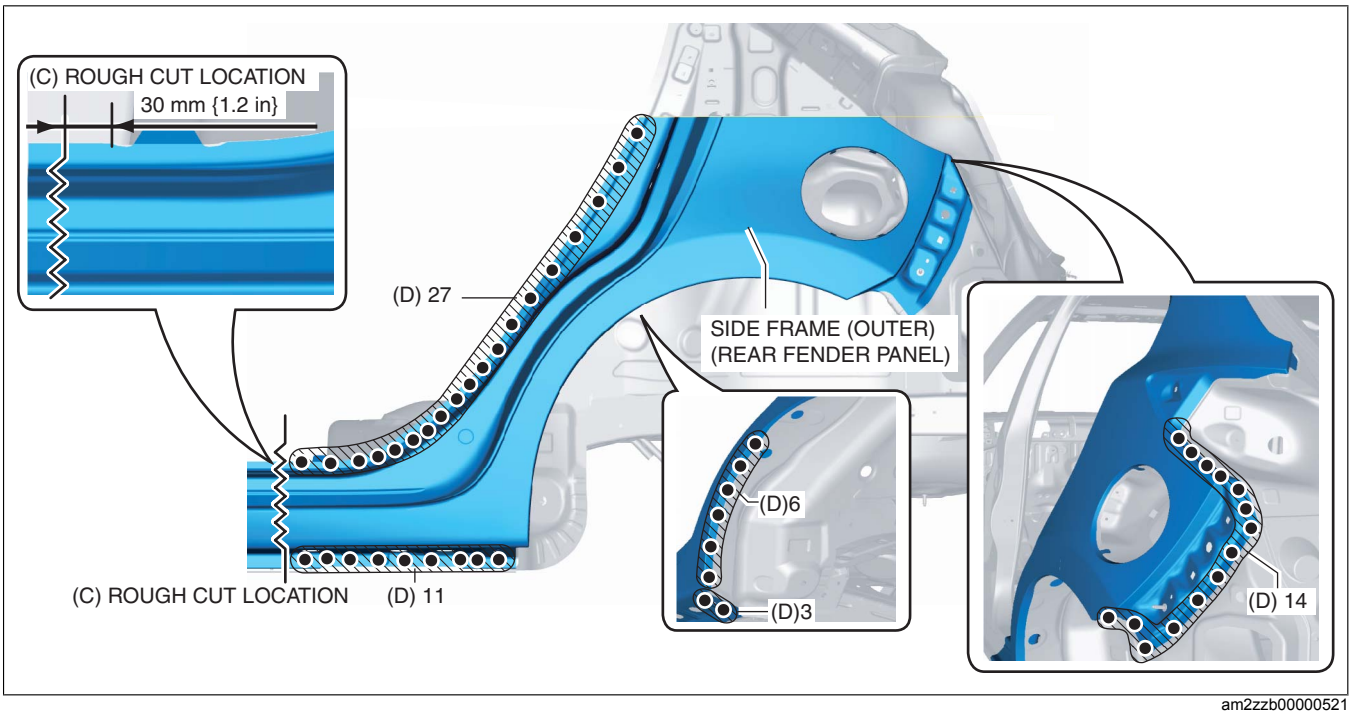

am2zzb00000521

6. Remove the side frame (outer) (rear fender panel).