REAR FENDER PANEL INSTALLATION [PANEL REPLACEMENT]

id098008745000

Symbol Marks

SYMBOL MARK	MEANING
■	PLUG WELDING (ARC WELDING)
─┼┼┼┼┼┼┼┼┼┼┼┼┼┼┼┼┼┼┼┼─	CONTINUOUS ARC WELDING (CUT-AND-JOIN LOCATION)

am2zzb00000522

Installation Procedure

4SD

1. When installing new parts, measure and adjust the body as necessary to conform with standard dimensions.
2. Drill holes for the plug welding before installing the new parts.
3. After temporarily installing new parts, make sure the related parts fit properly.
4. Before installing new parts, apply body sealer to the wheel arch line.

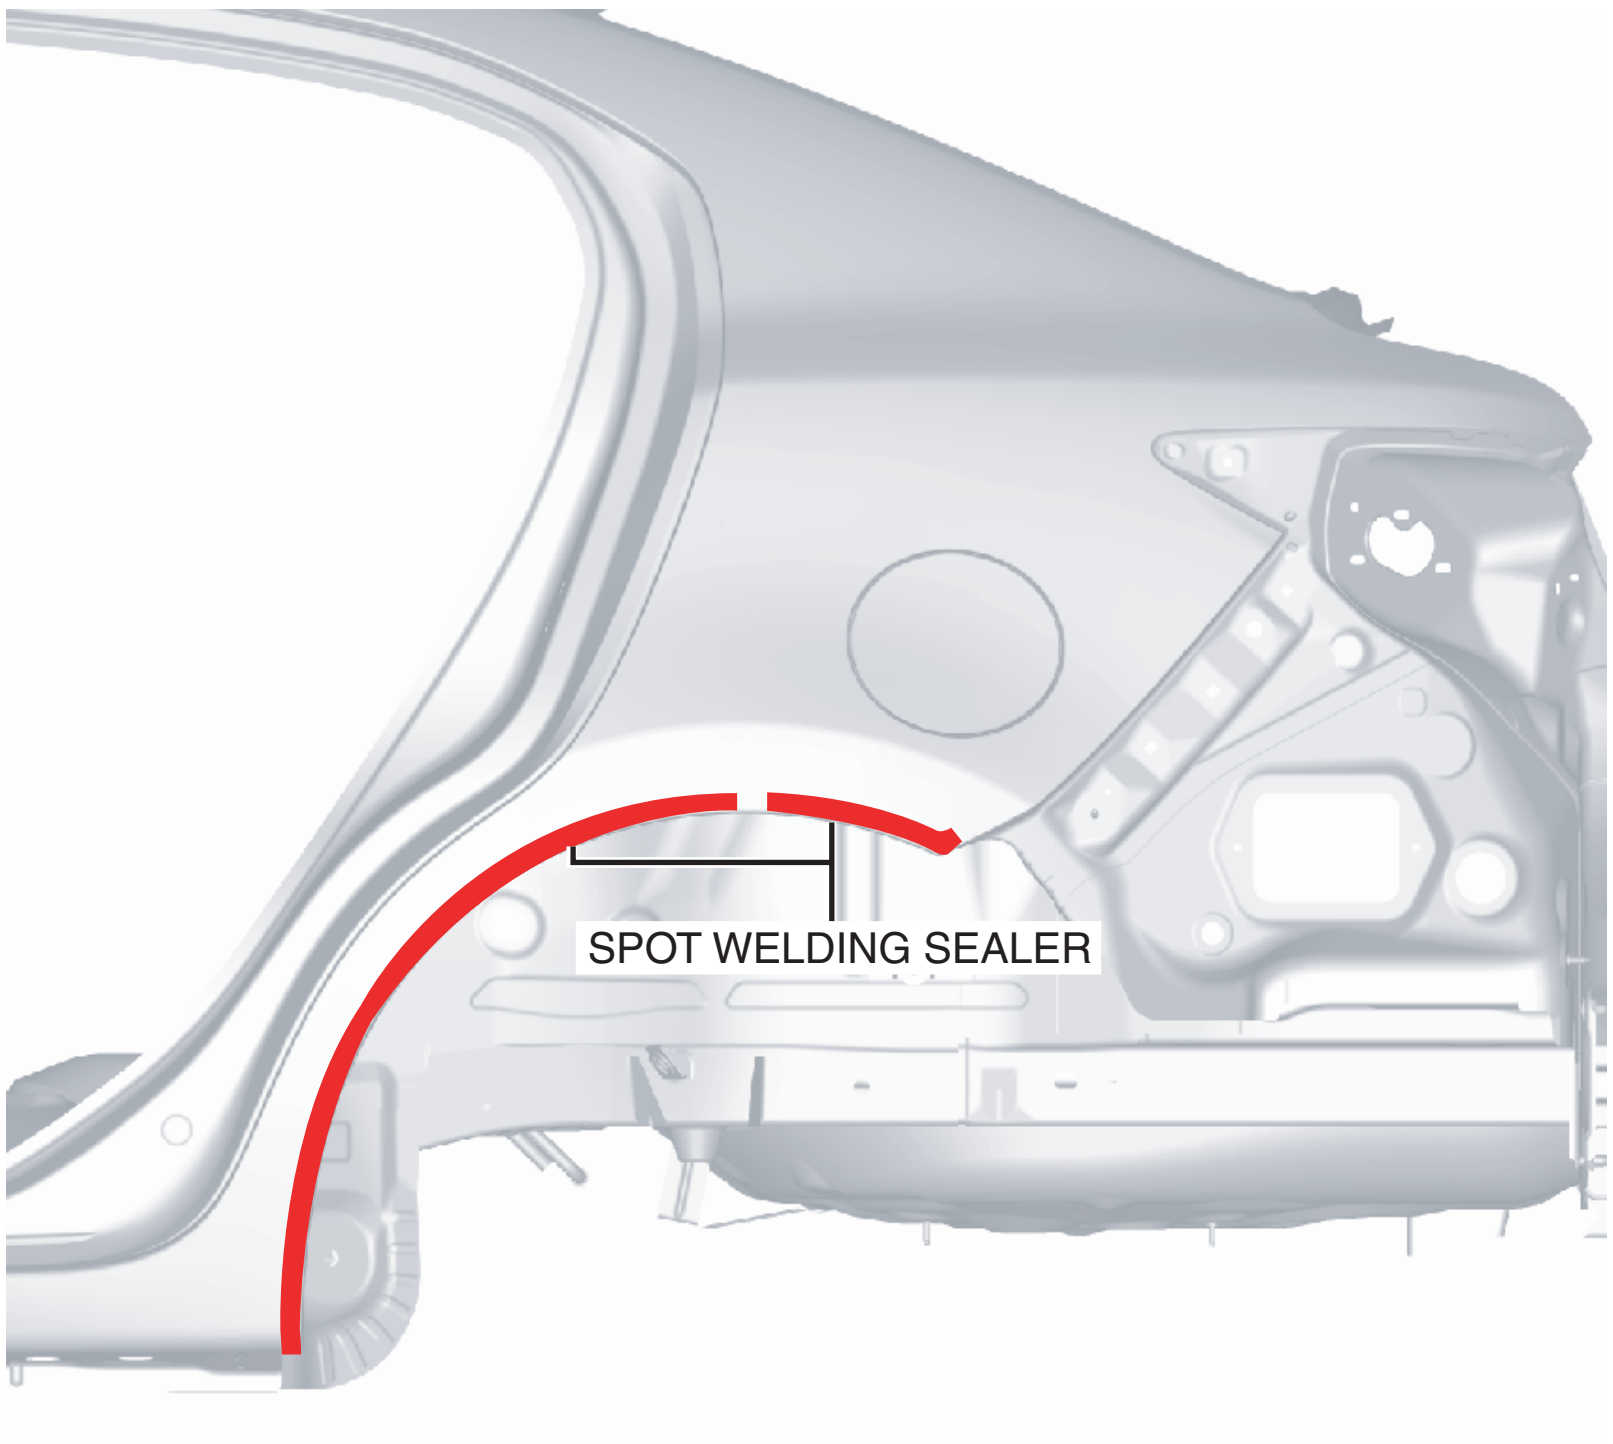

am2zzb00000600

5. Cut and join 2 locations indicated by (A) shown in the figure.

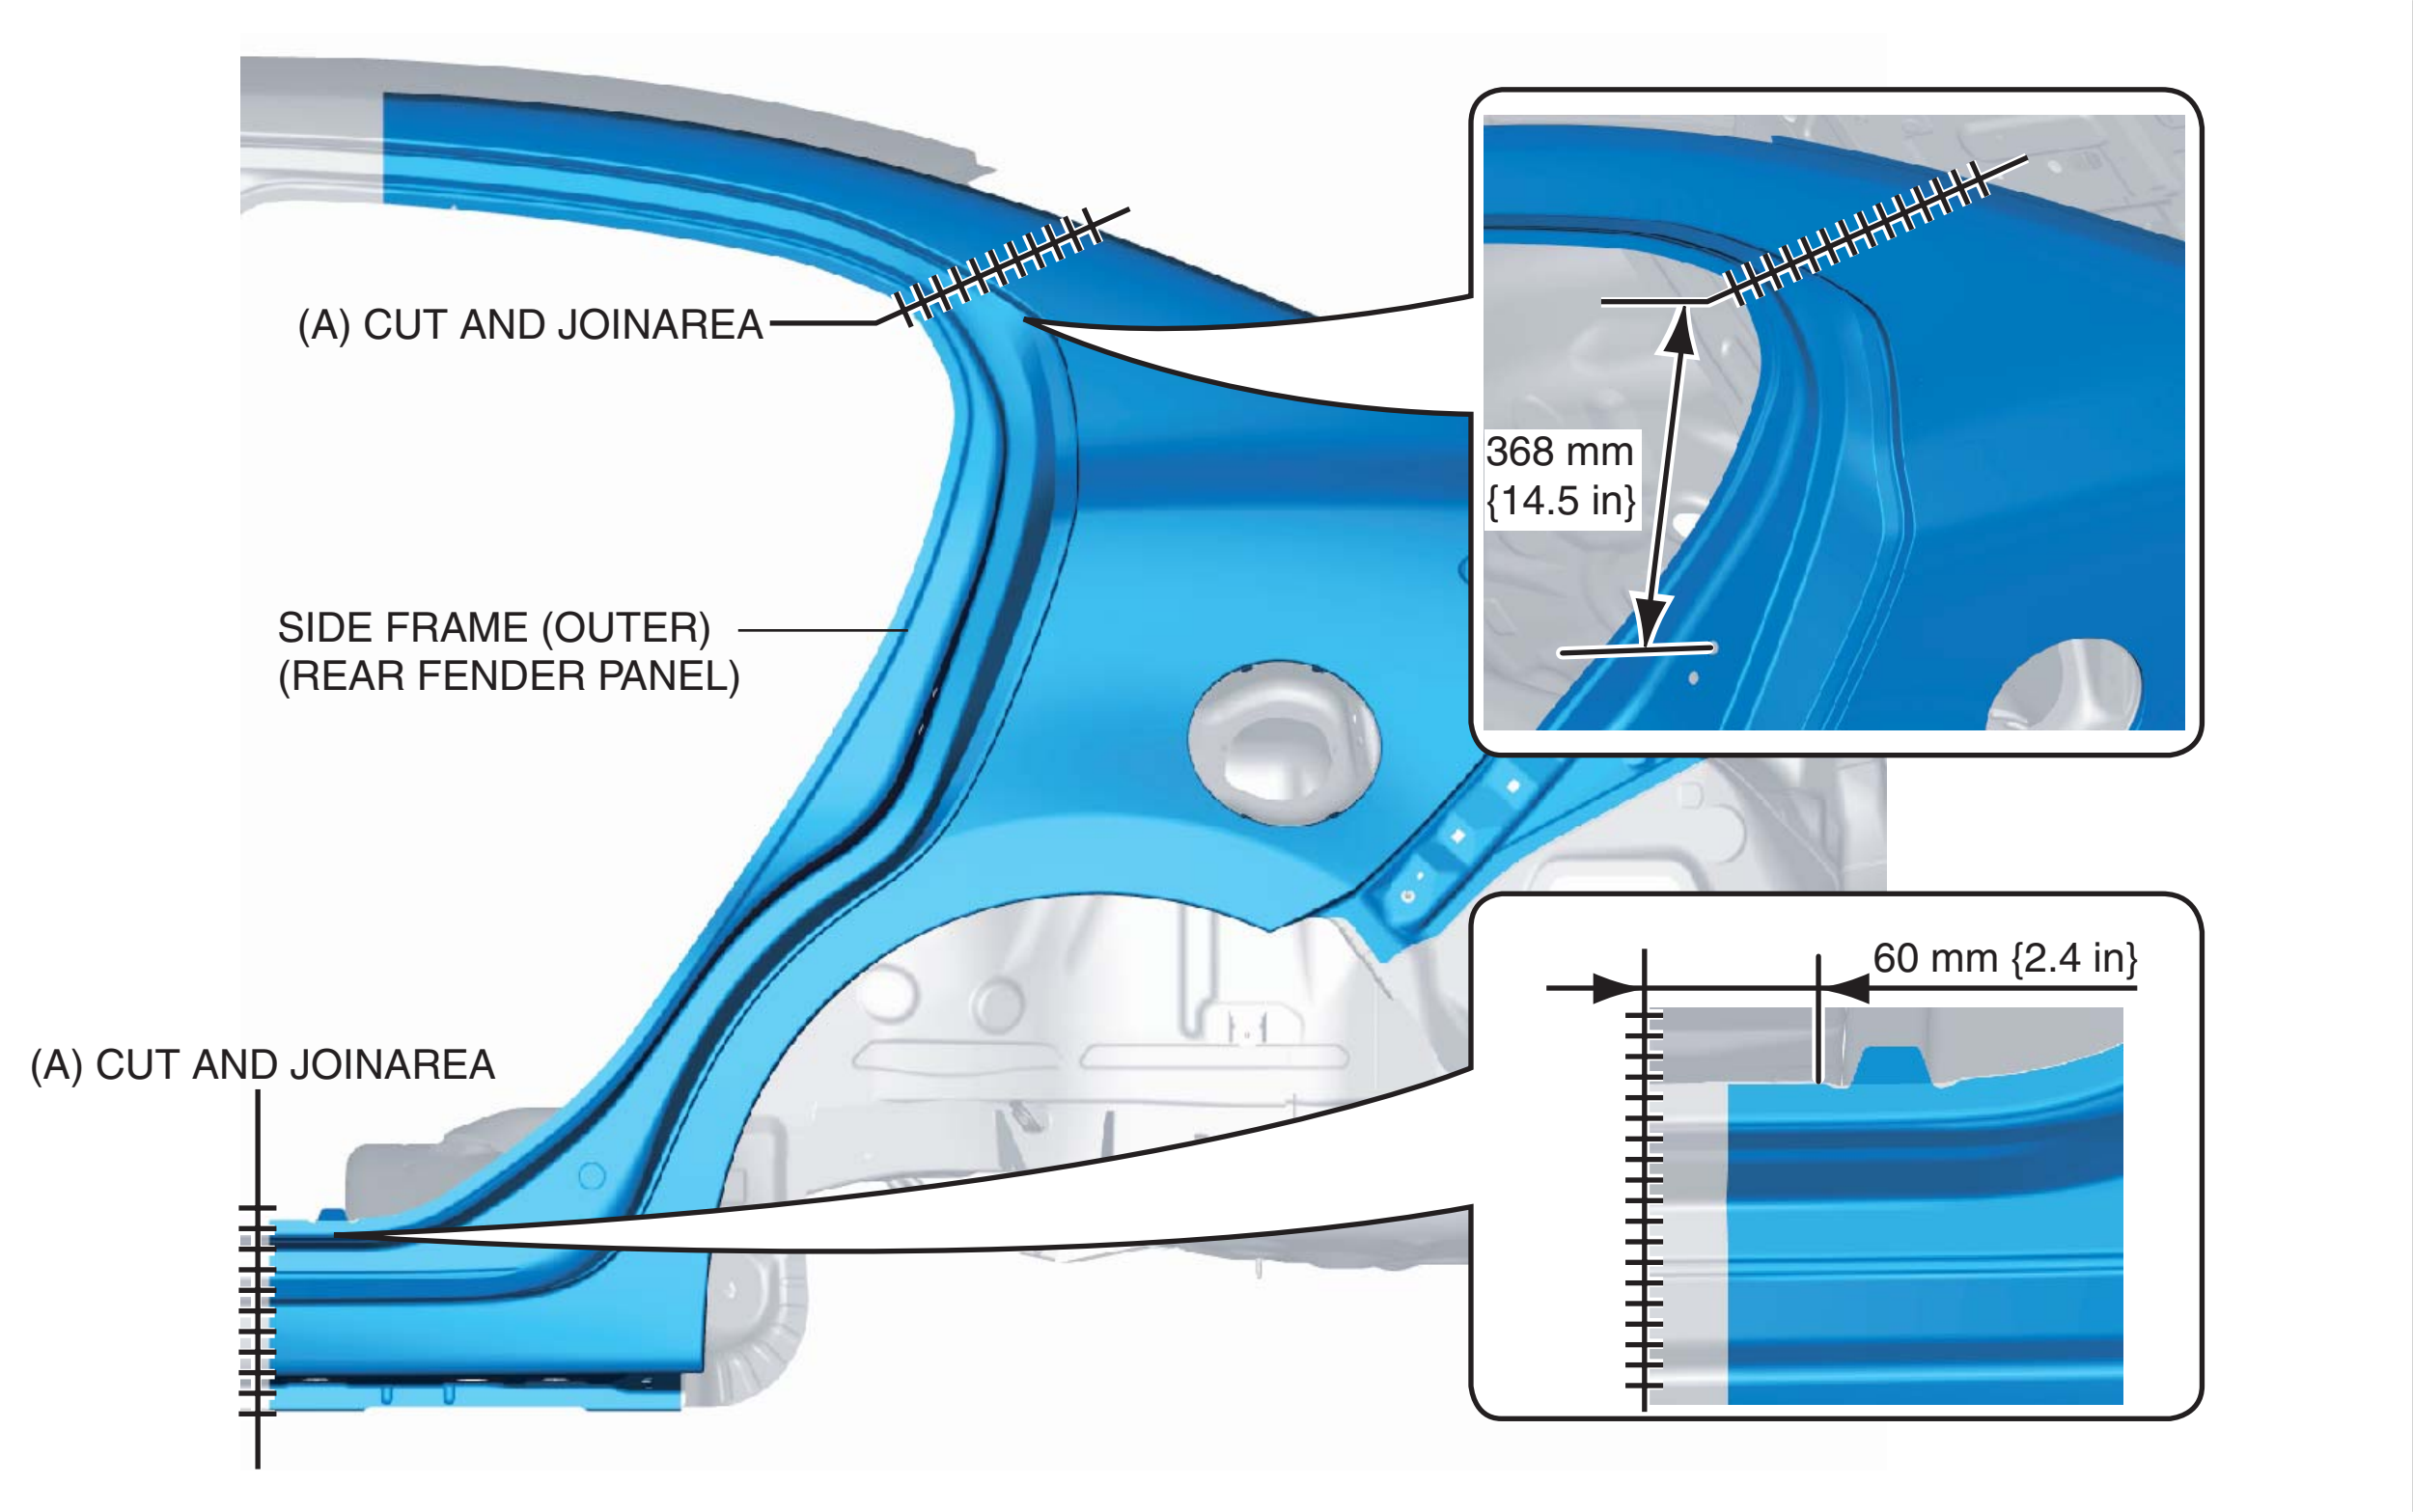

am2zzb00000601

6. Plug weld the 82 locations indicated by (B) shown in the figure, then install the side frame (outer) (rear fender panel).

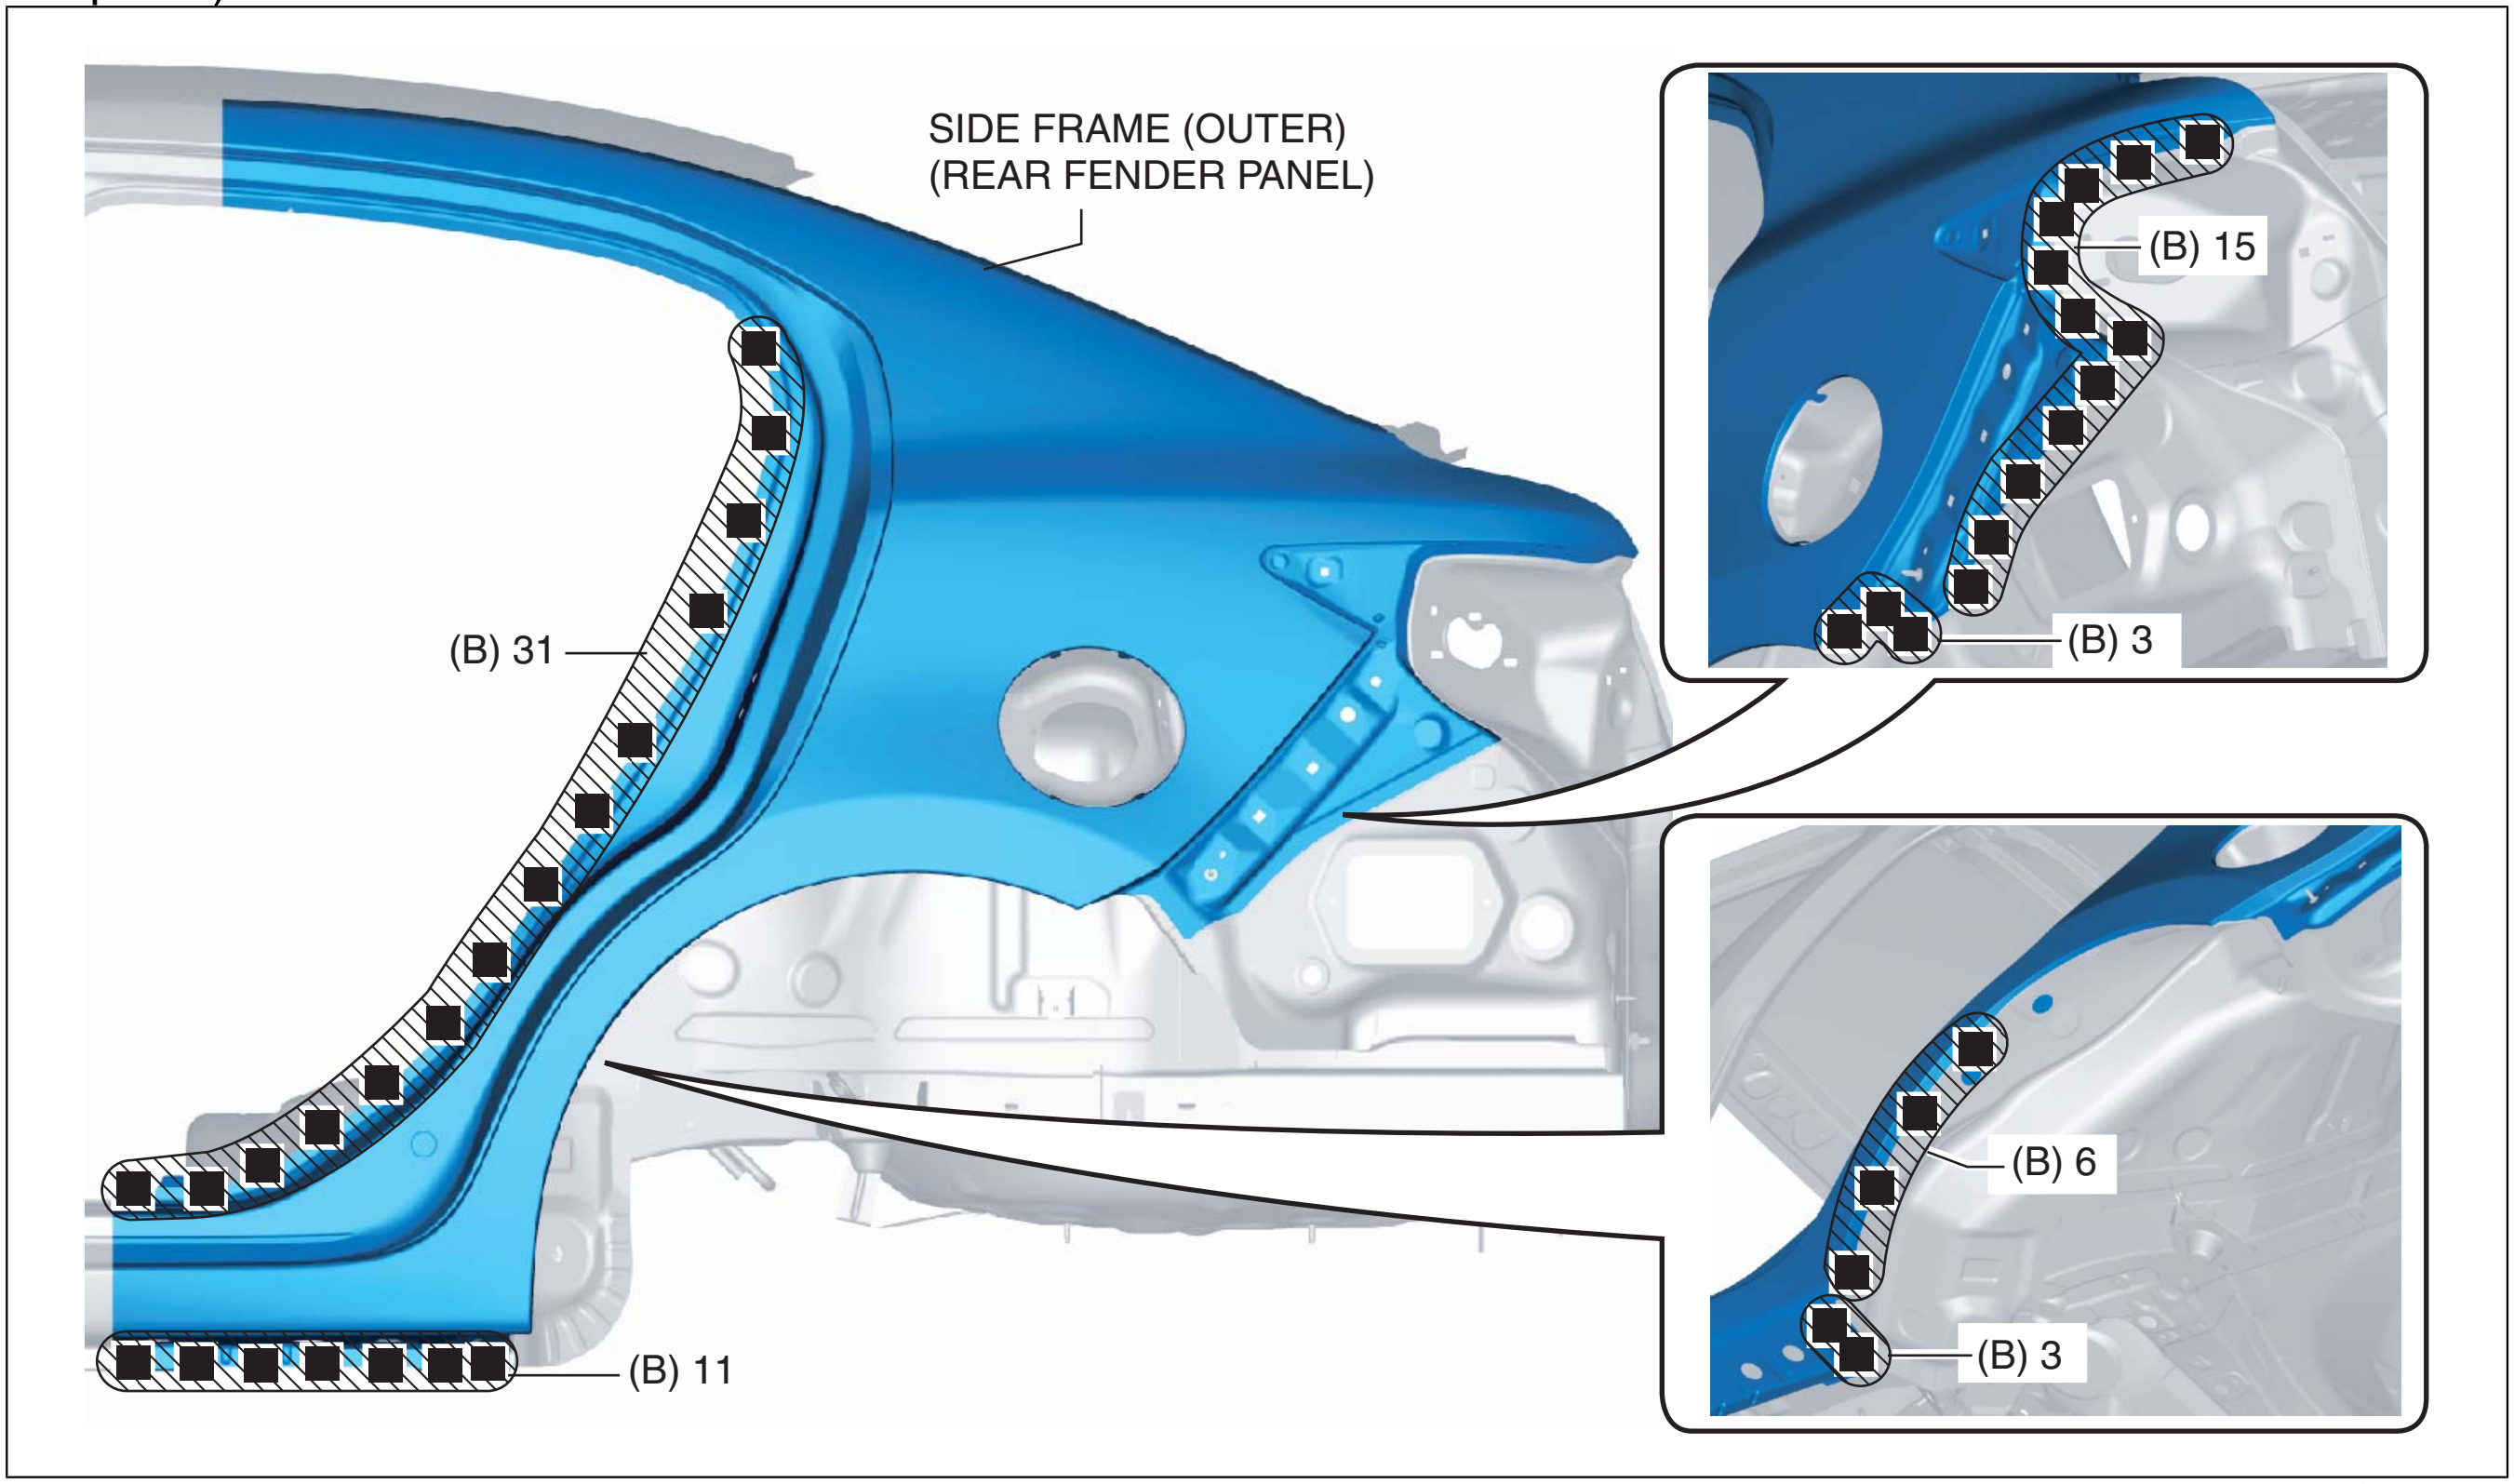

am2zzb00000602

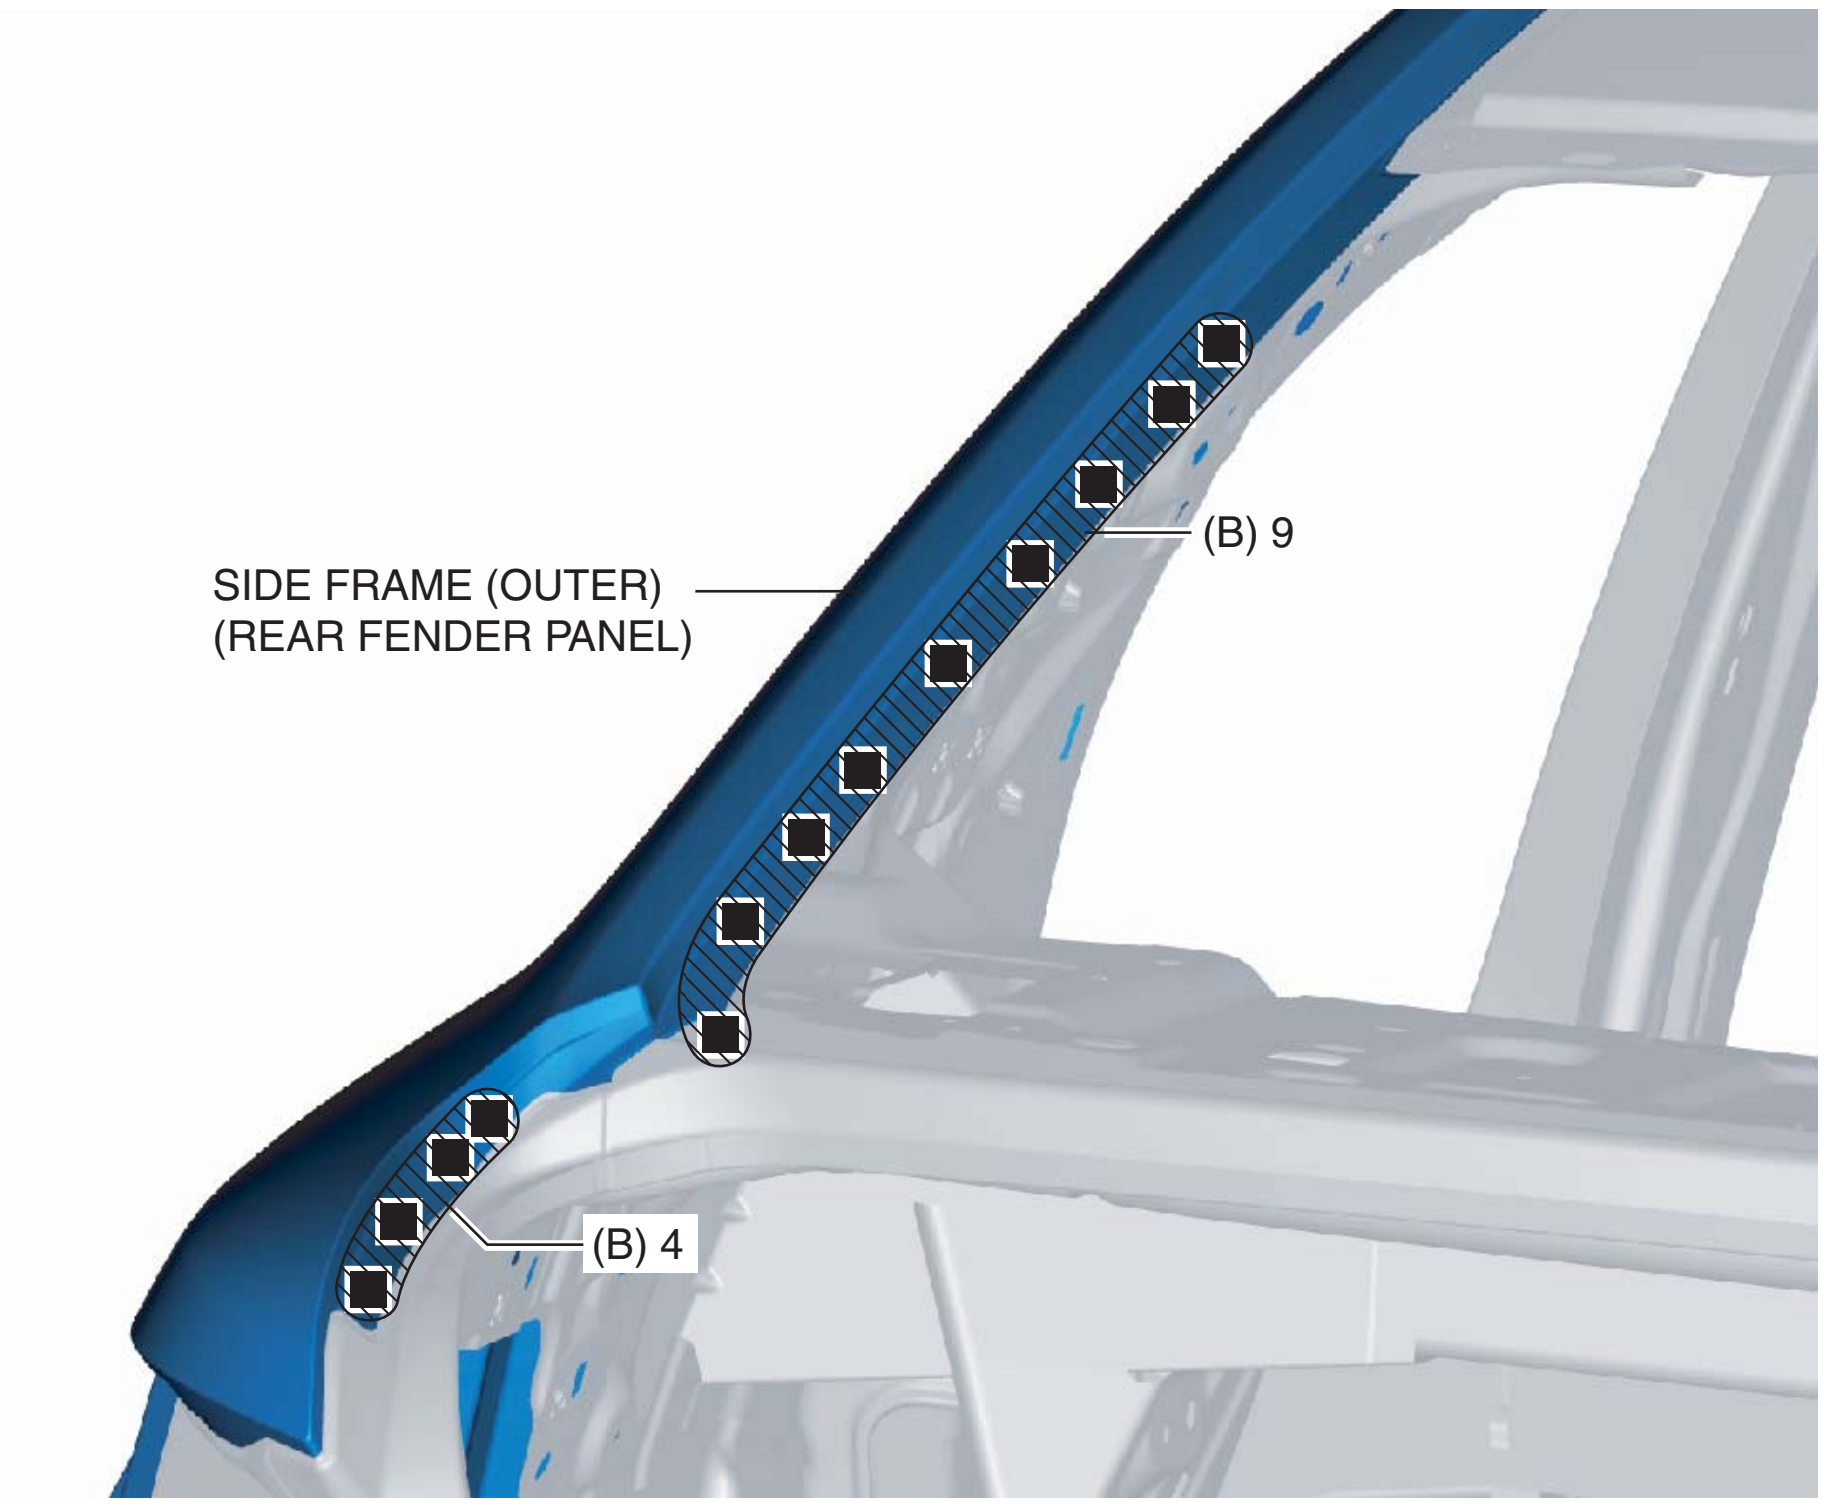

am2zzb00000603

5HB

1. When installing new parts, measure and adjust the body as necessary to conform with standard dimensions.
2. Drill holes for the plug welding before installing the new parts.
3. After temporarily installing new parts, make sure the related parts fit properly.
4. Before installing new parts, apply body sealer to the wheel arch line.

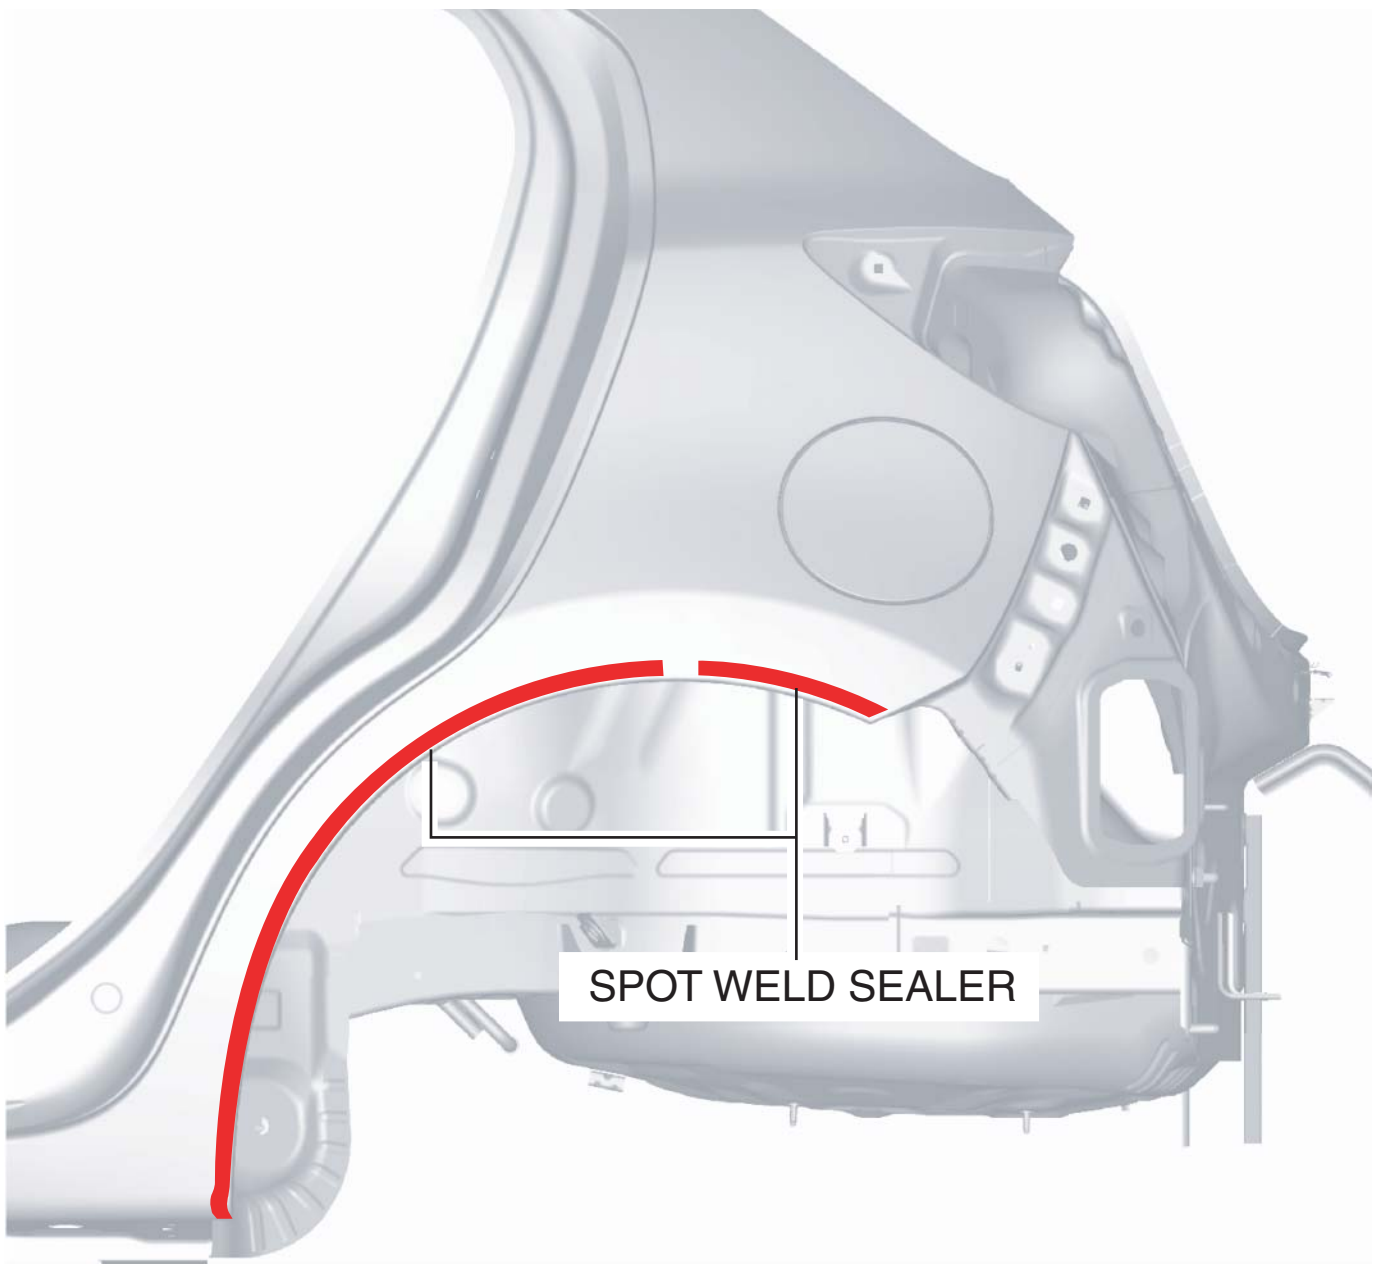

am2zzb00000523

5. Cut and join 2 locations indicated by (A) shown in the figure.
6. Plug weld the 81 locations indicated by (B) shown in the figure, then install the side frame (outer) (rear fender panel).

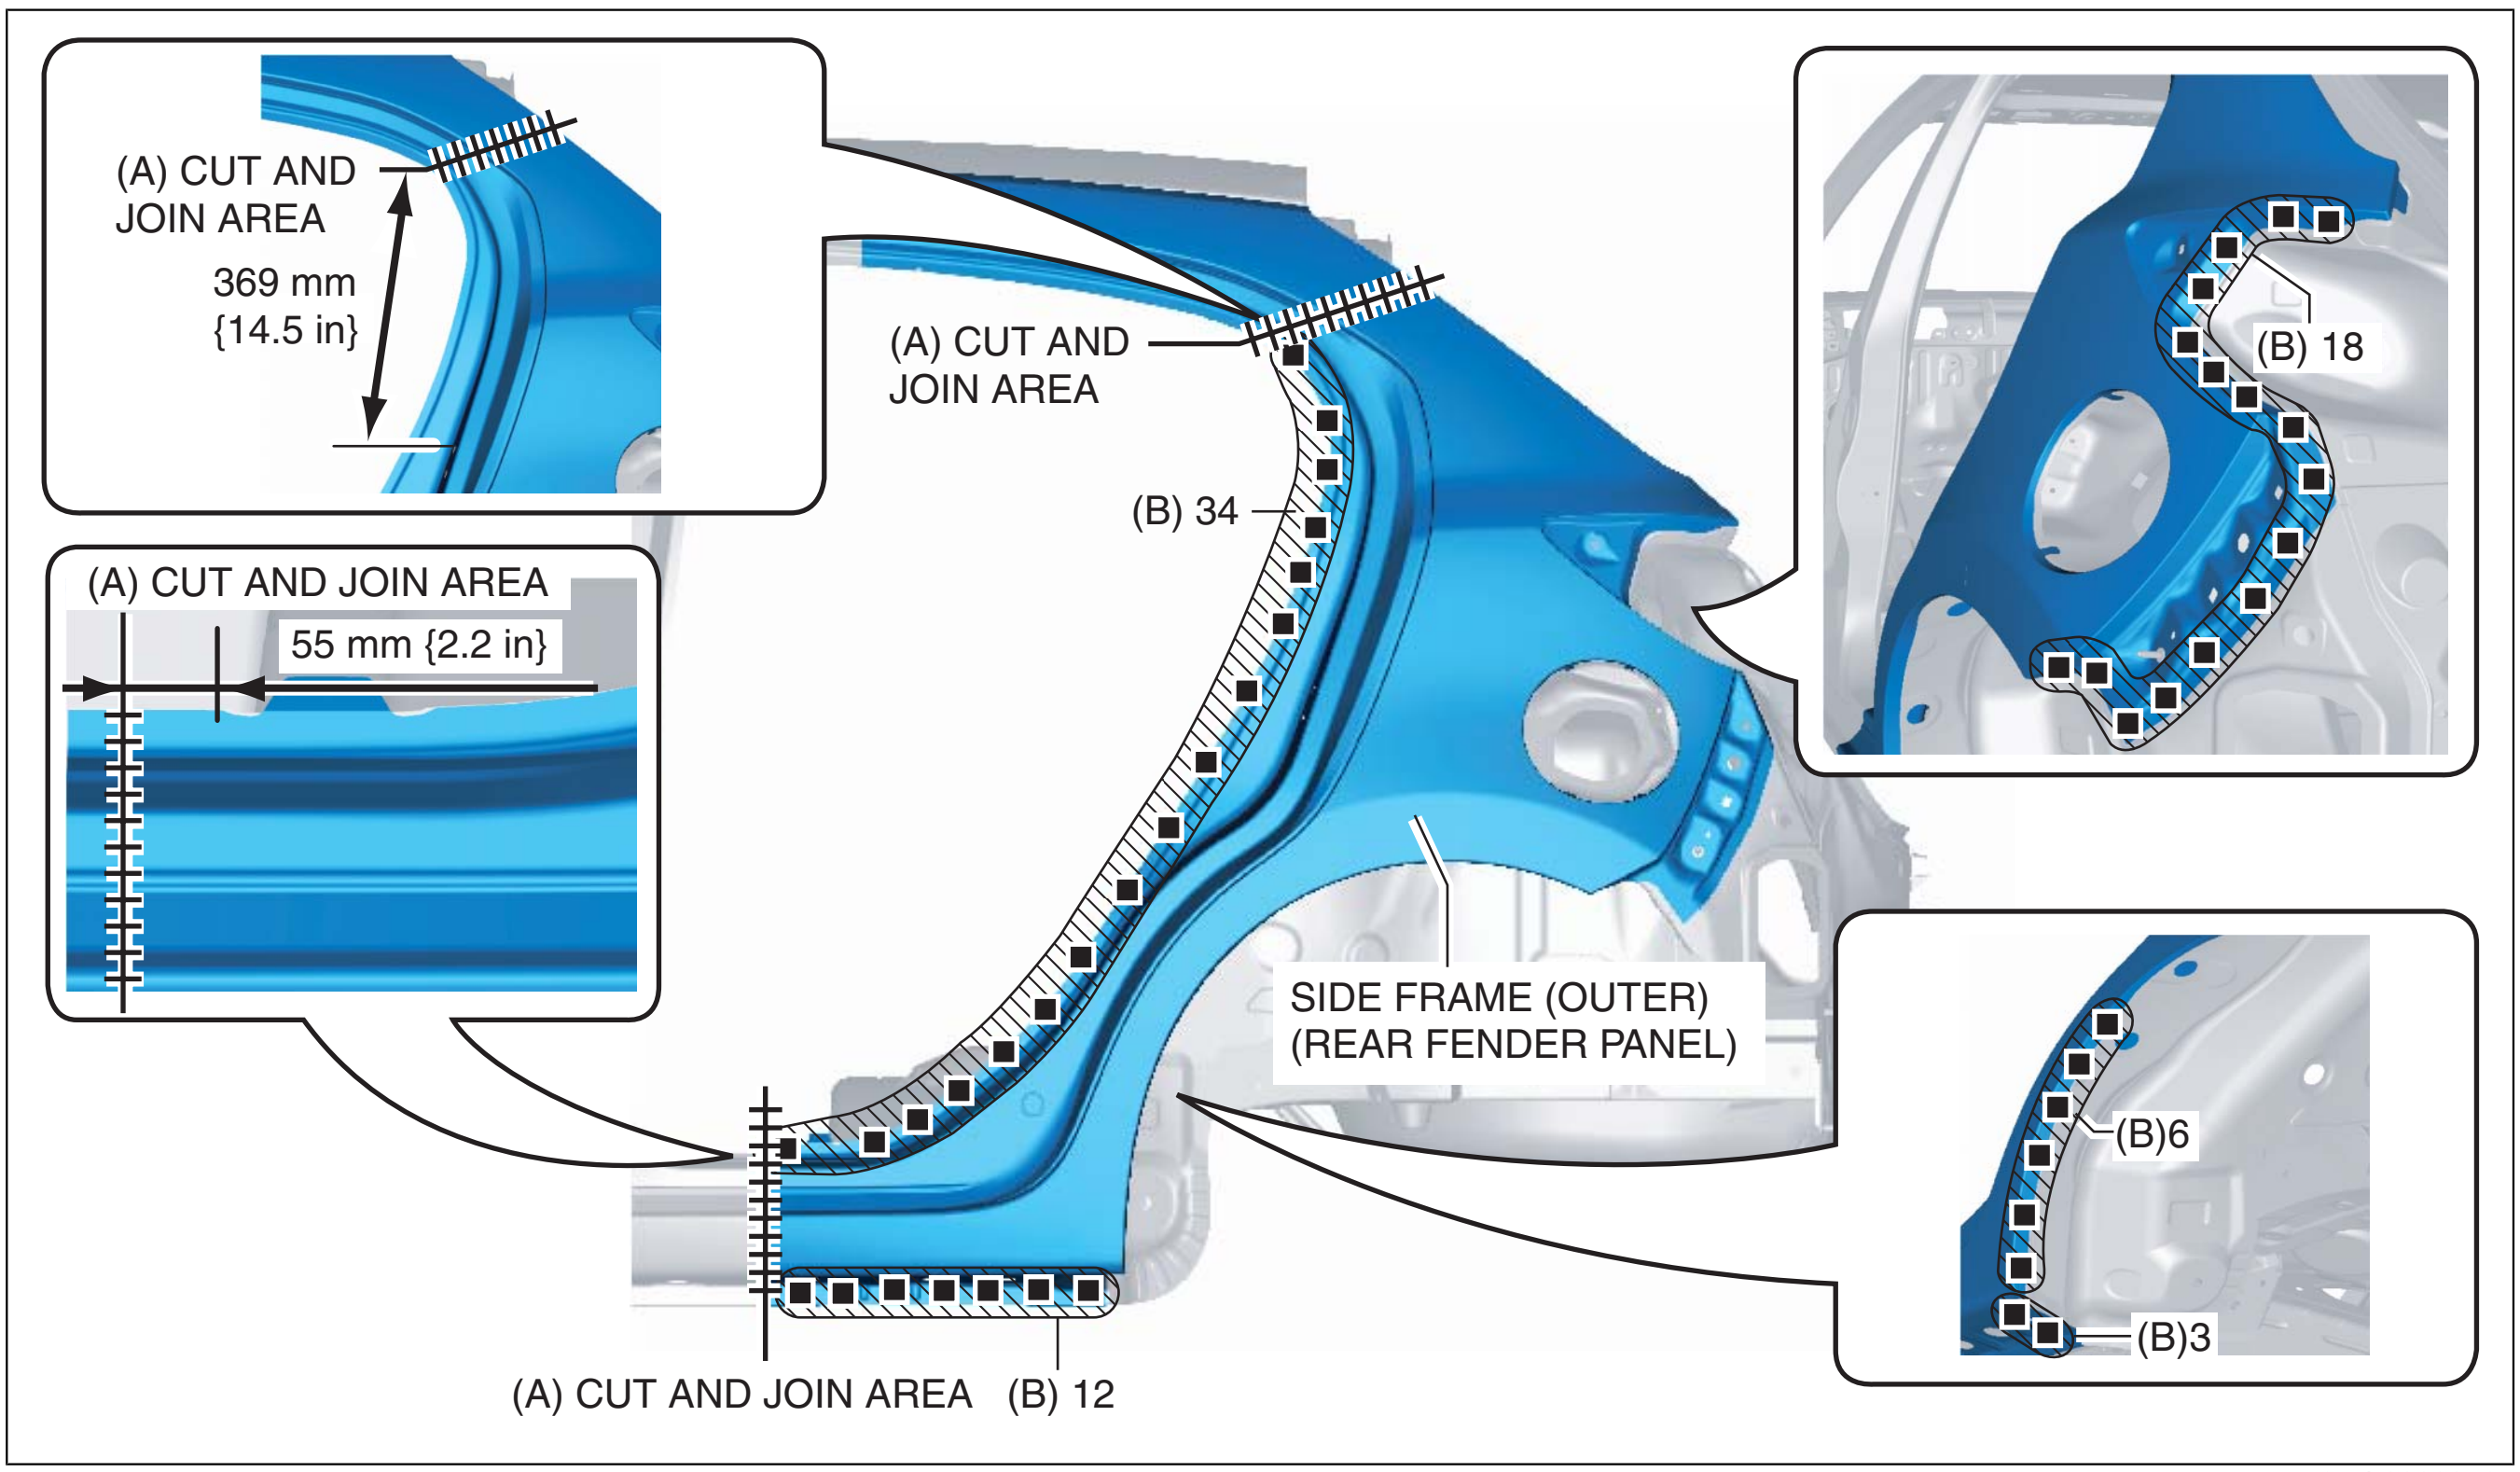

am2zzb00000524

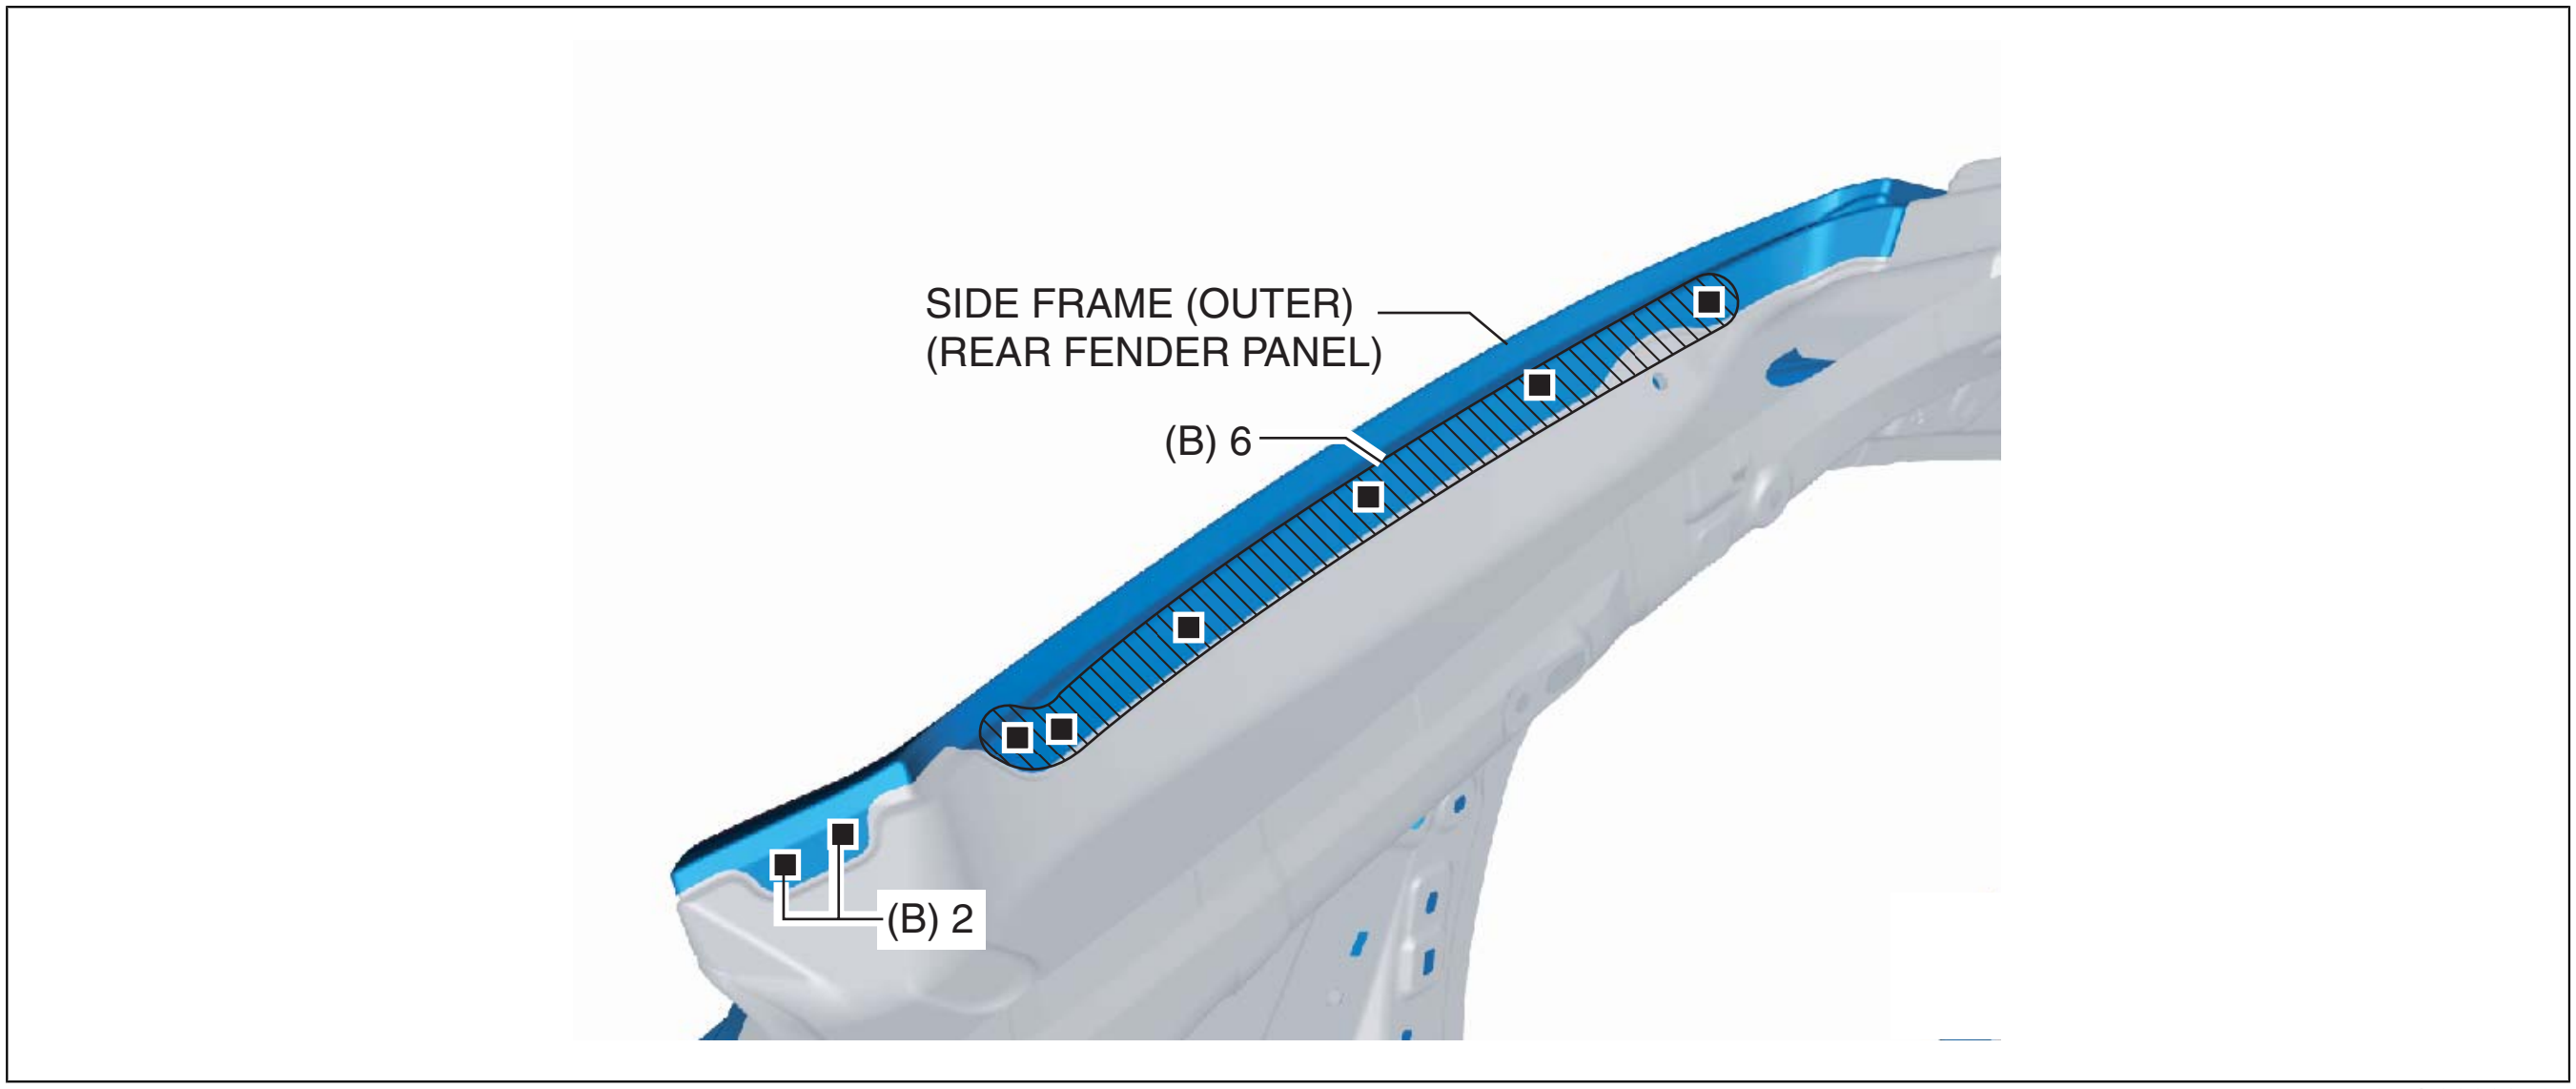

am2zzb00000525