REAR PILLAR (OUTER) REMOVAL [PANEL REPLACEMENT]

id098008747200


Symbol Marks

SYMBOL MARK	MEANING
●	SPOT WELDING
⎓	ROUGH CUT LOCATION

am2zzb00000558

Removal Procedure

1. Rough cut the 1 location indicated by (A) shown in the figure.
2. Drill the 17 locations indicated by (B) shown in the figure.

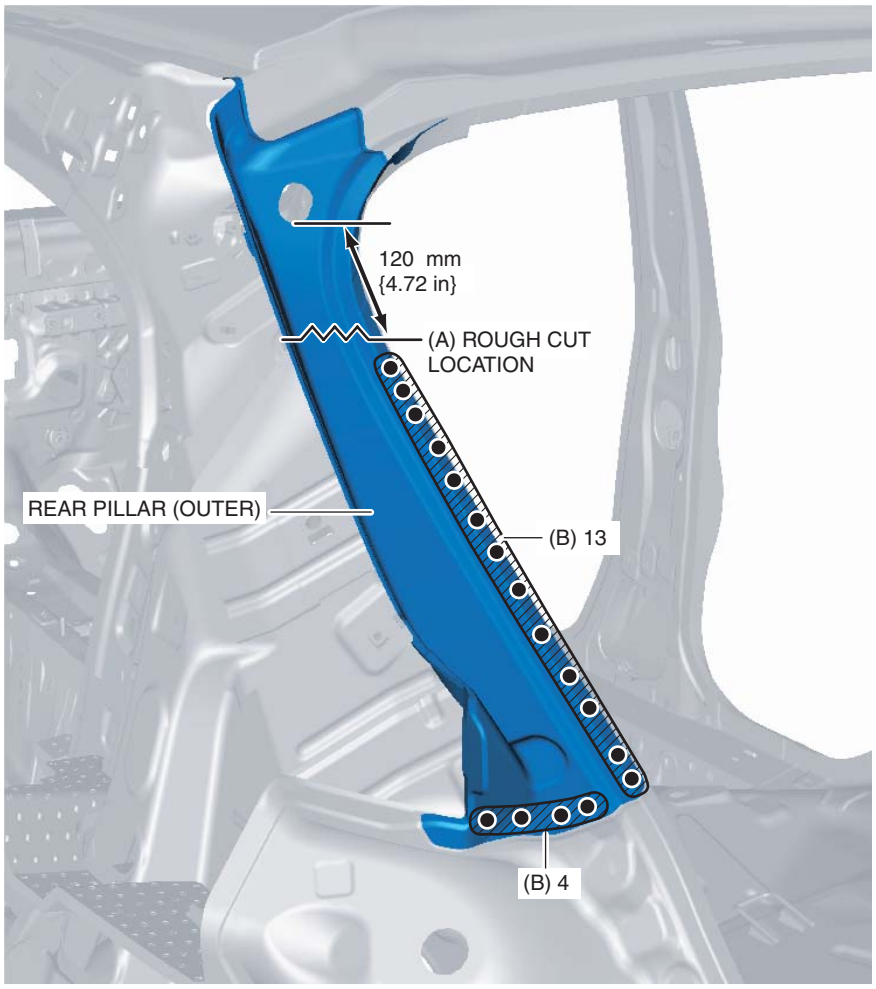

am2zzb00000559

3. Remove the rear pillar (outer).