FRONT FENDER JUNCTION REMOVAL [PANEL REPLACEMENT]

id098008828300

Symbol Marks

SYMBOL MARK	MEANING
●	SPOT WELDING


am2zzb00000458

Removal Procedure

1. Drill the 2 locations indicated shown in the figure.

Note

- When drilling the 2 locations indicated shown in the figure, do not drill a hole all the way through or there could be a problem when installing the new part.

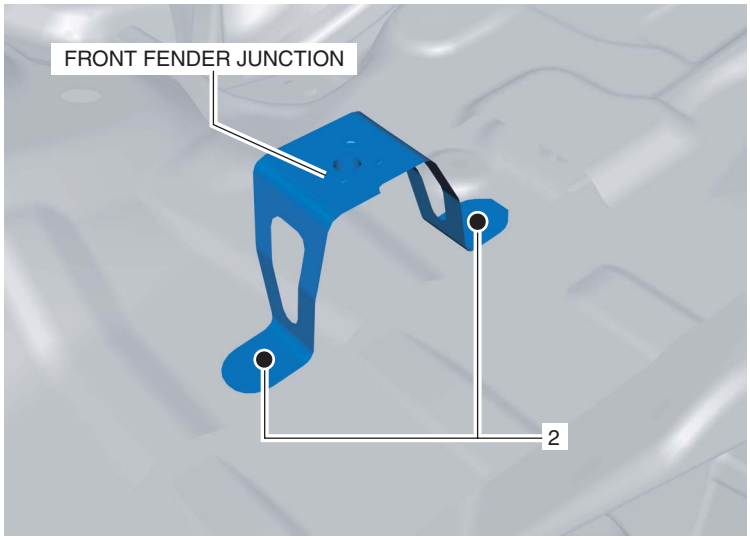

am2zzb00000459

2. Remove the front fender junction.