## BUMPER BRACKET REMOVAL [PANEL REPLACEMENT]

id098008999500

### Symbol Marks

| SYMBOL MARK | MEANING |
|---|---|
| ● | SPOT WELDING |
| ---------- | ROUGH CUT LOCATION |


am2zzb00000432

### Removal Procedure

1. Grind the 10 locations indicated by (A) shown in the figure.

**Caution**

- **When grinding 10 locations indicated by (A) shown in the figure and the front side frame is damaged, there is a possibility that attachment of a bracket may become difficulty. When grinding 10 locations indicated by (A) shown in the figure, the amount removed will affect the quality of the installation.**

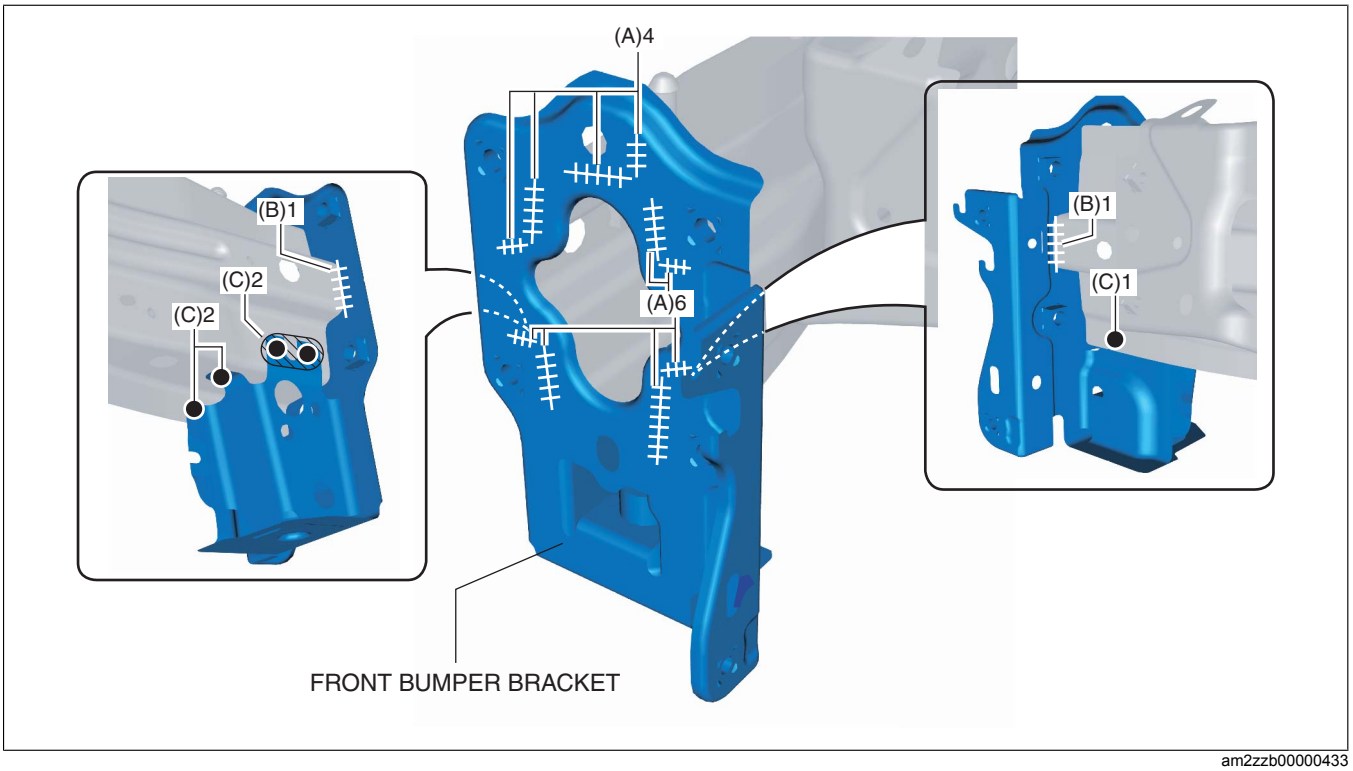


am2zzb00000433

2. Grind the 2 locations indicated by (B) shown in the figure.
3. Drill the 5 locations indicated by (C) shown in the figure.
4. Remove the front bumper bracket.