

REAR BODY STRAIGHT-LINE DIMENSIONS [DIMENSIONS]

id098010990800

4SD

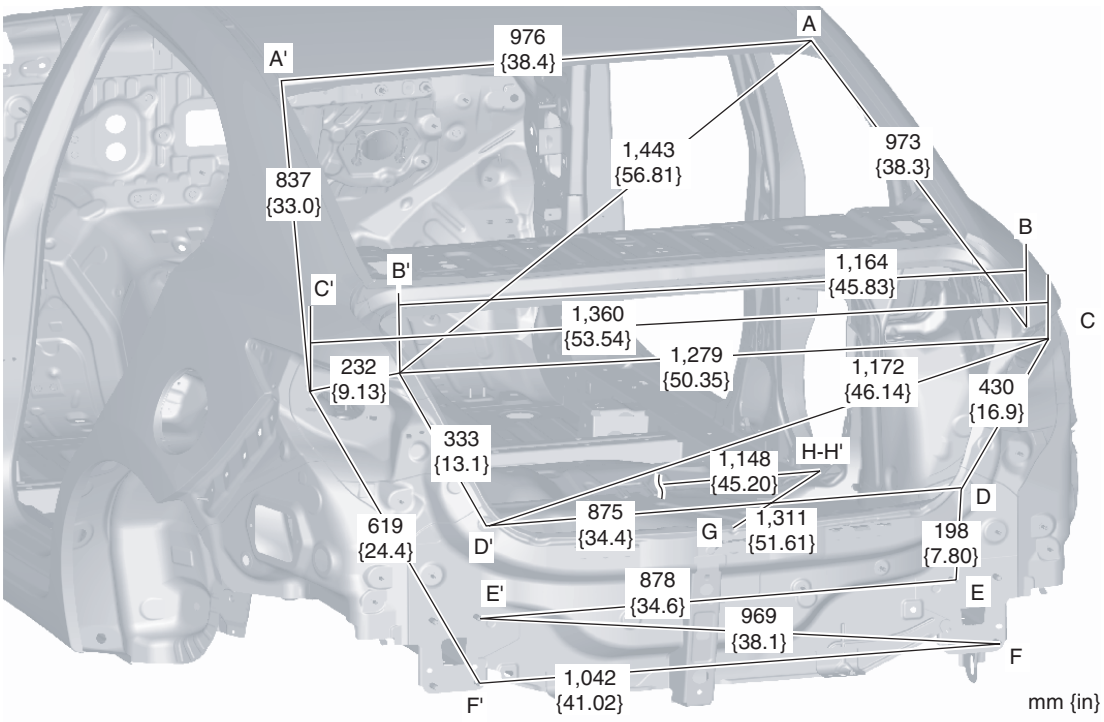

am2zzb00000676

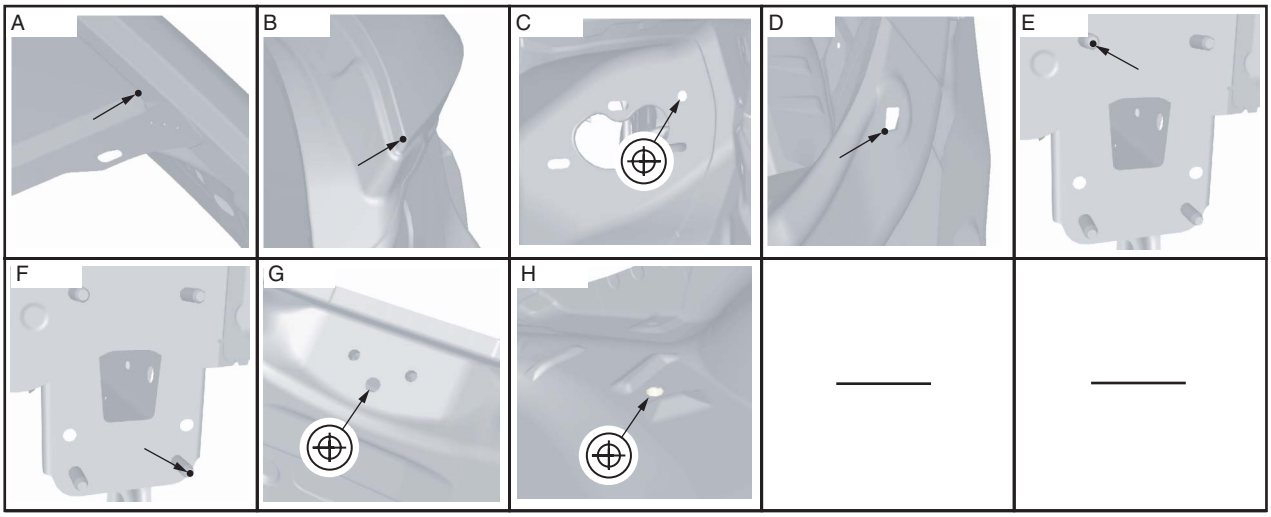


am2zzb00000677


Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
A	Roof panel projection location	—
B	Cabin side frame (outer) (rear fender panel) projection location	—
C	Corner plate datum hole	φ10 {0.39}
D	Rear bumper grommet installation square hole	9 X 9 {0.4 X 0.4}
E	Rear bumper reinforcement installation bolt	M10

Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
F	Rear bumper reinforcement installation bolt	M10
G	Trunk lid striker installation hole	φ10 {0.39}
H	Rear seat belt anchor installation bolt	φ13 {0.51}

5HB

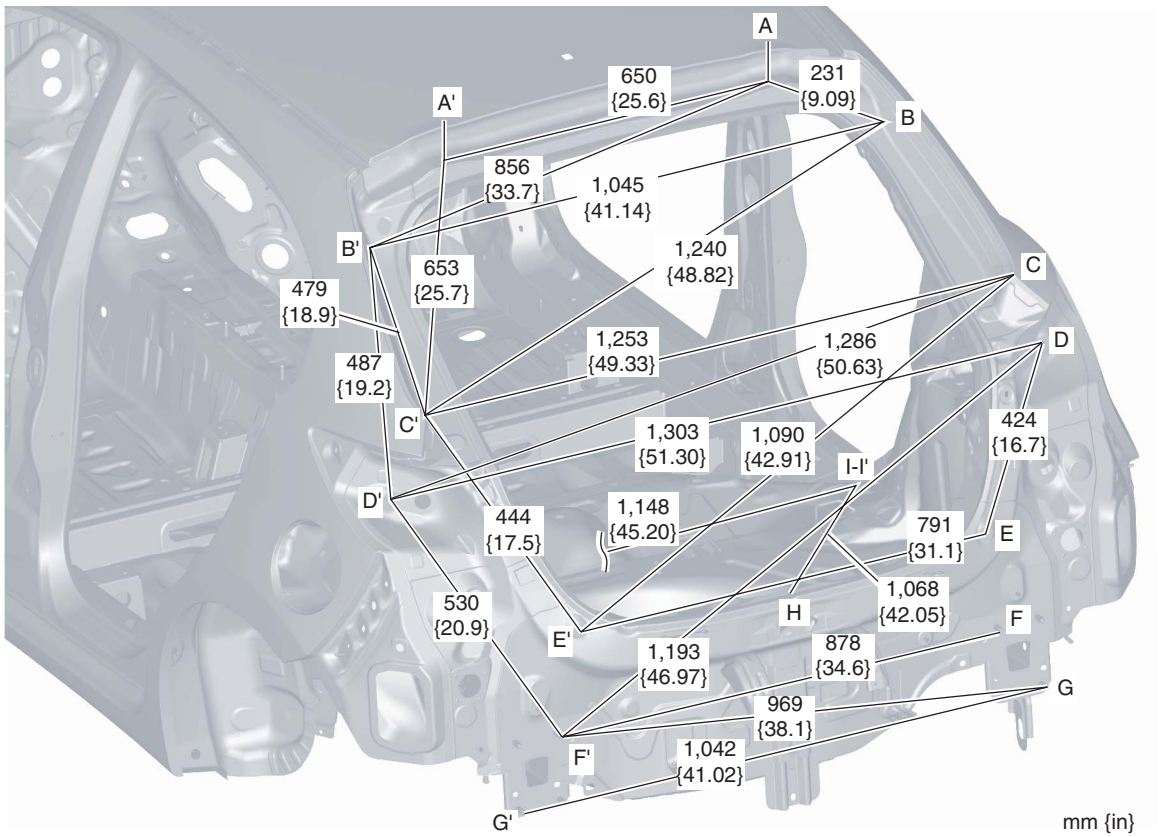

am2zzb00000703

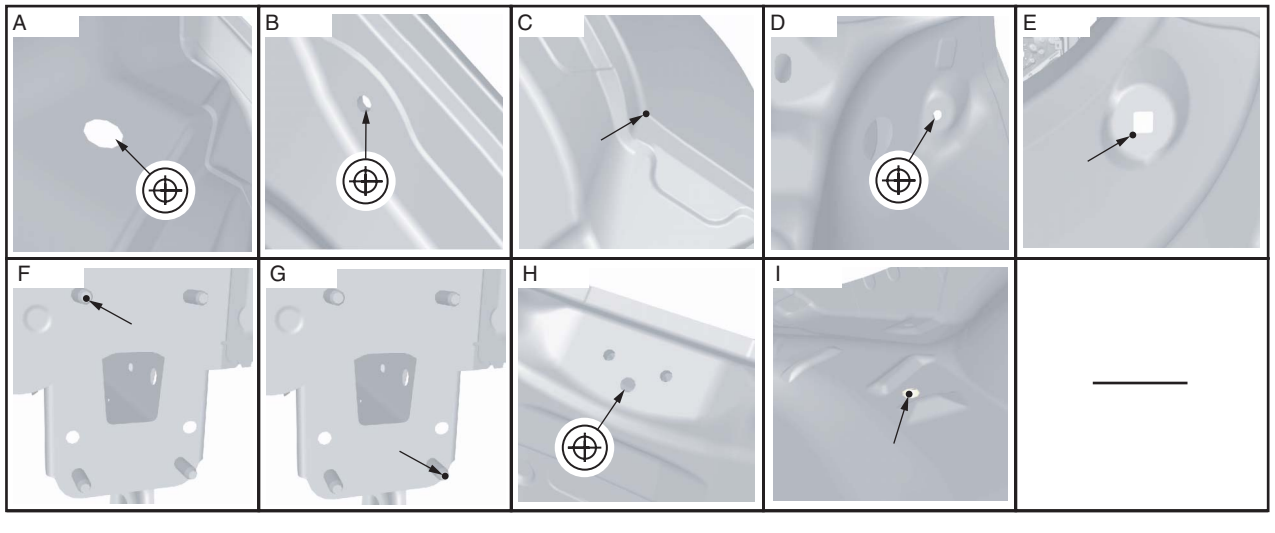

adejjb00000339

Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
A	Liftgate hinge installation hole	φ14 {0.55}
B	Liftgate stay damper installation nut	M8
C	Cabin side frame (outer) (rear fender panel) projection location	—
D	Corner plate datum hole	φ8 {0.3}
E	Rear bumper grommet installation square hole	9 X 9 {0.4 X 0.4}

Point symbol	Designation	Hole diameter or bolt or nut size (mm {in})
F	Rear bumper reinforcement installation bolt	M10
G	Rear bumper reinforcement installation bolt	M10
H	Liftgate striker installation hole	φ10 {0.39}
I	Rear seat belt anchor installation bolt	φ13 {0.51}