
FRONT FENDER STAY PAINT PROCEDURE [PAINT PROCEDURE]

id0980c3888800

Caution


- **For the front fender stay, if paint gets on the shaded area shown in the figure, it could cause a poor ground and the Power train Control Module (PCM) may not function normally causing a malfunction such as the engine stalls or cannot be restarted.**
  Paint the front fender stay according to the (See Paint Procedure For Front Fender Stay.)
  In addition, always use a ground bolt for the bolt used in assembling the shaded area.

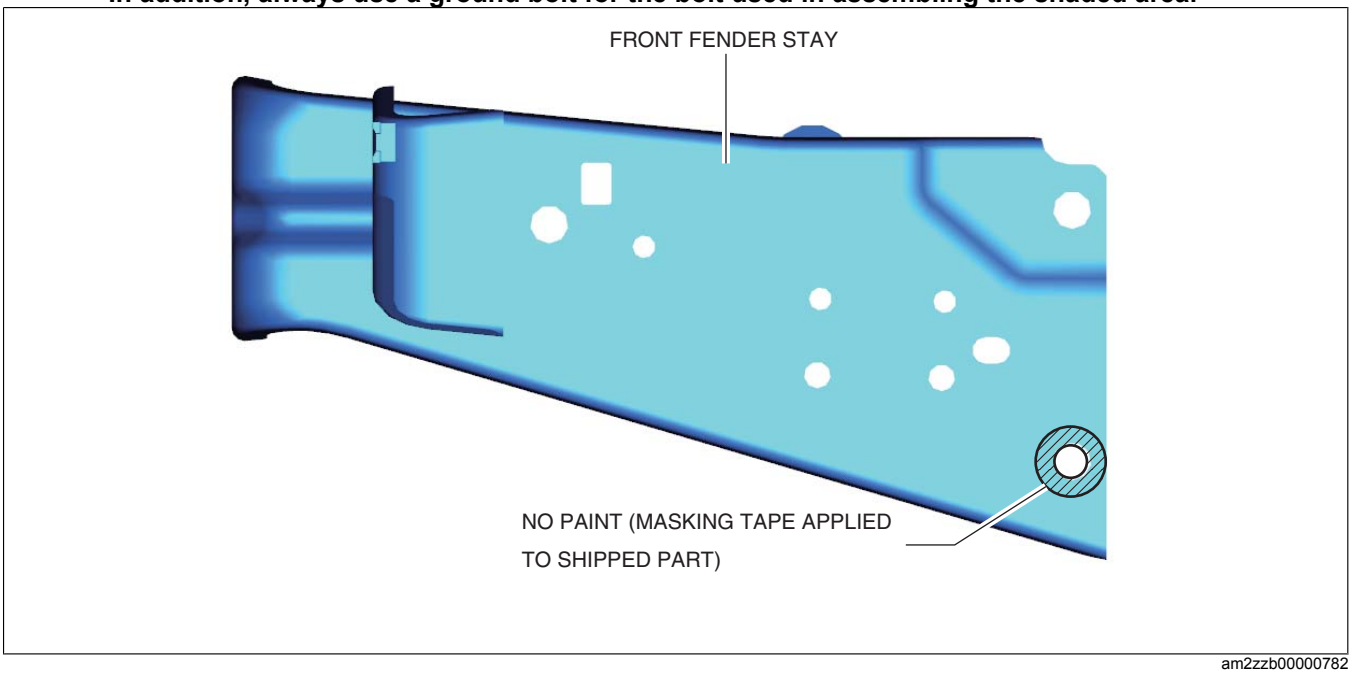

am2zzb00000782

Paint Procedure For Front Fender Stay.
Paint procedure for replaced front fender stay. (LH/RH)

1. Paint the front fender stay with the masking tape left applied.

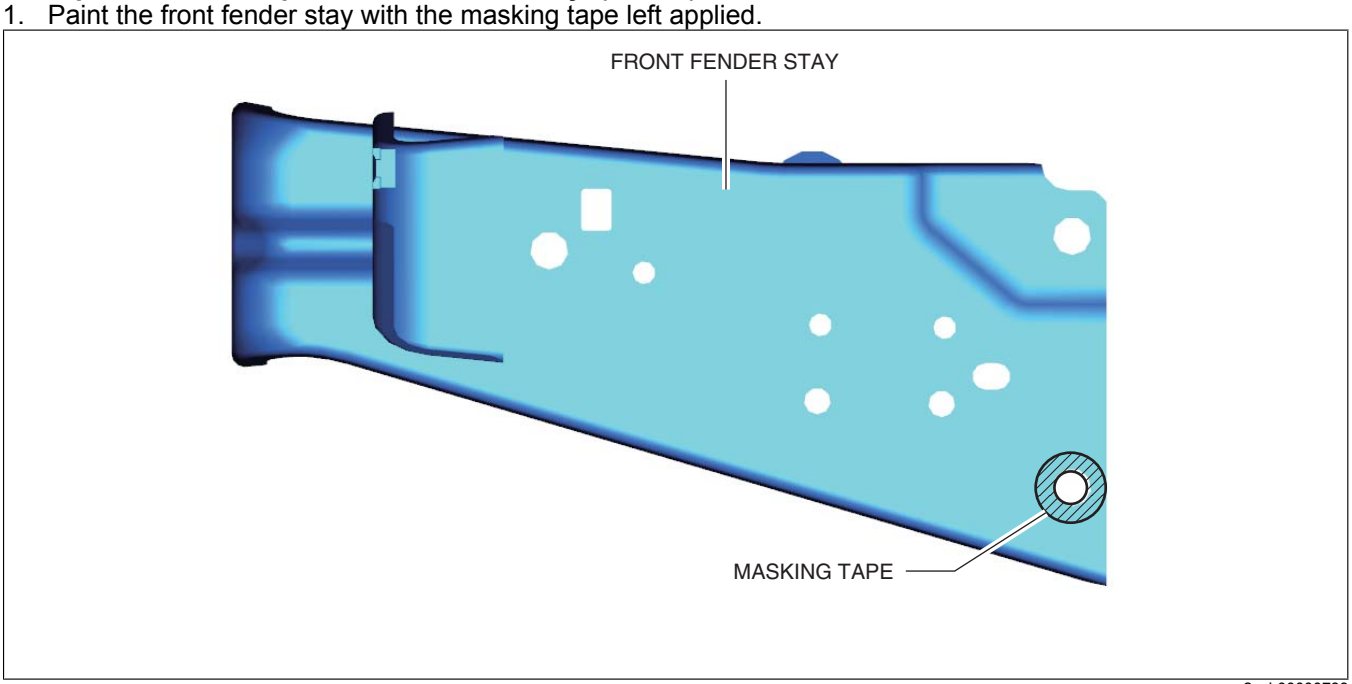


am2zzb00000783

2. After the paint is completely dried, peel off the masking tape.
3. Tighten the ground bolt and the bolts shown in the figure to the specified torque, and install the front fender stay.

Note


- Apply touch-up paint to the exposed base material area on the seating surface after tightening the ground bolt to prevent rust.

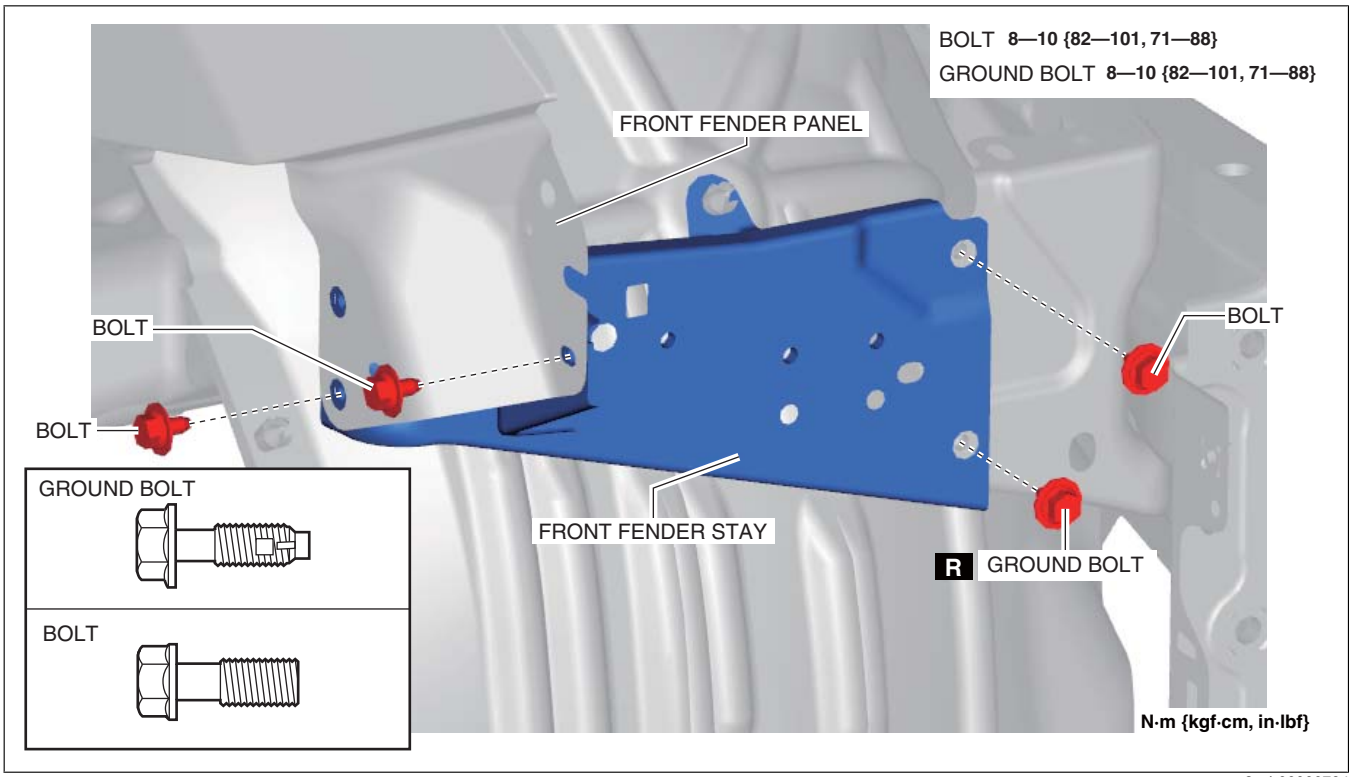

am2zzb00000784

Paint procedure for front fender stay repair (reused). (LH/RH)

1. Apply the masking tape to area A shown in the figure and paint the front fender stay.

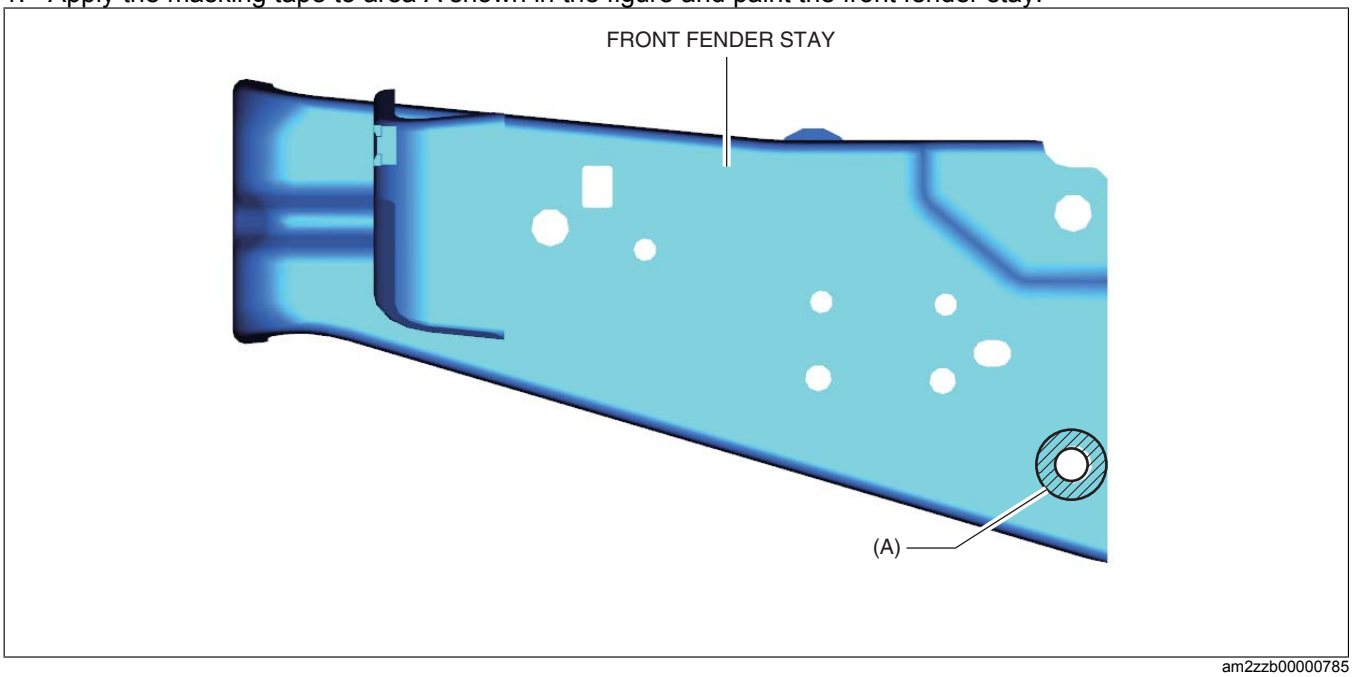


am2zzb00000785

2. After the paint is completely dried, peel off the masking tape.
3. Tighten the ground bolt and the bolts shown in the figure to the specified torque, and install the front fender stay.

Note

- Apply touch-up paint to the exposed base material area on the seating surface after tightening the ground bolt to prevent rust.

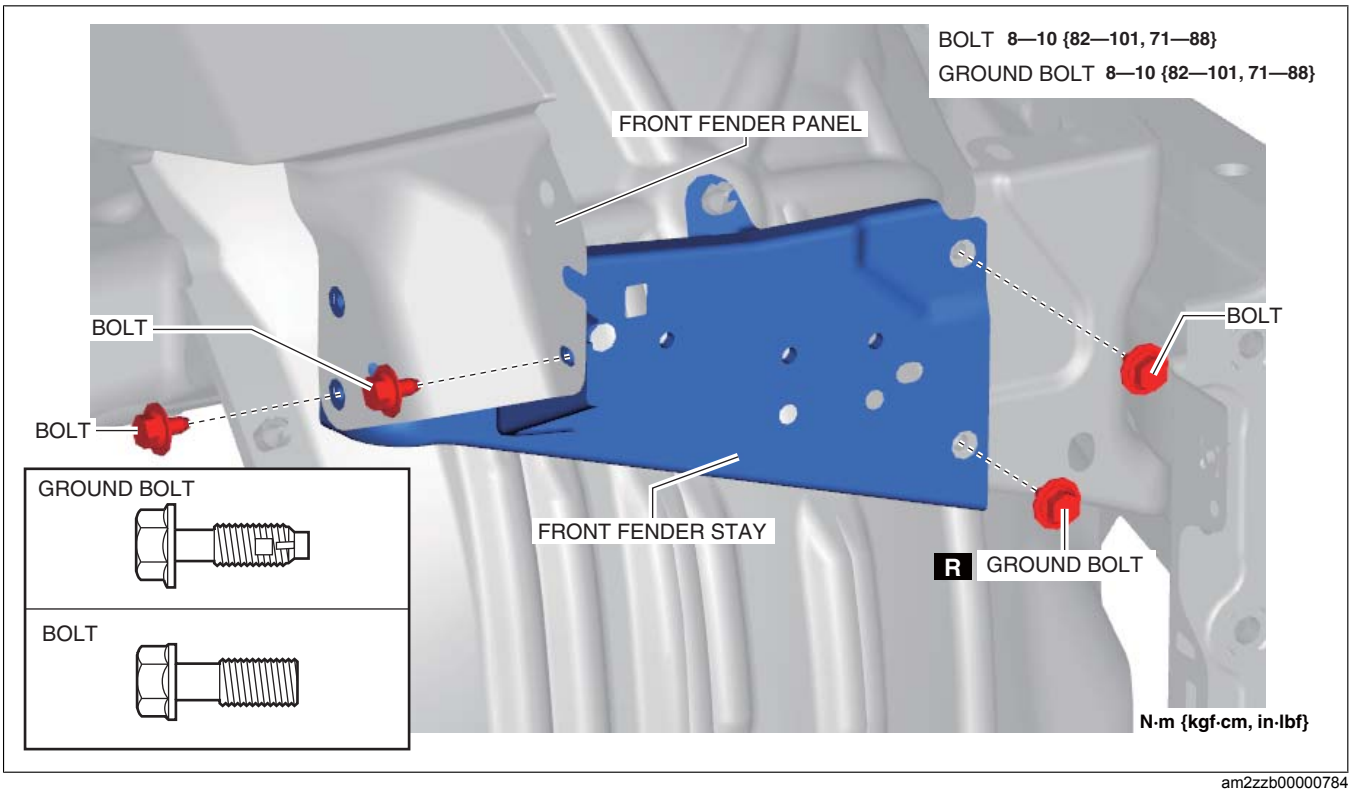

am2zzb00000784