

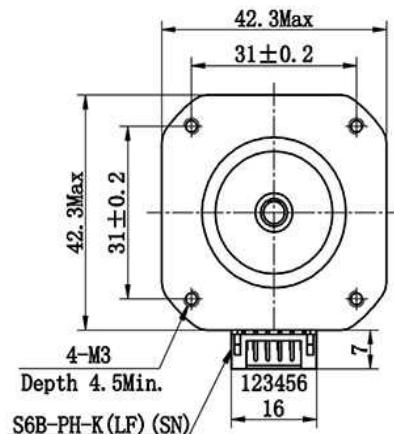


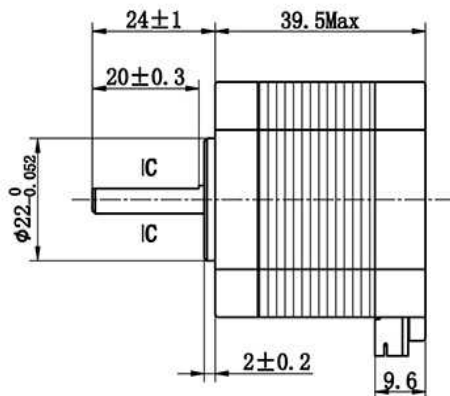


|   |   |   |   |   |   |
|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 |
| A | C | B | D |   |   |

C-C(2:1)



Wiring Diagram



Exciting Sequence vs. Direction of Rotation

| STEP | A | B | C | D |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|---|---|---|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | + | + | - | - | <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <div style="width: 10px; height: 10px; border: 1px solid black; background-color: black; margin: 0 auto;"></div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);">CW</div> </div> <div style="margin-left: 10px;"> <div style="width: 10px; height: 10px; border: 1px solid black; background-color: black; margin: 0 auto;"></div> <div style="writing-mode: vertical-rl;">CCW</div> </div> </div> |
| 2    | - | + | + | - |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3    | - | - | + | + |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 4    | + | - | - | + |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Clockwise View  
From Mounting Side

# Electrical Characteristics

|                           |                         |
|---------------------------|-------------------------|
| 1. Number of Phase        | 2                       |
| 2. Step Angle             | 1.8°                    |
| 3. Rated Voltage          | 3.3V DC                 |
| 4. Rated Current          | 1.5A                    |
| 5. Holding Torque         | 400mN.m Min(2 Phases)   |
| 6. Phase Resistance       | 2.2Ω ±10%(20° C)        |
| 7. Phase Inductance       | 3.8mH ±20%(1kHz 1V rms) |
| 8. Motor Inertia          | 57g.cm <sup>2</sup>     |
| 9. Motor Weight           | 280g Ref.               |
| 10. Insulation Resistance | 100MΩ Min. (DC 500V)    |
| 11. Insulation Class      | B(130° C)               |

|                         |  |  |  |                                                                                                                                                        |  |  |  |
|-------------------------|--|--|--|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
|                         |  |  |  |  <b>东莞市摩酷机电有限公司</b><br>DONGGUAN MOTION CONTROL TECHNOLOGY CO., LTD. |  |  |  |
|                         |  |  |  |                                                                                                                                                        |  |  |  |
| REV.                    |  |  |  | 名称<br>TITLE                                                                                                                                            |  |  |  |
| 版本记录 REVISION RECORD    |  |  |  | 电机规格书<br>MOTOR SPECIFICATION                                                                                                                           |  |  |  |
|                         |  |  |  | 图号<br>DWG No.                                                                                                                                          |  |  |  |
| 设计<br>DESIGN            |  |  |  | 42HD4027-01                                                                                                                                            |  |  |  |
| 审核<br>CHECK             |  |  |  | 第一角画法<br>FIRST ANGLE METHOD                                                                                                                            |  |  |  |
| 批准<br>APPROVE           |  |  |  | 单位Unit:mm 比例Scale 1:1                                                                                                                                  |  |  |  |
| 未注公差Tolerance sheet     |  |  |  | 页Sheet 1 of 1 版本Version:A                                                                                                                              |  |  |  |
| X ±0.3 X' ±1'           |  |  |  |                                                                                                                                                        |  |  |  |
| X.X ±0.1 X.X' ±0.1'     |  |  |  |                                                                                                                                                        |  |  |  |
| X.XX ±0.01 X.XX' ±0.01' |  |  |  |                                                                                                                                                        |  |  |  |
| X.XXX ±0.002            |  |  |  |                                                                                                                                                        |  |  |  |