



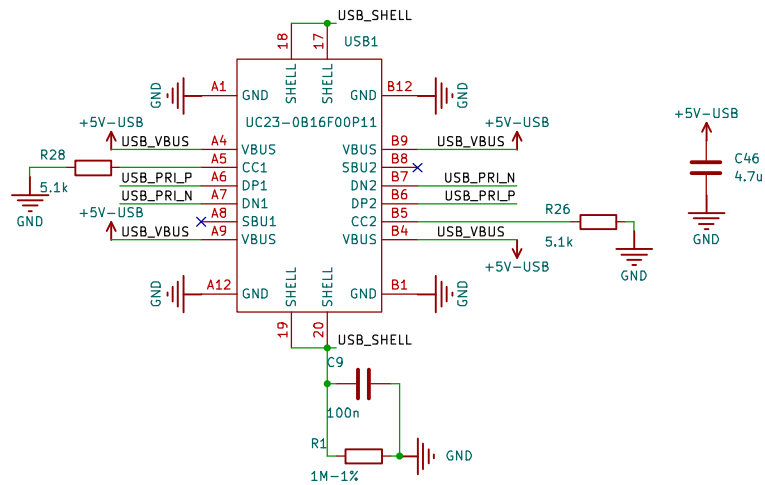

FID1

Fiducial

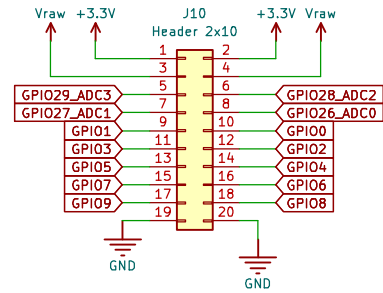

FID2

Fiducial



FID3

Fiducial



H1
MountingHole



H2
MountingHole




H3
MountingHole



H4
MountingHole



LOGO1
OSHW_Logo

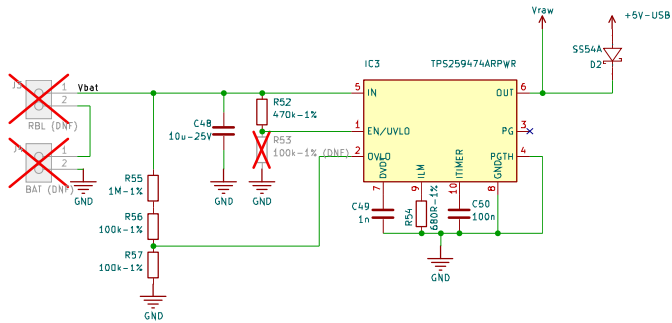

$ILIM = 333\Omega / R54 = 4.9\text{ A}$ (fast trip 9.8 A);
 ITIMER 100n = 84 ms;
 $dV/dt\ C49\ I_n = 2\text{ V/ms}$; 8.4 V in -4 ms
 UVLO: R52 470k pull-up only $\Rightarrow$ aFuse internal UVP, on 2.53 V / off 2.42 V
 For a 2S pack RL R53 = 100k (DNF by default): on 6.84 V / off 6.21 V;
 OVLO: (R55+R56)/R57 = 1.1M/100k $\Rightarrow$ trips at 14.4 V typ (13.8-15.1 V worst case), re-enables below -13.1 V;
 Survives 15 V downstream: TP563070 VIN 16 V ROC / 20 V abs max, C10-C15 25 V, D2 40 V, Input sides IC3 23 V ROC, C48 25 V.

