

designers:
sirilpanda

CAN source

Sheet: /

File: stm32-tutorial-project.kicad_sch

Title:



Size: A4

Date: 2025-03-19

KiCad E.D.A. 8.0.9

Rev: A

Id: 1/2

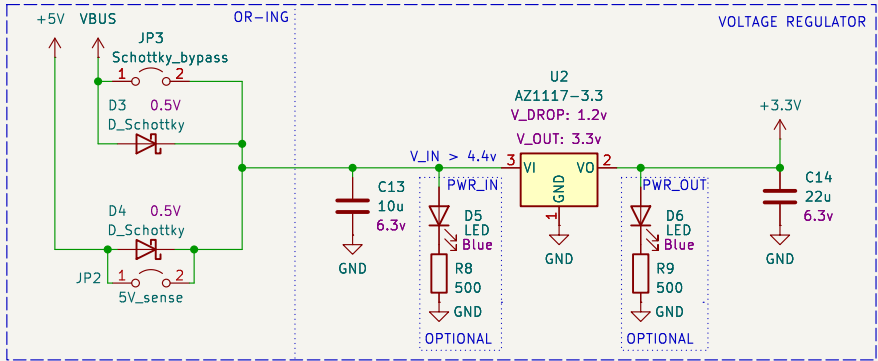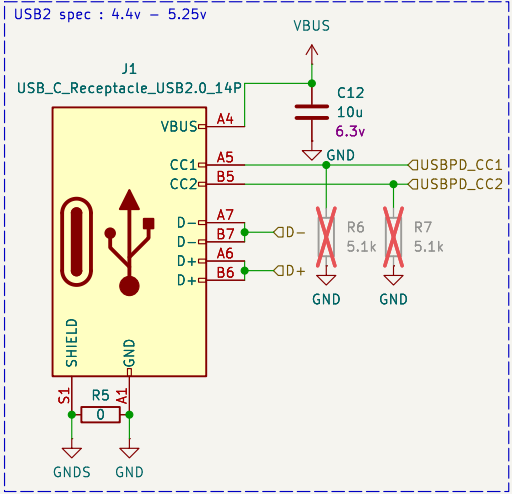

or-ing allows both the swd header and usb to be used at the same time, since neither will back feed into eachother. although a jumper has been added since some swd programmers use this voltage rail as a sense pin

CAN source		
Sheet: /power/		
File: power.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.9		Id: 2/2