DOPE component ablations: primary 372 images (WOOD 125)

PLASTIC: 128 images / 985 refs
PCK@10 px

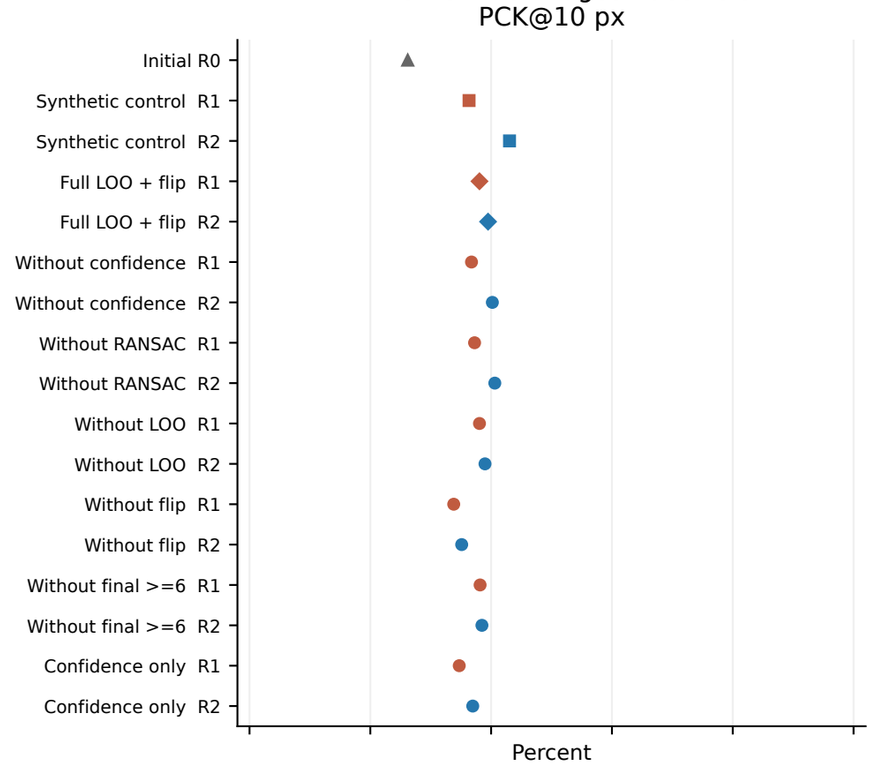

PLASTIC: 128 images / 985 refs
Reference coverage

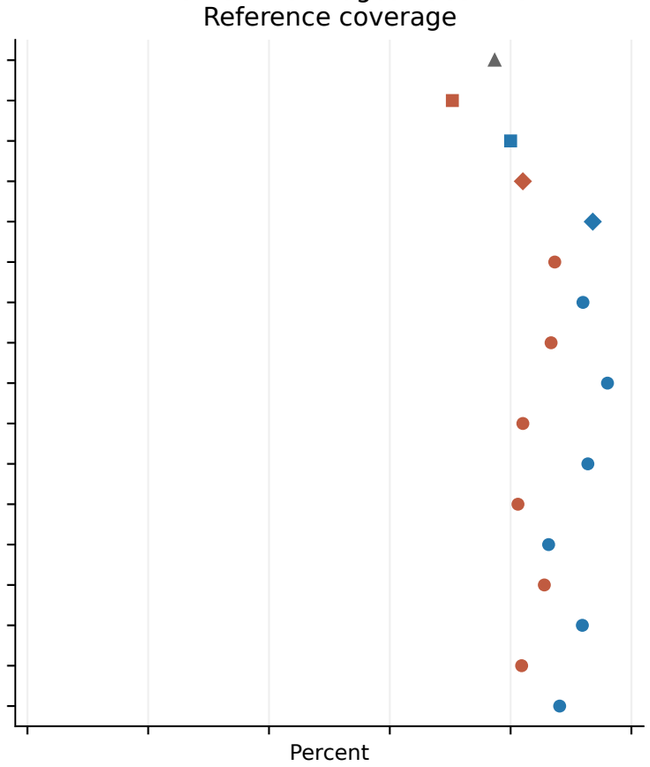

PLASTIC: 128 images / 985 refs
Conditional precision@10 px

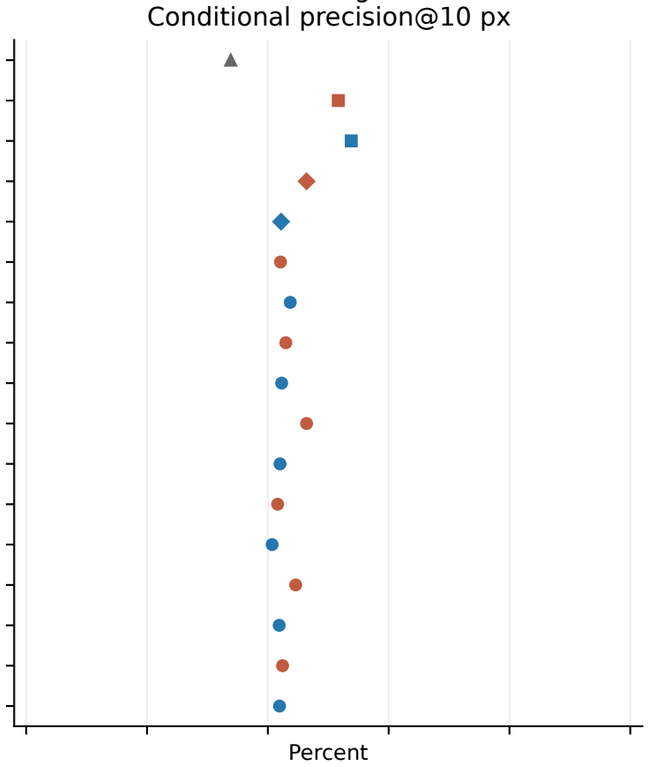

WOOD: 125 images / 963 refs
PCK@10 px

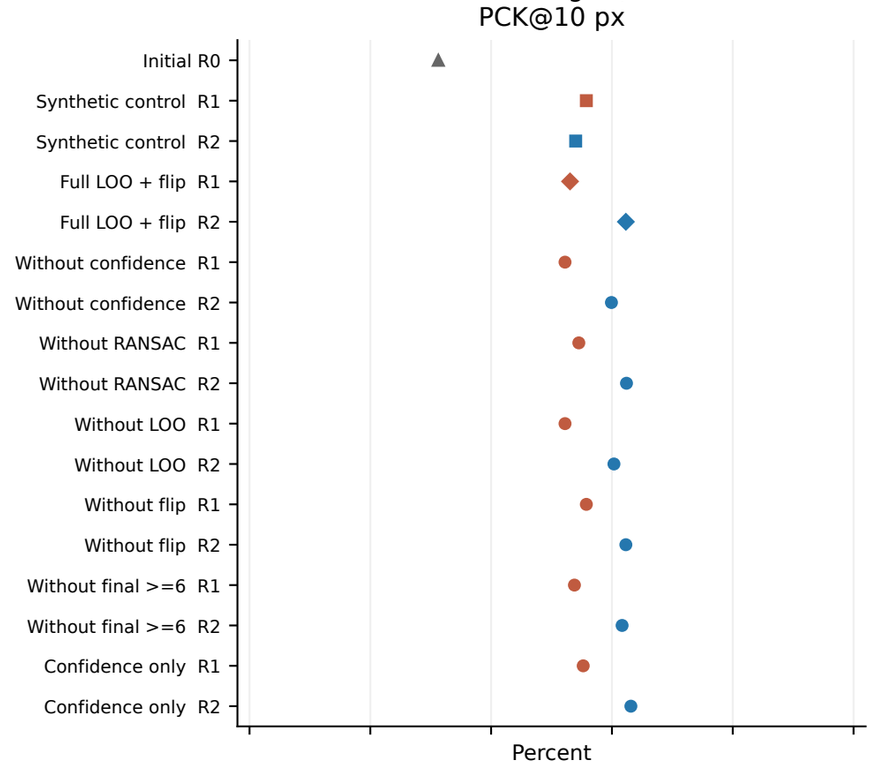

WOOD: 125 images / 963 refs
Reference coverage

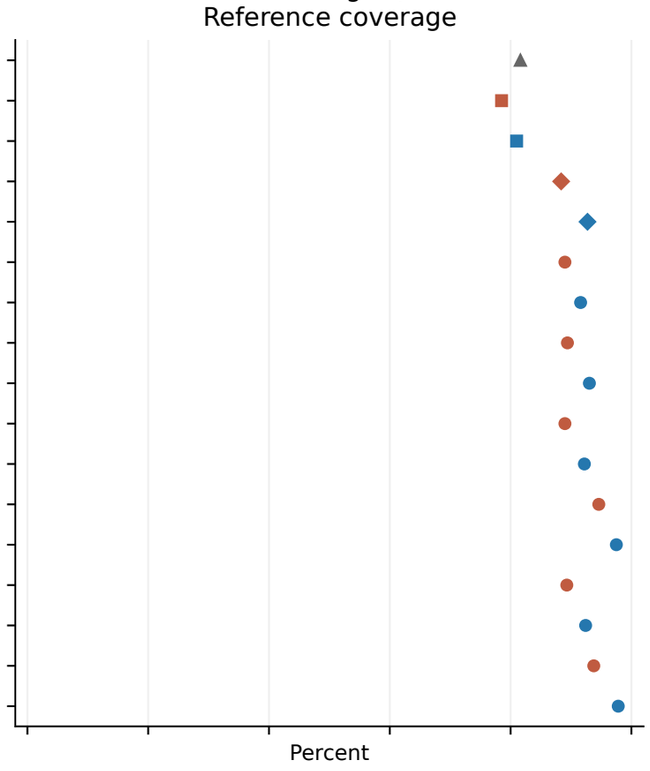

WOOD: 125 images / 963 refs
Conditional precision@10 px

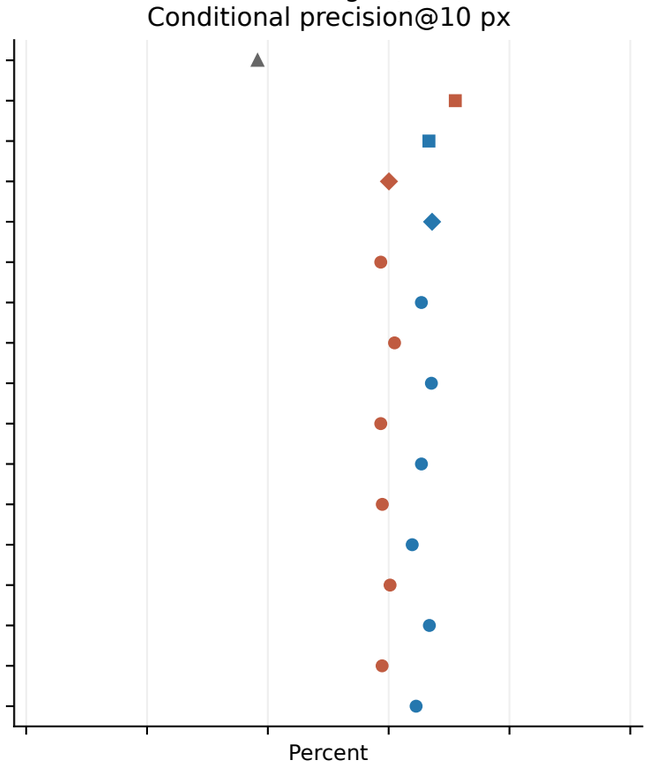

GREEN: 119 images / 943 refs
PCK@10 px

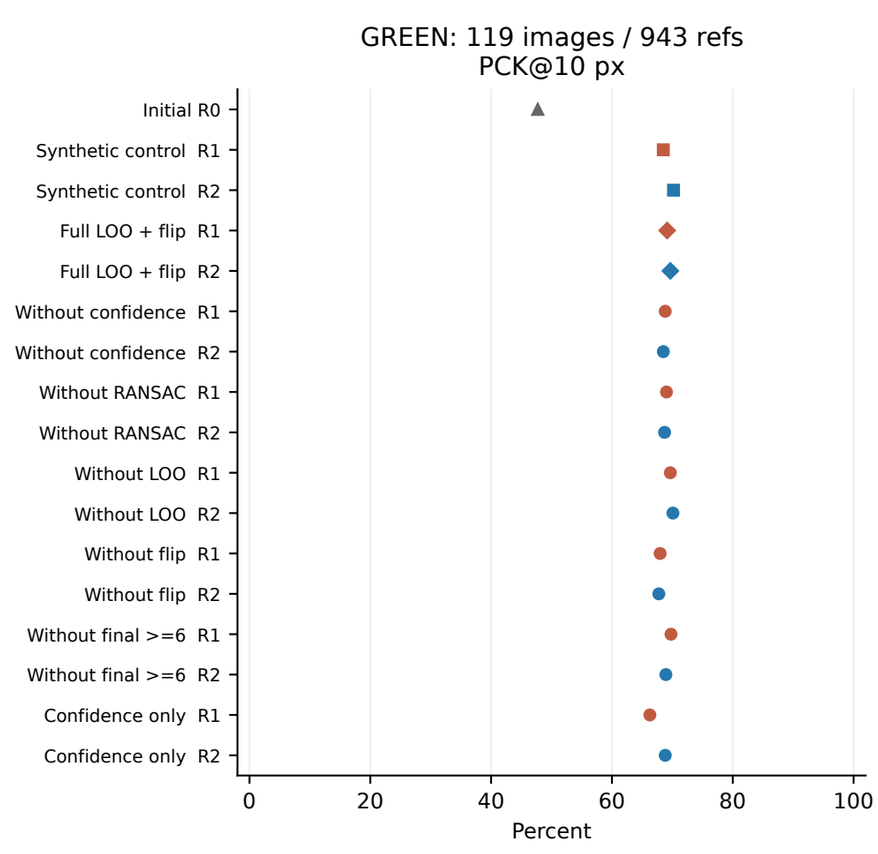

GREEN: 119 images / 943 refs
Reference coverage

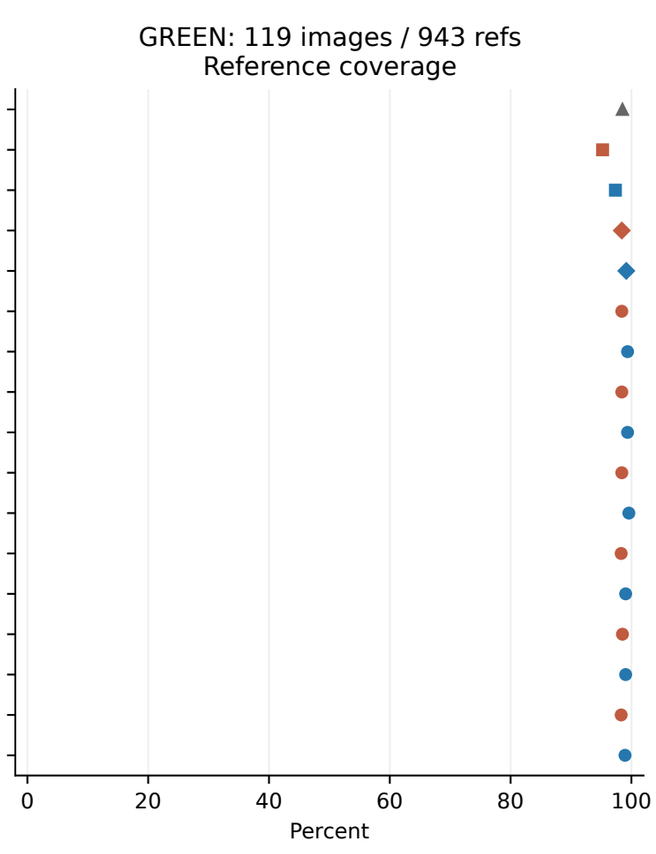

GREEN: 119 images / 943 refs
Conditional precision@10 px

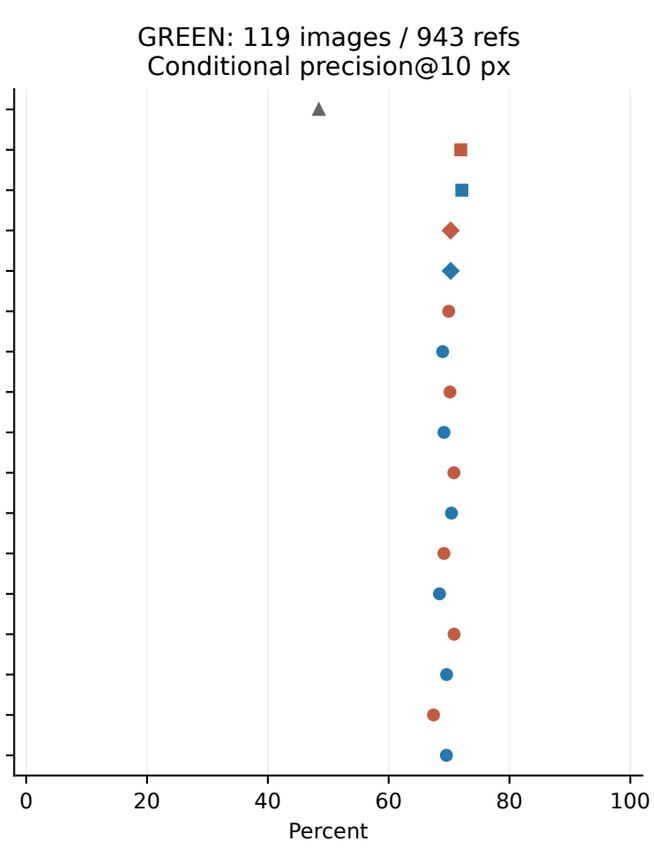

Primary evaluation: PLASTIC 128 / 985 reference points; WOOD 125 / 963; GREEN 119 / 943. Total: 372 images / 2,891 reference points.

PCK@10 = correct / all reference points (missing = failure); coverage = observed / all; precision = correct / observed.

All 51 evaluation groups retained. Absolute percentages have no error bars: no percentage SD was supplied. R1 rust; R2 blue; R0 gray.

Errors use Euclidean distance in native pixels. WOOD combines 1280 x 720 and 640 x 480 images; a fixed pixel threshold has different relative tolerance.