


Flexible PCB for connecting Allied Vision SDI to MIPI Bridge  
to hosts which have a Raspberry PI Camera Connector (15-pin 1mm pitch).


Revision 0 : Initial Release

Revision 1 : Change to alternative MIPI port to allow single bistream on SDI Bridge Board

Raspberry PI Host

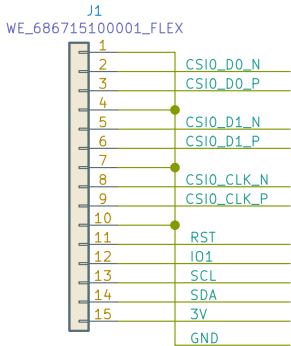

Antmicro CSI interface

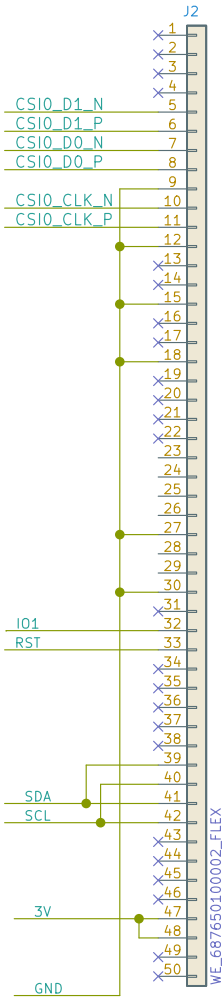

Capable Robot Components  
www.capablerobot.com

Sheet: /  
File: capablerobot\_CRP21T\_Host-15pin\_Device-50pin.sch

**Title: Flex Cable – CSI – 15 pin Host to 50 pin Device**

Size: A3	Date:	Rev: CRP21T
KiCad E.D.A. kicad (5.1.9-0-10_14)		Id: 1/1