

[illegible]

The diagram shows a 3.3V Regulator (1A) circuit. The IC is labeled U11, AP7361C-FGE-7. It has the following connections:

- IN (Pin 8):** Connected to a +5V input source.
- EN (Pin 5):** Connected to the +5V input source.
- NC (Pin 2):** Not connected (marked with an 'X').
- ADJ/NC (Pin 3):** Not connected (marked with an 'X').
- GND (Pin 6):** Connected to ground.
- OUT (Pin 1):** Connected to a +3.3V output source.

Capacitors are used for input and output filtering:







- C12 (4.7uF):** Input capacitor connected between the +5V input and the IN pin.
- C13 (4.7uF):** Output capacitor connected between the +3.3V output and the OUT pin.

BEC 5V 2A (VIN = 9V-36V)

Power Diode

The diagram illustrates a VBAT detection circuit. It consists of a voltage divider formed by two resistors, R11 and R17. R11 (18K) is connected between the +VLIPO supply and a central node. R17 (2K) is connected between this central node and ground (GND). The central node is also connected to the ADC_VBAT input, which is used for VBAT detection.

Title:		
Size: A3	Date:	Rev:
KiCad E.D.A. 10.0.1		Id: 2/4

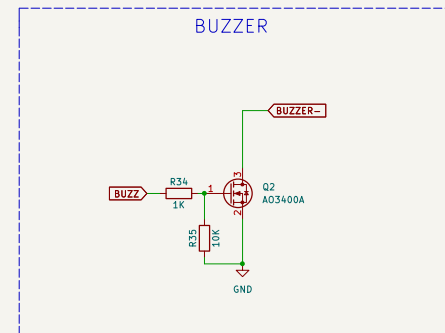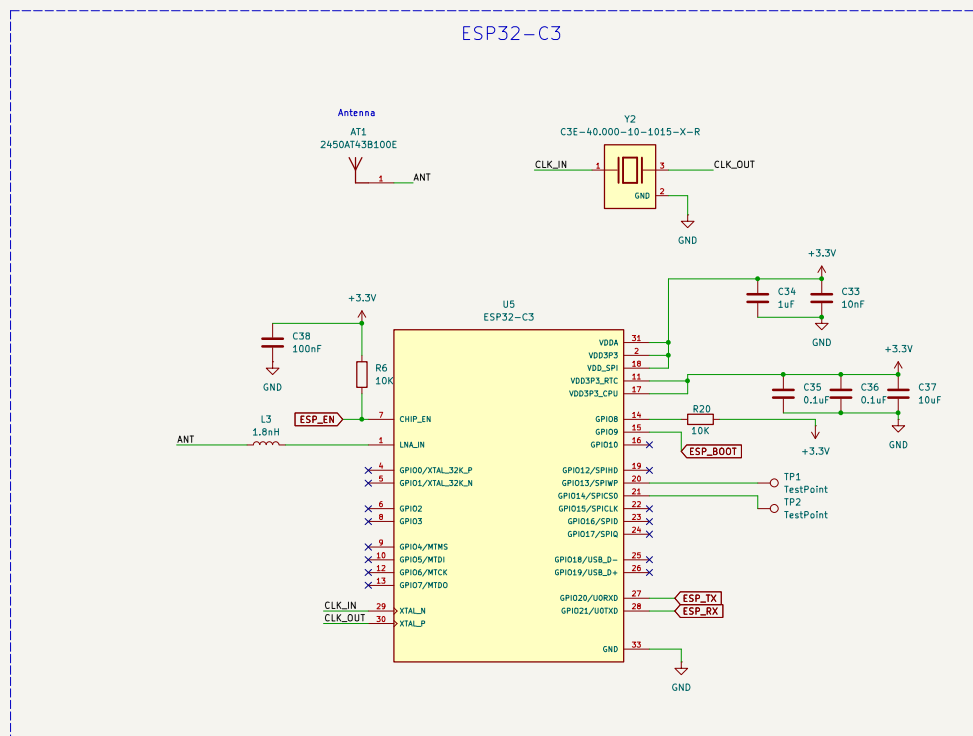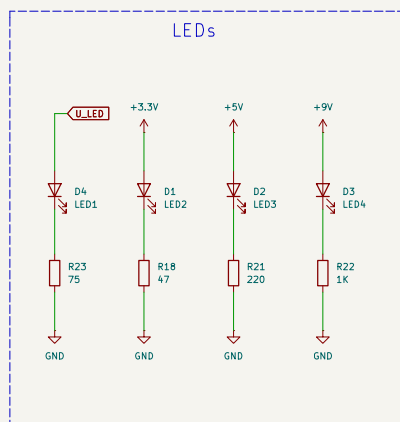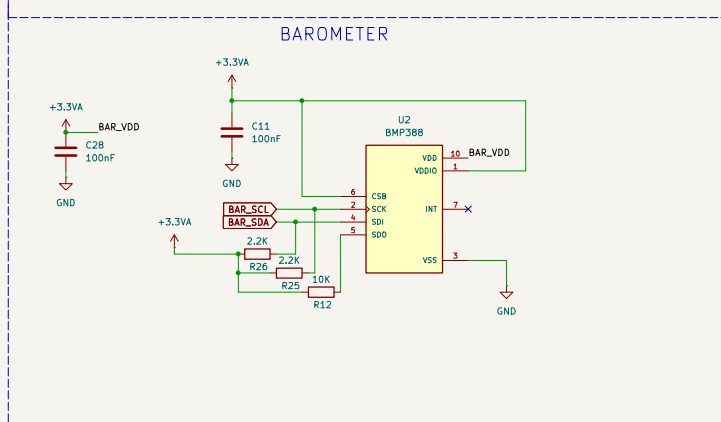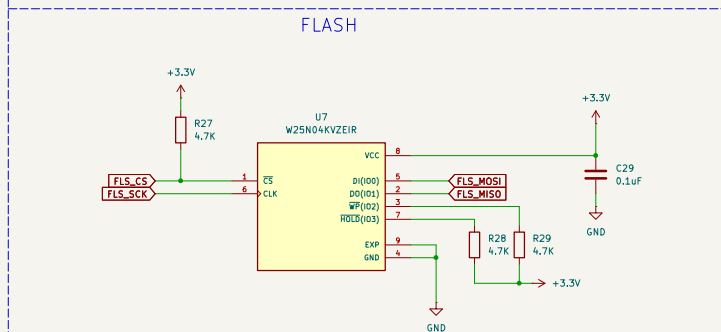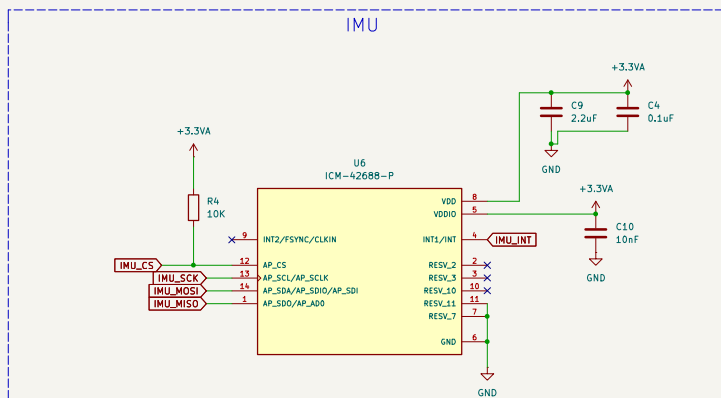

Copyright (C) 2026 Caped-Crussader
 Licensed under CERN-OHL-S v2
<https://github.com/Caped-Crussader/VENDETTAFAC>

Sheet: /Sensor Section/
 File: sensor.kicad_sch

Title:

Size: A3


Date:

Rev:


KiCad E.D.A. 10.0.1

Id: 3/4

JST Connectors and TestPoints

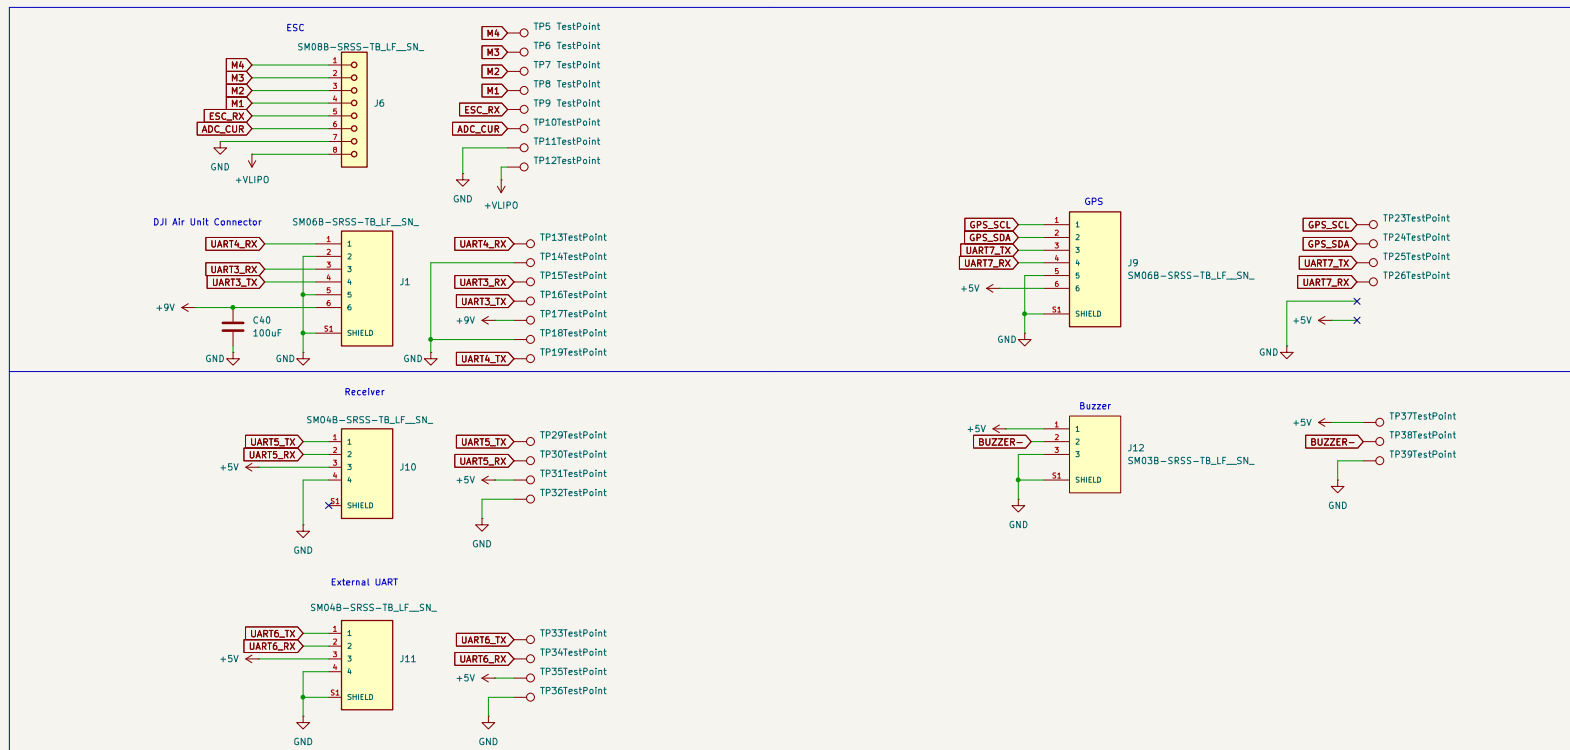

External LEDs

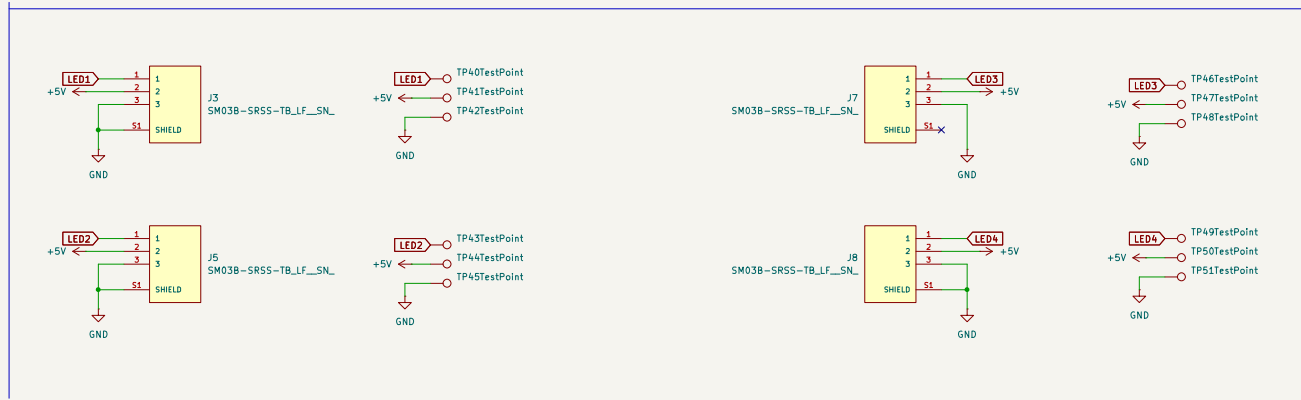

Copyright (C) 2026 Caped-Crussader
Licensed under CERN-OHL-S v2
<https://github.com/Caped-Crussader/VENDETTAFC>

Sheet: /Interface Section/
File: Interface.kicad_sch

Title:

Size: A3

Date:

Rev:

KiCad E.D.A. 10.0.1

Id: 4/4