

USB-C Connector

The schematic diagram illustrates the USB-C connector circuit. It features a USB4940-00-A_REV4 connector (J2) connected to a USBLC6-25C6 IC (U10). The IC is connected to a USB_D- and USB_D+ signal line. The circuit also includes a +5VBUS power supply, a 5V1k resistor (R1), a 5k1 resistor (R5), a 50k resistor (R2), an 80k resistor (R3), a 100nF capacitor (C32), a 1uF capacitor (C39), a 220 resistor (R31), a 5.1K resistor (R32), a 10K resistor (R33), and a diode (D7) labeled KT-0603R. The output is labeled USB_VBUS_SENSE.







The diagram shows a 3.3V Regulator (1A) circuit. The input is +5V, which is connected to the IN pin (pin 8) of the U11 IC (AP7361C-FGE-7). A capacitor C12 (4.7uF) is connected between the IN pin and GND. The EN pin (pin 5) is connected to GND. The NC pin (pin 2) is also connected to GND. The OUT pin (pin 1) is connected to the +3.3V output. A capacitor C13 (4.7uF) is connected between the OUT pin and GND. The ADJ/NC pin (pin 3) is connected to GND. The GND pin (pin 4) is also connected to GND.

BEC 5V 2A (VIN = 9V-36V)


Power Diode

The diagram illustrates a VBAT detection circuit. It consists of a voltage divider formed by two resistors, R11 and R17. R11 (18K) is connected between the +VLIPO supply and a central green node. R17 (2K) is connected between this central node and GND. The central green node is also connected to the ADC_VBAT pin, which is represented by a red box.


Rev:
Id: 2/4

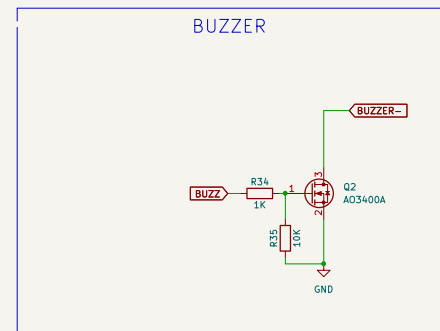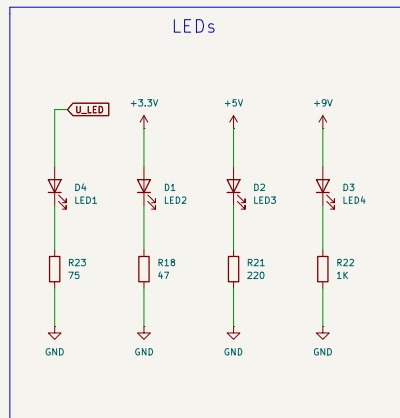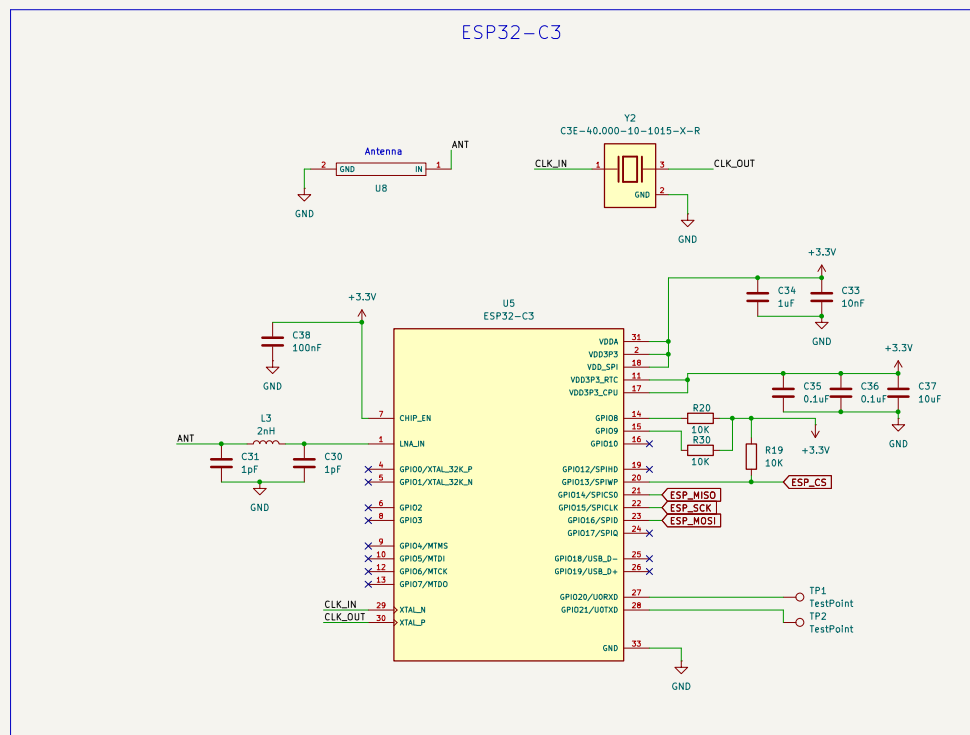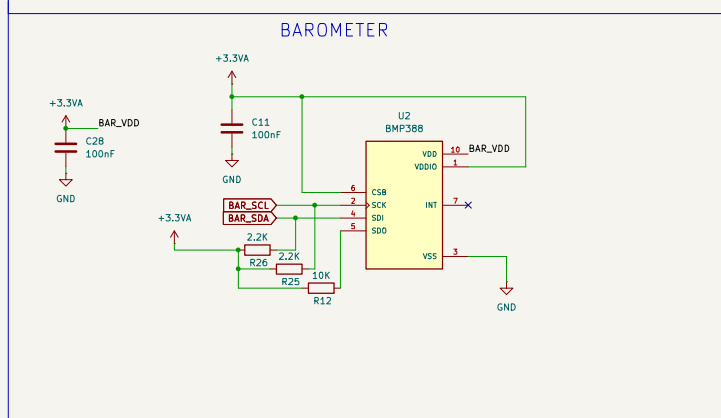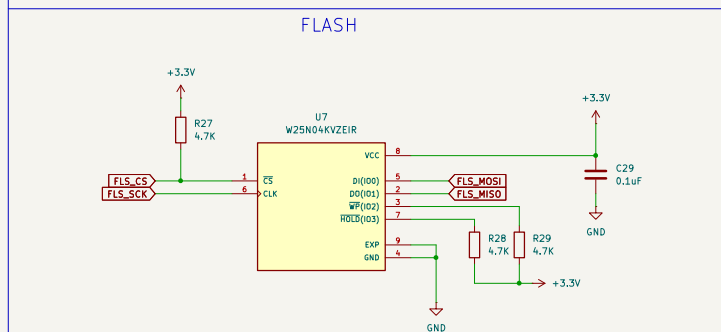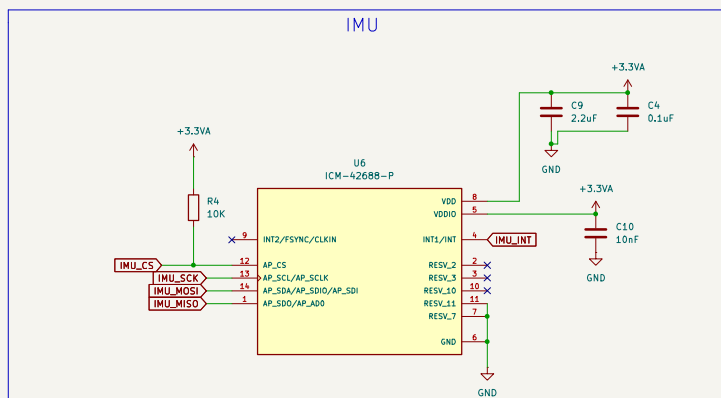

JST Connectors and TestPoints

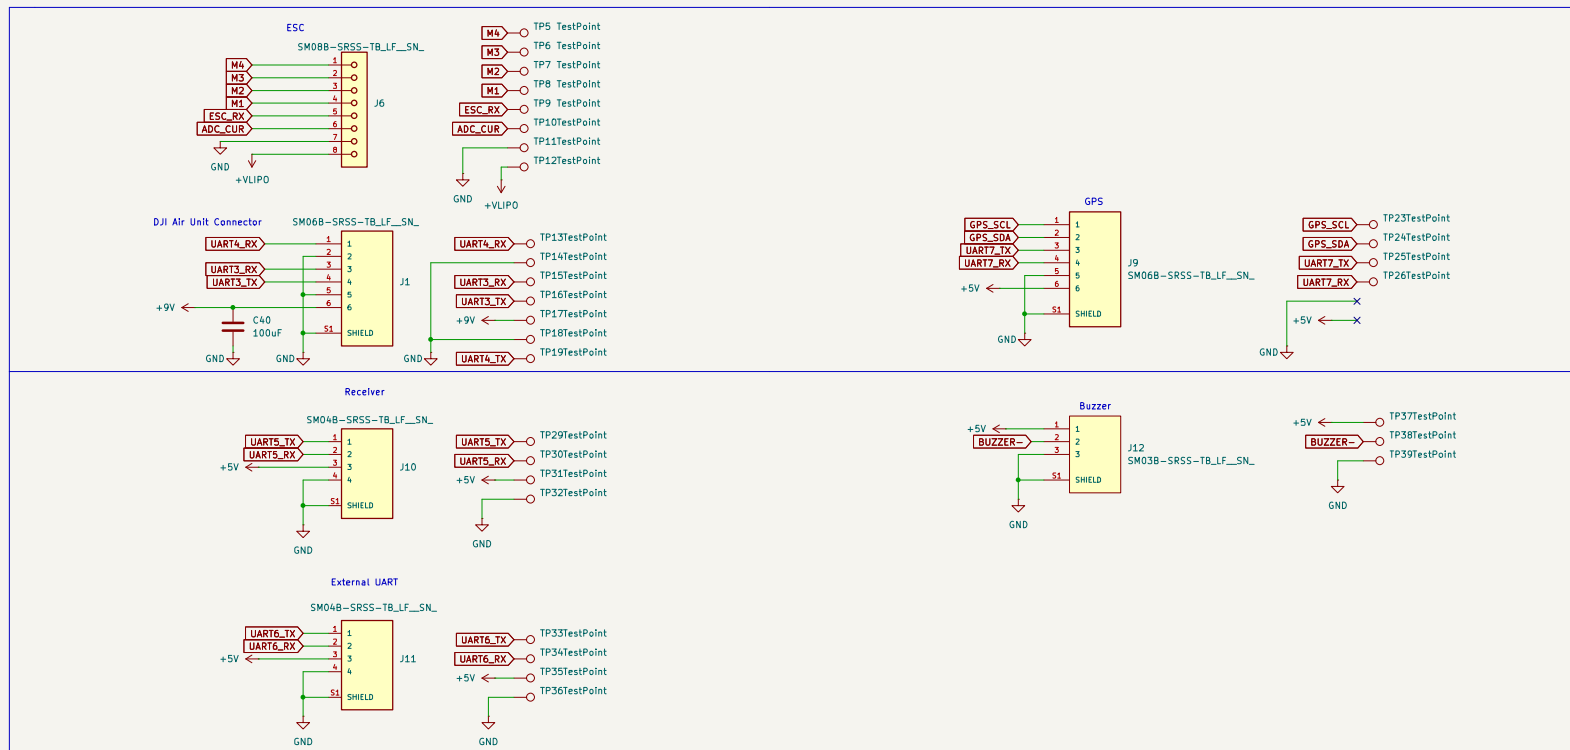

External LEDs

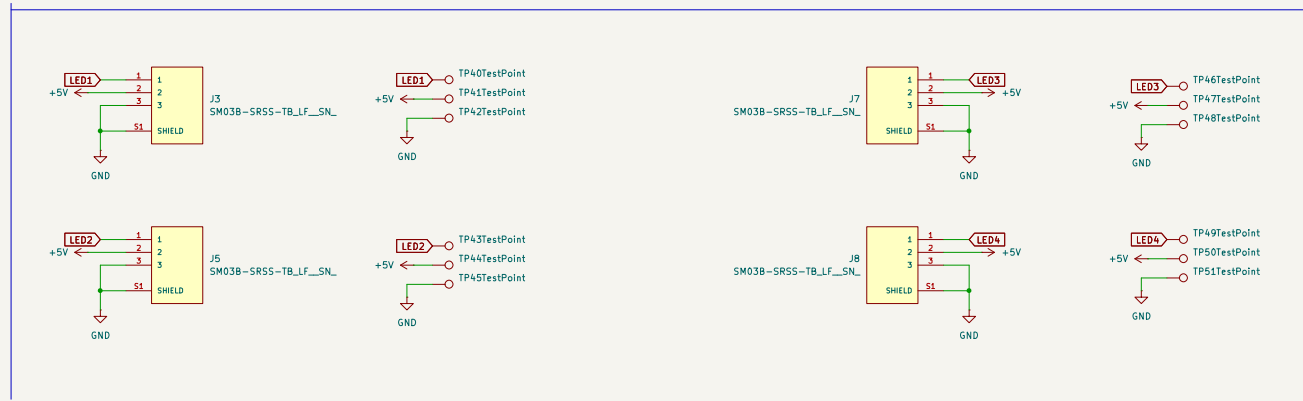

Sheet: /Interface Section/
File: Interface.kicad_sch

Title:

Size: A3

Date:

Rev:

KiCad E.D.A. 10.0.1

Id: 4/4