
Sixdof Space
ULTRA FAST OPTICAL TRACKING

System Architecture

The Sixdof tracking system is comprised of two components: the beacons and the sensor. Three or more IR Beacons serve as spatial reference, each encoded with a unique ID provided by a beacon driver. There are two sensor options, with two different system architectures.

Sixdof Kipa System Architecture

The Kipa sensor's multiple proprietary optical modules detect the beacons in real time. The sensor then performs signal processing locally with an on-board FPGA. The compressed optical data is sent to the host computer which calculates the sensor's full 6DOF position. The final estimate is then communicated to your application code in real time.

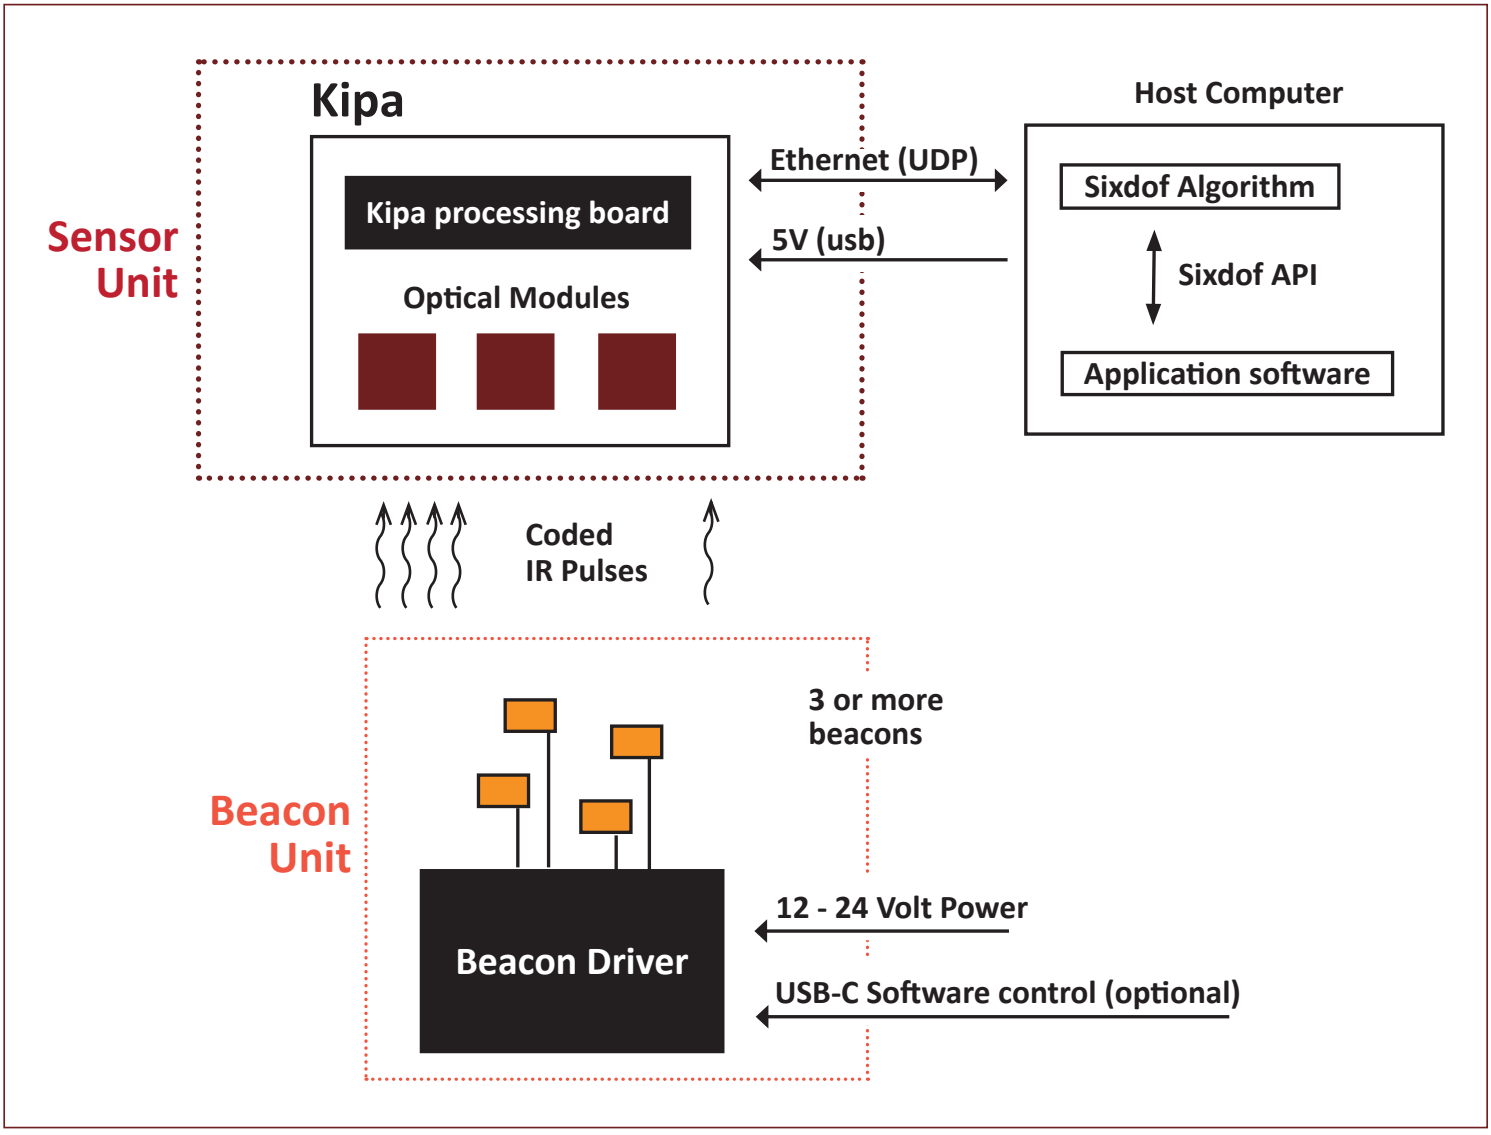

Elevate your tracking and positioning technology to Sixdof's unmatched optical tracking precision to enable autonomous robotic and drone control.


For more details, visit us at www.sixdofspace.com

Sixdof Space
ULTRA FAST OPTICAL TRACKING

System Architecture

Sixdof Kanga System Architecture

The Kanga sensor's multiple proprietary optical modules detect the beacons in real time. The sensor then performs signal processing locally with an on-board FPGA. The compressed optical data is then sent to the onboard computer which calculates the sensor's full 6DOF position. The final estimate is then communicated to your flight controller real time over a MAVLink connection, or to your application code in real time over a USB or Bluetooth connection.

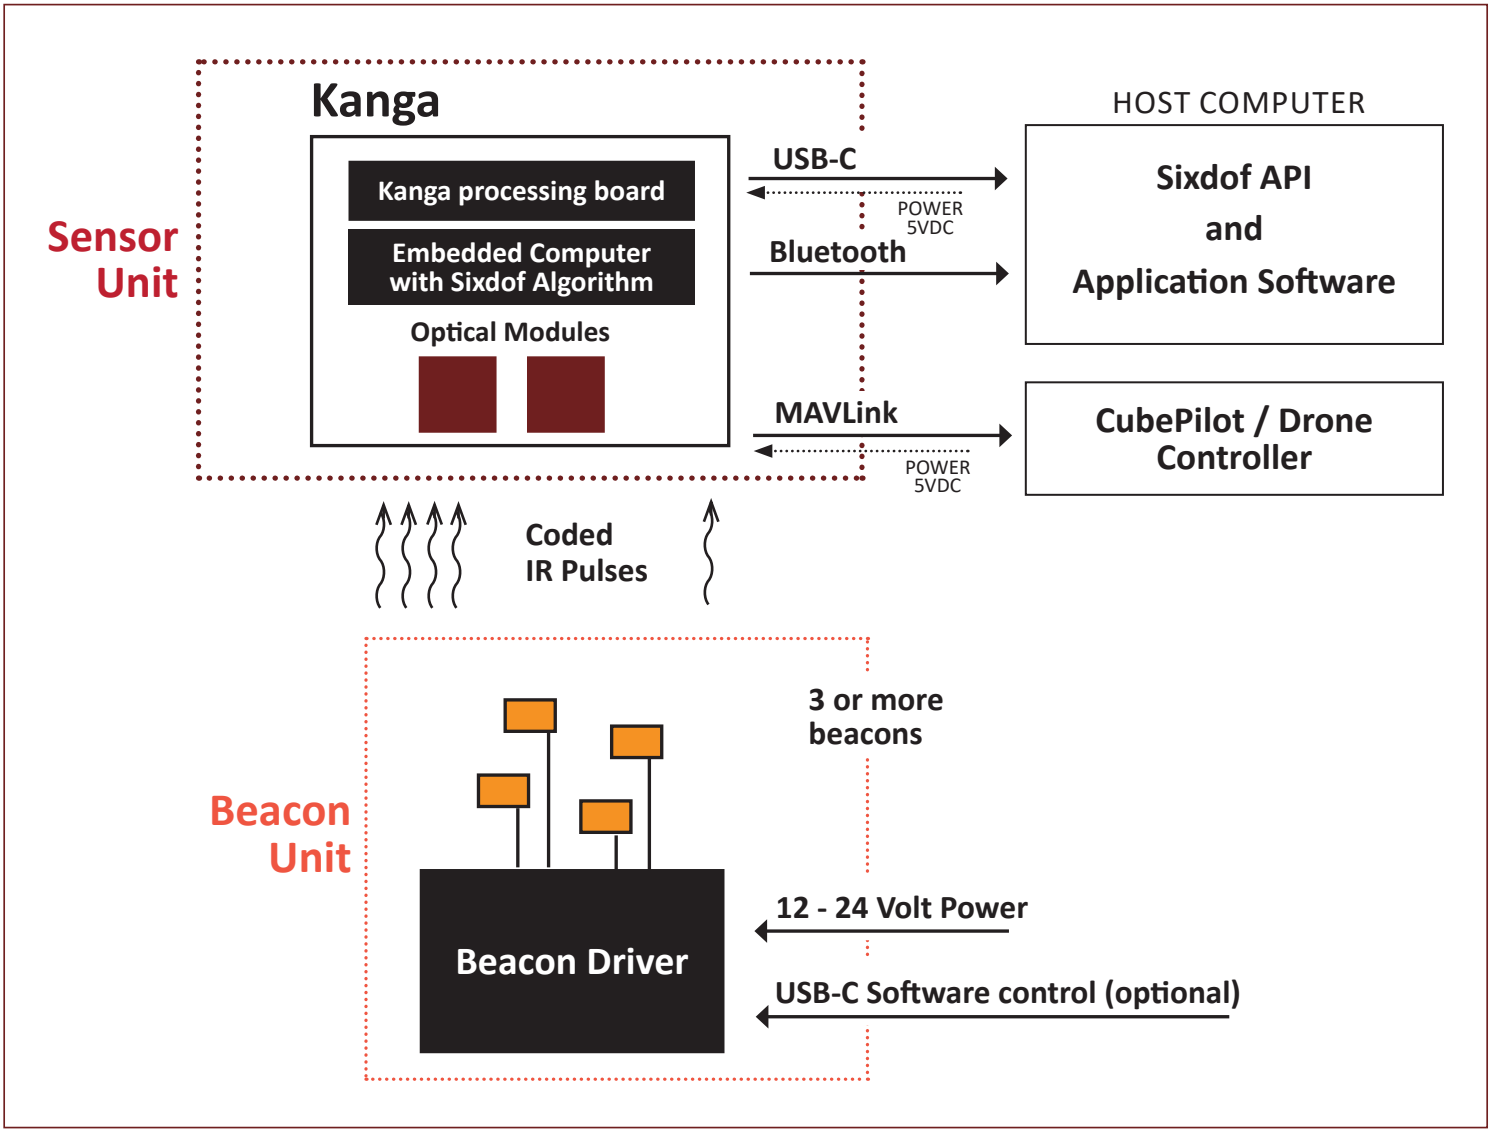

Elevate your tracking and positioning technology to Sixdof's unmatched optical tracking precision to enable autonomous robotic and drone control.

For more details, visit us at www.sixdofspace.com