N-BM20
BUILT AS BASIC

Finger	RFID	Inbuilt Battery	LAN	USB

Fingerprint Time & Attendance

Storage Capacity

Finger Capacity	1000
Card Capacity	1000
Max User	1000
Password	1000
Log Capacity	1,50,000
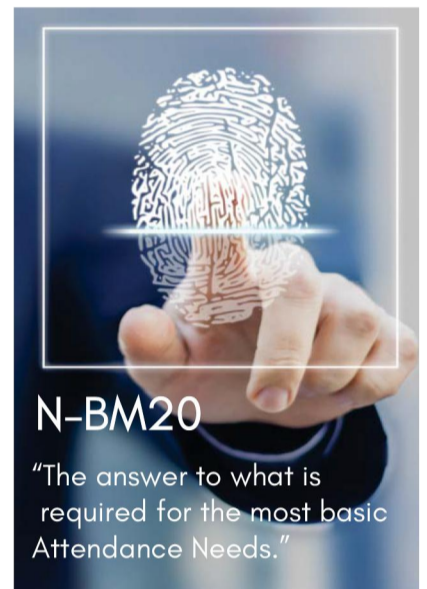
N-BM20

"The answer to what is required for the most basic Attendance Needs."

Fetures

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

www.biomaxsecurity.com

Communication Interface

Communication	TCP/IP, USB

Biometric

Push Data	YES (Optional)
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
CPU	Industrial High Speed CPU
Verification Time	<=1 second
RF card options	125kHz EM (Standard) /
	13.56MHz Mifare (Optional)

Audio/Visual

LCD	2.4" TFT color screen 320x240 pixel
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Power & Enviroment

Inbuilt Battery Backup	YES
Operating Temperature	0°c ~ 50°c
Power	5VDC/1A
Dimension	180 x 130 x 35

Accepts moist and rough Finger

Accepts Color & Mahendi Finger

TCP/IP, USB

Unaffected by High Temperatures 0° ~ 50°

Software

Desktop, Web, Cloud

Time Attendance

Access Control

Employee Self Service

Mobile App