Style Sheet

6 1/8" DPD504X
(mm)

Talon™

Reference Photo: 6-1/8 in. (155.6mm) TD504X

- **DART Approved** The well balanced and experienced Drilling Application Review Team (DART) carefully analyze the application to propose the right solution for your needs. The Network Behind the Solution.
- **Optimized Hydraulic Efficiency** Complete junk slot mapping, increased blade standoff and diverging junk slots are just some of the design elements that provide hydraulic efficiency in low-HSI applications. Also, the use of newly advanced Computational Fluid Dynamic (CFD) techniques ensure flow field in each junk slot, maximizing cuttings evacuation.
- **Talon Optimized Blade Profile** Optimized blade profiles improve drilling dynamics and efficiency, promoting a smooth cutting action.
- **StaySharp™ Polished Cutter Technology** StaySharp polished cutters are tailored to improve abrasion and impact resistance as well as diamond degradation mitigation. In addition, the industrys only polished cutters eliminate buildup on the cutter face, enhancing cutting action and cuttings removal increasing performance.
- **Enhanced Directional Control** Bit profile, gauge configuration, shorter make-up length and Baker Hughes torque management technology provide a stable design platform that mitigates vibration, holds toolface control and delivers on-plan build-up rates.

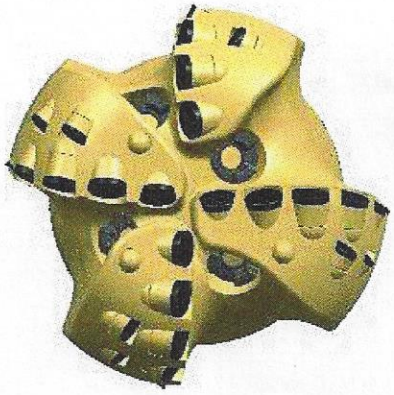

Product Specifications	
IADC:	M223
Number of Blades:	4
Cutter Quantity (Total, Face):	30, 16
Primary Cutter Size	.625 in (15.8 mm)
Number of Nozzles:	-1
Nozzle Type:	N/A
Fixed TFA	0 in² (0.0 mm²)
Gauge Length	3 in (76.1 mm)
Junk Slot Area	7.551 in² (48.7 cm²)
Bit Breaker:	C
Connection:	3-1/2 API REG
Makeup Torque:	
4 1/8" Bit Sub	5.2 - 5.7 kft-lb (7.1 - 7.7 kNm)
4 1/4" Bit Sub	6.3 - 7.0 kft-lb (8.5 - 9.5 kNm)
4 1/2" + Bit Sub	7.7 - 8.5 kft-lb (10.4 - 11.5 kNm)
Reference Part Number:	X19811

Operating Recommendations*:

Hydraulic Flow Rate:	200 - 450 gpm (750 - 1700 lpm)
Rotation Speed:	For Rotary and Motor Applications
Max. Weight On Bit:	17 klb (7 tn or kdaN)

*The ranges of bit weight and RPM shown are representative of typical operating parameters, but will not necessarily yield optimum bit life or lowest drilling cost. It is not recommended that the upper limits of both weight and RPM be run simultaneously. Contact your local Hughes Christensen representative for recommendations in your area.

www.bakerhughes.com

© 2012 Baker Hughes Incorporated. All rights reserved.