9-7/8” CR616-YR(K)

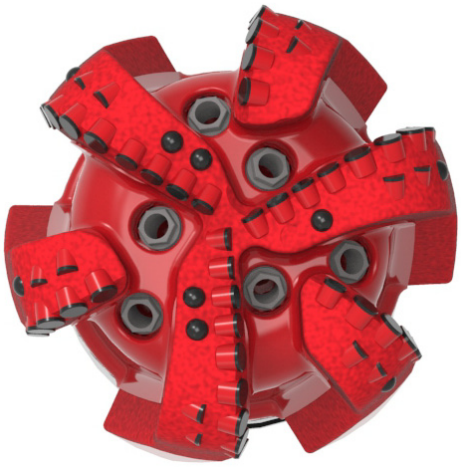

Drill Bit Specifications:

Cutter Size (Primary, Sec)	5/8”,1/2”
Cutter Count (Total, Gage)	55,6
Blade Count	6
Gage Length (Inches)	3.00
Nozzle Count (Primary, Sec.)	6
Nozzle Series (Primary, Sec.)	60
JSA (Sq. Inches)	20.8
Max. TFA (Sq. Inches)	2.23

Operating Parameters:

Max. Hydraulic Flow Rate (GPM)	700
Max. Weight on Bit (1,000 Lbs.)	40
Make-up Torque (ft/lbs)	40,563

Nominal Dimensions:

Overall Length (Inches)	*16.0
Make Up Length (Inches)	*11.1
Bit Breaker	SKB-21011
Connection	Ø6-5/8" API Reg.
Approx. Weight (Lbs.)	*160

*Long tool joint available upon request (adds 6” to fishing neck, makeup and overall length, and 64 lbs to approximate weight).

Standard Features:

- Selectively positioned bullets for smooth drilling
- Large open face volume assists cuttings removal
- Six nozzles optimize blade cleaning and cuttings removal
- Premium grade cutters maximize ROP and Life

616-YR(K) Nomenclature Explained:

- 6 = Number of blades
- 16 = Primary Cutter Size (16mm)
- YR = Backup Cutters
- K = Bullets
- 6 = Number of nozzles

3446 S. Main
Pearland, TX 77581
1-866-470-4202