12-1/4” CR616-XR9(K)(BR)

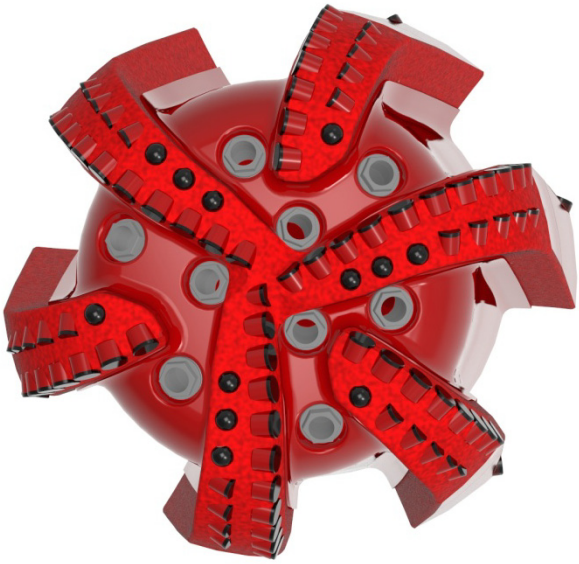

Drill Bit Specifications:

Cutter Size (Primary, Sec)	5/8”,1/2”
Cutter Count (Total, Gage, Back Ream)	92,4,6
Blade Count	6
Gage Length (Inches)	8.50
Nozzle Count (Primary, Sec.)	9
Nozzle Series (Primary, Sec.)	60
JSA (Sq. Inches)	40.77
Max. TFA (Sq. Inches)	3.34

Operating Parameters:

Max. Hydraulic Flow Rate (GPM)	1041
Max. Weight on Bit (1,000 Lbs.)	60
Make-up Torque (ft/lbs)	40,563

Nominal Dimensions:

Overall Length (Inches)	*12.69
Make Up Length (Inches)	*17.81
Bit Breaker	SKB-21036
Connection	Ø6-5/8" API Reg.
Approx. Weight (Lbs.)	*330

*Long tool joint available upon request (adds 6” to fishing neck, makeup and overall length, and 64 lbs to approximate weight).

Taylor-Made Features:

- Premium grade cutters maximize ROP and Life
- Selectively positioned bullets for smooth drilling
- PDC inserts for increased gage protection
- Nozzle configuration and large open face volume optimize blade cleaning and cuttings removal

616-XR9(K)(BR) Nomenclature Explained:

- 6 = Number of Blades
- 16 = Primary Cutter Size (16mm)
- XR = Backup Cutters
- 9 = Number of Nozzles
- K = Bullets
- BR = Back Reaming Cutters

3446 S. Main
Pearland, TX 77581
1-866-470-4202