10-5/8” CR716-XR(K)(BR)

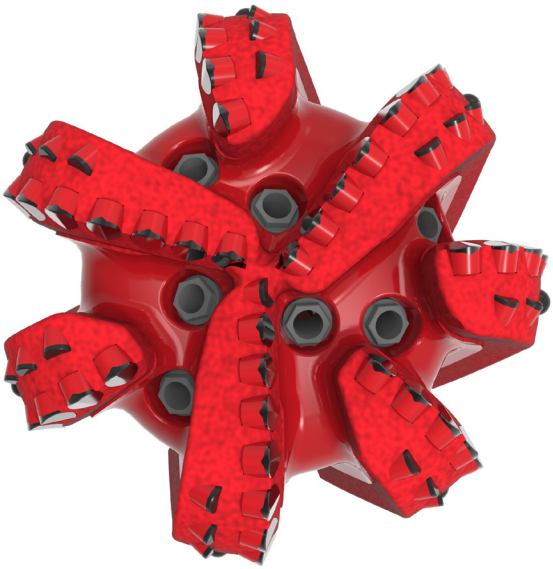

TOMAHAWK
PDC CUTTER

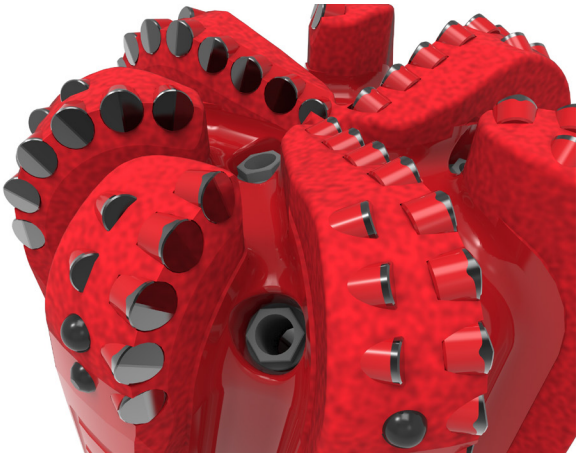

Drill Bit Specifications:

Cutter Size (Primary, Sec)	5/8”,1/2”
Cutter Count (Total, Gage, Back Ream)	77, 8, 7
Blade Count	7
Gage Length (Inches)	6.00
Nozzle Count (Primary, Sec.)	7
Nozzle Series (Primary, Sec.)	60
JSA (Sq. Inches)	19.80
Max. TFA (Sq. Inches)	2.60

Operating Parameters:

Max. Weight on Bit (1,000 Lbs.)	60
Make-up Torque (ft/lbs)	40,563

Nominal Dimensions:

Overall Length (Inches)	*18.85
Make Up Length (Inches)	*13.97
Bit Breaker	SKB-21011
Connection	Ø6-5/8" API Reg.
Approx. Weight (Lbs.)	*215

*Long tool joint available upon request (adds 6” to fishing neck, makeup and overall length, and 64 lbs to approximate weight).

Taylor-Made Features:

- Premium grade cutters maximize ROP and Life
- Nozzle configuration and large open face volume optimize blade cleaning and cuttings removal
- Back of blade relief to reduce rubbing

716-XR(K)(BR) Nomenclature Explained:

- 7 = Number of Blades
- 16 = Primary Cutter Size (16mm)
- XR = Backup Cutters
- 7 = Number of Nozzles
- K = Bullets
- BR = Back Reaming Cutters

3446 S. Main
Pearland, TX 77581
1-866-470-4202