7-7/8” CR716-SR+(K)

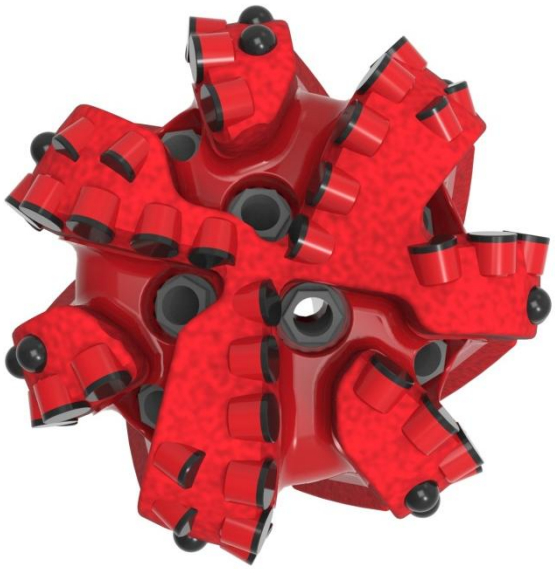

Drill Bit Specifications:

Cutter Size (Primary, Sec)	5/8”, 1/2”
Cutter Count (Total, Gage)	44,7
Blade Count	7
Gage Length (Inches)	4.00
Nozzle Count (Primary, Sec.)	7
Nozzle Series (Primary, Sec.)	60
JSA (Sq. Inches)	8.88
Max. TFA (Sq. Inches)	2.60

Operating Parameters:

Max. Weight on Bit (1,000 Lbs.)	60
Make-up Torque (ft/lbs)	17,399

Nominal Dimensions:

Overall Length (Inches)	15.62
Make Up Length (Inches)	11.50
Bit Breaker	SKB-21010
Connection	Ø4-1/2" API Reg.
Approx. Weight (Lbs.)	110

Standard Features:

- Premium grade cutters maximize ROP and Life
- Large open face volume assists cuttings removal
- Seven nozzles optimize blade cleaning and cuttings removal

716-SR+(K) Nomenclature Explained:

- 7 = Number of blades
- 16 = Primary Cutter Size (16mm)
- SR+ = Partial Backup Row of Cutters
- K = Bullets

3446 S. Main
Pearland, TX 77581
1-866-470-4202