8-1/2” CR616M-XR(BR)

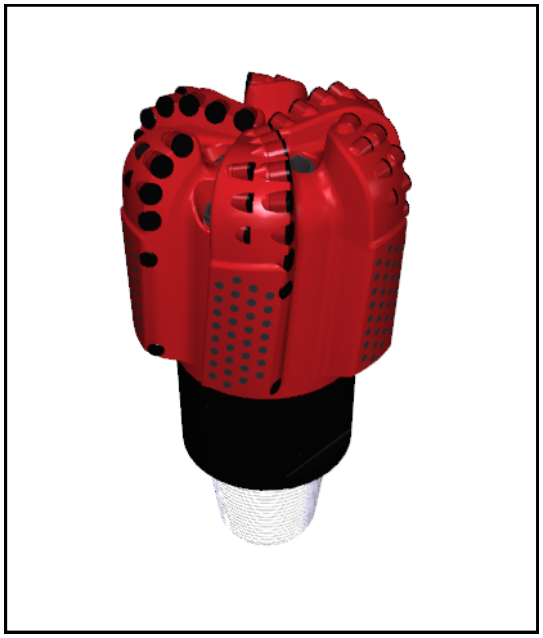

Drill Bit Specifications:

Cutter Size (Primary, Sec)	5/8”, 1/2”
Cutter Count (Total, Gage, Back Ream)	63, 12, 6
Blade Count	6
Gage Length (Inches)	4.00
Nozzle Count (Primary, Sec.)	6
Nozzle Series (Primary, Sec.)	60
JSA (Sq. Inches)	13.08
Max. TFA (Sq. Inches)	2.23

Operating Parameters:

Max. Weight on Bit (1,000 Lbs.)	60
Make-up Torque (ft/lbs)	16,488

Nominal Dimensions:

Overall Length (Inches)	16.27
Make Up Length (Inches)	12.15
Bit Breaker	SKB-21010
Connection	Ø4-1/2" API Reg.
Approx. Weight (Lbs.)	160

Tailor-Made Features:

- Premium grade cutters maximize ROP and Life
- Nozzle configuration and large open face volume optimize blade cleaning and cuttings removal

616M-XR(BR) Nomenclature Explained:

- 6 = Number of Blades
- 16 = Primary Cutter Size (16mm)
- M = Matrix Bit Body
- XR = Double Row of Cutters
- BR = Back Reaming Cutters

3446 S. Main
Pearland, TX 77581
1-866-470-4202