BIT Lab

CF616

12.250 in | 311 mm

PN: U03638 | IADC: S432

COUNTERFORCE®

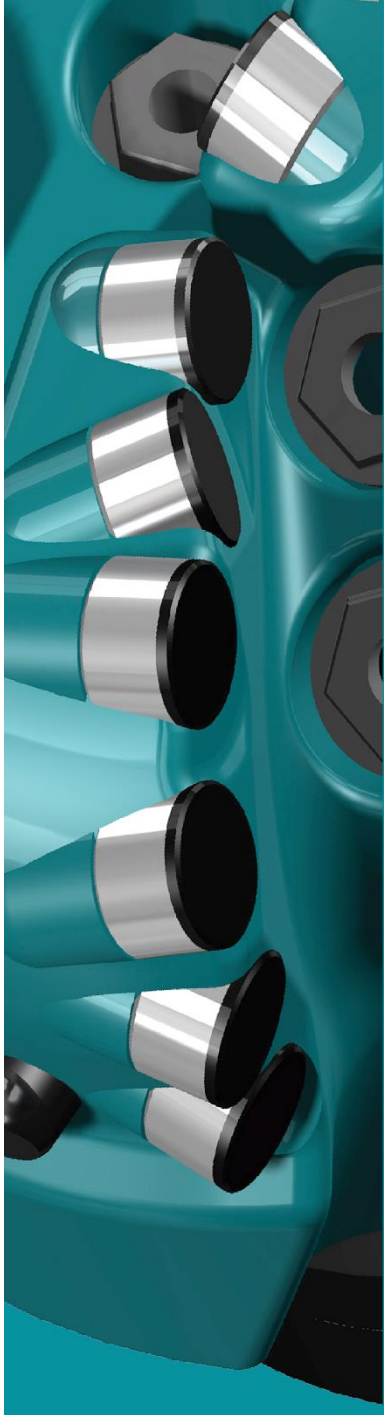

GAUGE LENGTH	6.000 in 152.4 mm	API SIZE	6-5/8 API Regular
MAKE-UP LENGTH	17.07 in 433.6 mm	RPM	Suitable for Rotary and PDM
JUNK SLOT AREA	37.7 sq in 243.2 sq cm	WOB (TYPICAL MAX)	49,000 lbs 21,800 daN

FEATURES	B - Load Limiters C - Casing Drill Out D - Double Row PDC	E - Extended Gauge G - In-Gauge PDC U - Up-Drill PDC

THIS DESIGN UTILIZES PROVEN COUNTERFORCE TECHNOLOGY TO HARNESS VIBRATIONAL ENERGY FOR FASTER ROP, LONGER RUNS, AND BETTER DULLS.

ULTERRA®

Thinking Forward. Challenging Limits.™

Powered by: UniSpec V1.50.D94

CF616

12.250 in | 311 mm

www.ulterra.com

Detail (P/N: U03638) IADC S432

Total Cutters	79
Cutter Size	5/8 in / 16 mm
Blade Count	6
Face Cutters	67 (47 Primary, 20 Double Row)
Gauge Cutters	12 (6 Up Drill)
Nozzles / Ports	6 (65 Series)
Gauge Length	6.000 in / 152.4 mm
Gauge Type	TSD & PDC & Hard Facing (2" Nominal, 4" Tapered)
Bit Material	Steel
Make-Up Length	17.07 in / 433.6 mm
Junk Slot Area	37.7 sq in / 243.2 sq cm
Face Volume	197.89 cu in / 3242.8 cu cm
Bit Connection	6-5/8 API Regular
Bit Breaker(s)	6-5/8" Regular (960004) 12.250 Cage Breaker (960005)
Rotary Speed	Suitable for Rotary and PDM
Weight on Bit (Typical Max)	49,000 lbs 21,800 daN
Flow Rate	550 - 1,200 GPM 2,000 - 4,400 LPM
Make-Up Torque	37,900 - 42,000 Ft Lb 51,400 - 56,900 N m
Features	B - Load Limiters C - Casing Drill Out D - Double Row PDC E - Extended Gauge G - In-Gauge PDC U - Up-Drill PDC

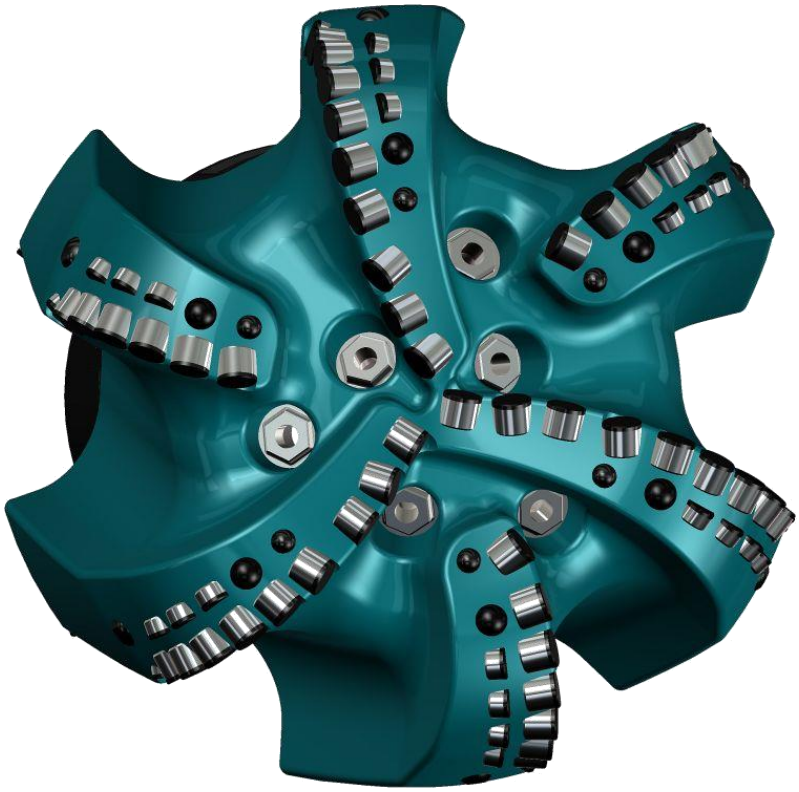

BIT Lab

These **parameters** are general guidelines. Make-Up torque parameters are based on a mid range Bit Sub OD. Please contact your local Ulterra representative for application specific recommendations.

Powered by: UniSpec V1.50.D94

Thinking Forward, Challenging Limits™

©2018 Ulterra Drilling Technologies L.P., all rights reserved. The trademarks and logos (collectively, the "Marks") set forth in this document are registered and unregistered Marks owned by Ulterra Drilling Technologies L.P.