Model

8-3/4” CR619-SR

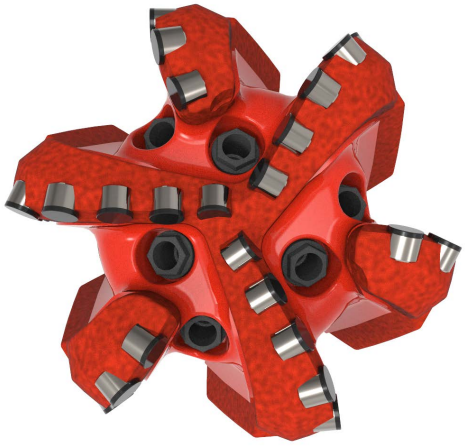

Standard Features

Premium-grade cutters to maximize ROP and extend bit life.

Nozzle placement is optimized for maximum cuttings removal.

Large open face volume to enhance cuttings removal.

Specifications

Blade Count	6
Gauge Length	3.00"
Cutter Size (Primary, Secondary)	3/4”, 5/8", 1/2”
Cutter Count (Primary, Secondary)	24, 7, 12
Nozzle Series (Primary, Secondary)	60
Nozzle Count (Primary, Secondary)	6
Max. Nozzle Size (Primary, Secondary)	22
Junk Slot Area (JSA)	20.16 in²
Max. Total Flow Area (TFA)	2.23 in²

Operating Parameters

Max. Hydraulic Flow Rate	1,030 gal/min
Max. Weight On Bit (WOB)	37,000 lbs
Make Up Torque	16,488 ft/lbs

Dimensions

Overall Length	15.375"
Make Up Length	11.250"
Weight	115 lbs
Bit Breaker	SKB-21010
Connection	4-1/2" API Reg.

Caprock DRILL BITS

3446 South Main Street | Pearland, Texas 77581 | www.caprockdrillbits.com

2017