Model

6-3/4” CR613-XR(BR)

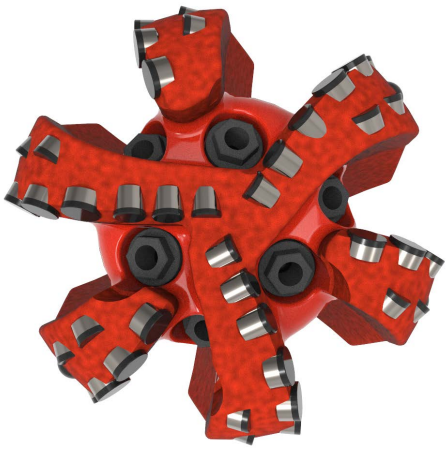

Standard Features

Premium-grade cutters to maximize ROP and extend bit life.

Nozzle placement is optimized for maximum cuttings removal.

Large open face volume to enhance cuttings removal.

Specifications

Blade Count	6
Gauge Length	1.50"
Cutter Size (Primary, Secondary)	1/2”, 7/16”
Cutter Count (Primary, Secondary)	47, 9
Nozzle Series (Primary, Secondary)	55
Nozzle Count (Primary, Secondary)	6
Max. Nozzle Size (Primary, Secondary)	18
Junk Slot Area (JSA)	12.20 in²
Max. Total Flow Area (TFA)	1.18 in²

Operating Parameters

Max. Hydraulic Flow Rate	880 gal/min
Max. Weight On Bit (WOB)	28,000 lbs
Make Up Torque	8,913 ft/lbs

Dimensions

Overall Length	10.65"
Make Up Length	6.90"
Weight	45 lbs
Bit Breaker	SKB-21012
Connection	3-1/2" API Reg.

Caprock DRILL BITS

3446 South Main Street | Pearland, Texas 77581 | www.caprockdrillbits.com