Model

17-1/2" CR716-SR10(K)

Standard Features

Premium-grade cutters to maximize ROP and extend bit life.
Nozzle placement is optimized for maximum cuttings removal.

Specifications

Blade Count	7
Gauge Length	7.0"
Cutter Size (Primary, Secondary)	5/8”
Cutter Count (Primary, Secondary)	80
Nozzle Series (Primary, Secondary)	60
Nozzle Count (Primary, Secondary)	10
Max. Nozzle Size (Primary, Secondary)	22
Junk Slot Area (JSA)	76.90 in^2
Max. Total Flow Area (TFA)	3.71 in^2

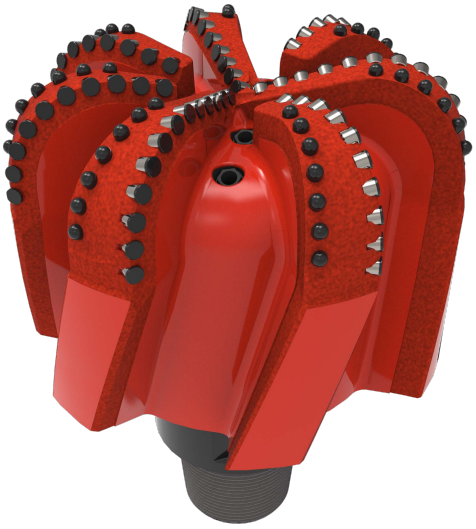

Operating Parameters

Max. Hydraulic Flow Rate	1,550 gal/min
Max. Weight On Bit (WOB)	60,000 lbs
Make Up Torque	40,500 ft/lbs

Dimensions

Overall Length	22.50"
Make Up Length	17.63"
Weight	615 lbs
Bit Breaker	SKB-21036
Connection	6-5/8" API Reg.

Caprock DRILL BITS
3446 South Main Street | Pearland, Texas 77581 | www.caprockdrillbits.com