Model

7-7/8” DR16(BR)

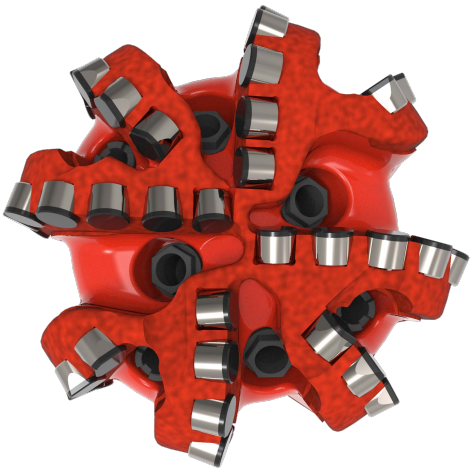

Standard Features

Premium-grade cutters to maximize ROP and extend bit life.

Nozzle placement is optimized for maximum cuttings removal.

Large open face volume to enhance cuttings removal.

Specifications

Blade Count	8
Gauge Length	4.00"
Cutter Size (Primary, Secondary)	5/8”
Cutter Count (Primary, Secondary)	43
Nozzle Series (Primary, Secondary)	60, 45
Nozzle Count (Primary, Secondary)	4, 4
Max. Nozzle Size (Primary, Secondary)	22, 16
Junk Slot Area (JSA)	9.29 in²
Max. Total Flow Area (TFA)	2.27 in²

Operating Parameters

Max. Hydraulic Flow Rate	1,380 gal/min
Max. Weight On Bit (WOB)	60,000 lbs
Make Up Torque	17,399 ft/lbs

Dimensions

Overall Length	14.85"
Make Up Length	10.72"
Weight	100 lbs
Bit Breaker	SKB-21010
Connection	4-1/2" API Reg.

Caprock DRILL BITS

3446 South Main Street | Pearland, Texas 77581 | www.caprockdrillbits.com