Model

4-3/4” CR611-SR

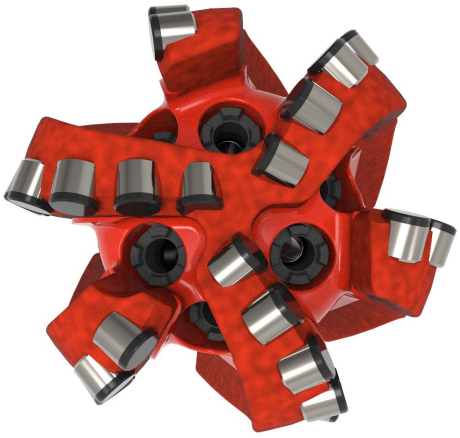

Standard Features

Premium-grade cutters to maximize ROP and extend bit life.

Nozzle placement is optimized for maximum cuttings removal.

Large open face volume to enhance cuttings removal.

Specifications

Blade Count	6
Gauge Length	2.50"
Cutter Size (Primary, Secondary)	7/16”
Cutter Count (Primary, Secondary)	26
Nozzle Series (Primary, Secondary)	35
Nozzle Count (Primary, Secondary)	6
Max. Nozzle Size (Primary, Secondary)	12
Junk Slot Area (JSA)	4.924 in²
Max. Total Flow Area (TFA)	0.66 in²

Operating Parameters

Max. Hydraulic Flow Rate	600 gal/min
Max. Weight On Bit (WOB)	15,000 lbs
Make Up Torque	4,613 ft/lbs

Dimensions

Overall Length	9.69"
Make Up Length	6.31"
Weight	20 lbs
Bit Breaker	SKB-21013
Connection	2-7/8" API Reg.

Caprock DRILL BITS

3446 South Main Street | Pearland, Texas 77581 | www.caprockdrillbits.com