The Engineers' and Developers' Tool for Visualizing Sampled Values

Visualize Sampled Values

SVScout (P0006496) is a measurement and testing tool for protection engineers and IED developers working with Sampled Values according to IEC 61850 and IEC 61869-9. It subscribes to the Sampled Values streams from one or multiple merging units and displays the waveforms of the primary voltages and currents in an oscilloscope view. Individual values on the traces can be looked up and compared with each other.

The functionality of SVScout covers many different tasks reaching from the simple display of Sampled Values streams to the detailed investigation of a merging unit. For example, the software can be used for commissioning or for evaluating and developing of IEDs.

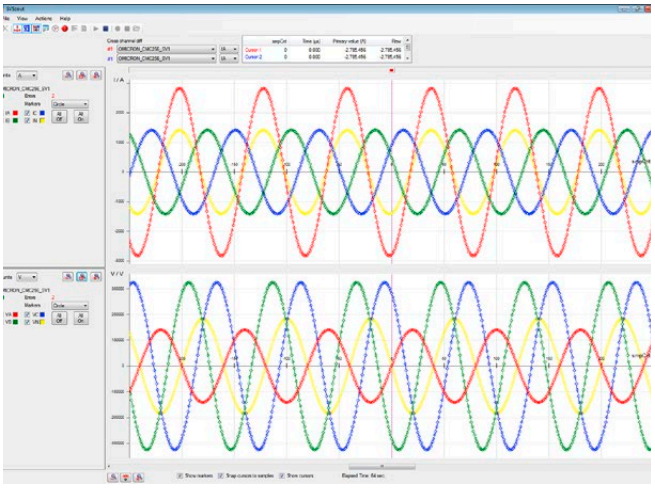

SVScout supports Sampled Values according to the implementation guideline of the UCA International Users Group with 80 or 256 samples per cycle as well as IEC 61869-9.

Phasor Diagram

RMS values and phase angles are calculated from the Sampled Values and displayed in a phasor diagram and a table. The reference for the phase angles is selectable.

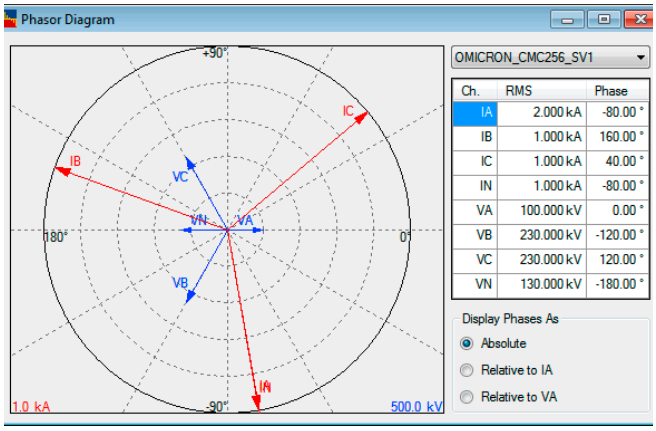

Reports

Reports summarize the essential information from a measurement. They contain all information and results provided in the individual views for each captured Sampled Values stream. Additionally, other data, such as basic settings from the configuration and stream information, are included. Printing of reports can be initiated directly from the report window.

Recording

Captured Sampled Values can be saved to COMTRADE or PCAP files for in-depth offline evaluation or documentation.

Detail View

The Detail View provides additional information about a selected Samples Values stream and its individual channels. This includes the zero crossings of specific channels, values for individual samples, and the decoded quality information. The simulation indication, as defined in IEC 61850 Ed. 2, is also visualized.

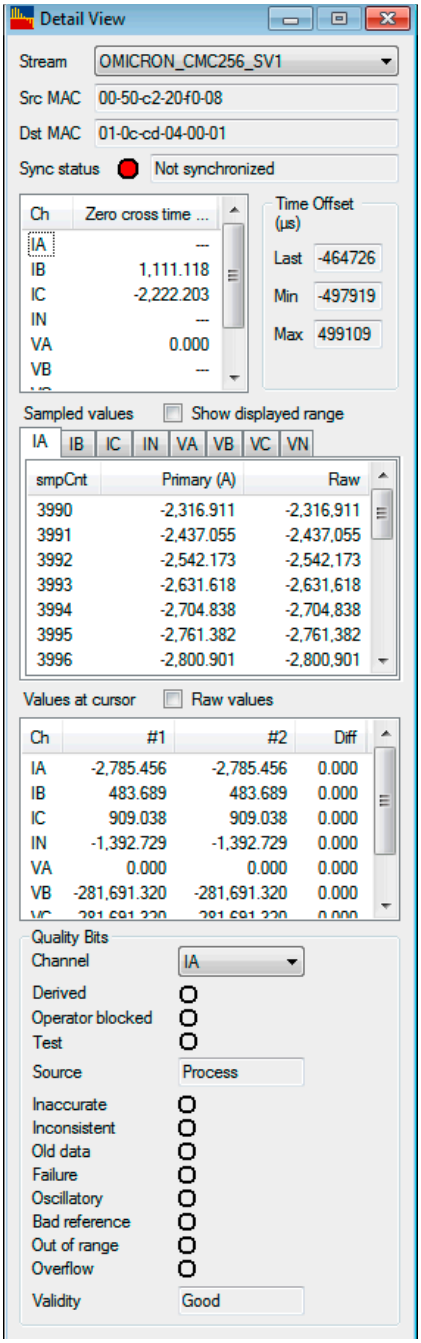

Configuration

The comprehensive and flexible features of SVScout can be configured in detail with the following settings:

Network
Sources of the Sampled Values to be processed by SVScout.

Application
General parameters for the interpretation and scaling of the Sampled Values.

Recording
Data format, file name, and file location of recordings.

Report
Headings, fonts, and logo image for customizable test reports.

Histograms
Parameters for displaying and calculating the timing statistics.

Expert
Settings for the Detail View and the determination of zero crossings.

Your benefits

- Simultaneous investigation of multiple Sampled Values streams
- Support of established 9-2LE as well as new IEC 61869-9
- Display of RMS values, phasor diagram, and detailed information
- Recording of Sampled Values in COMTRADE or PCAP format
- Play from capture supported
- Printable reports