

The Load and Save commands added to 6809/6800 and FLEX: ASSIST09 have been improved.

 flexonsbd.blogspot.com/2018/06/assist09load-save.html

Wednesday, June 27, 2018

I improved the Load and Save commands that were added to ASSIST09.

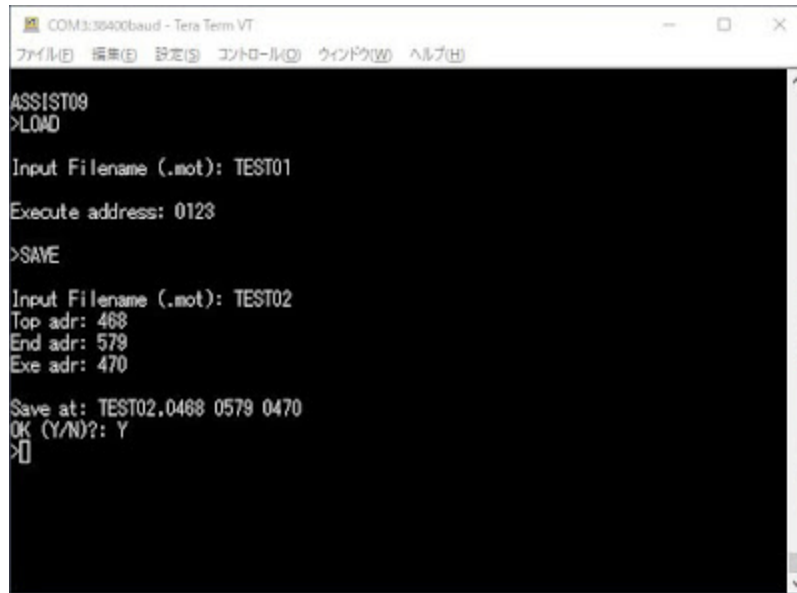
The Load and Save commands added to ASSIST09 were difficult to use.

The Load and Save commands for ASSIST09, which were introduced in the blog on May 26th, have been improved because some usability issues became apparent during use.

The drawbacks were:

- (1) having to launch slwin.exe on the Windows side every time, and
- (2) saving starting from an address that does not end in 0, saving 16 bytes at a time from that value, making it difficult to compare with memory dump values.

Therefore, the Load and Save commands can now be used repeatedly as long as the Windows software is not closed after launching it from the command prompt window. Additionally, the number of bytes saved on the first line has been adjusted so that addresses are saved at convenient round numbers.

A screenshot of a Tera Term VT window titled 'COM3:38400baud - Tera Term VT'. The window has a menu bar with 'ファイル(F)', '編集(E)', '設定(S)', 'コントロール(C)', 'ウィンドウ(W)', and 'ヘルプ(H)'. The main text area shows the following commands and responses:

```
ASSIST09
>LOAD

Input Filename (.mot): TEST01
Execute address: 0123

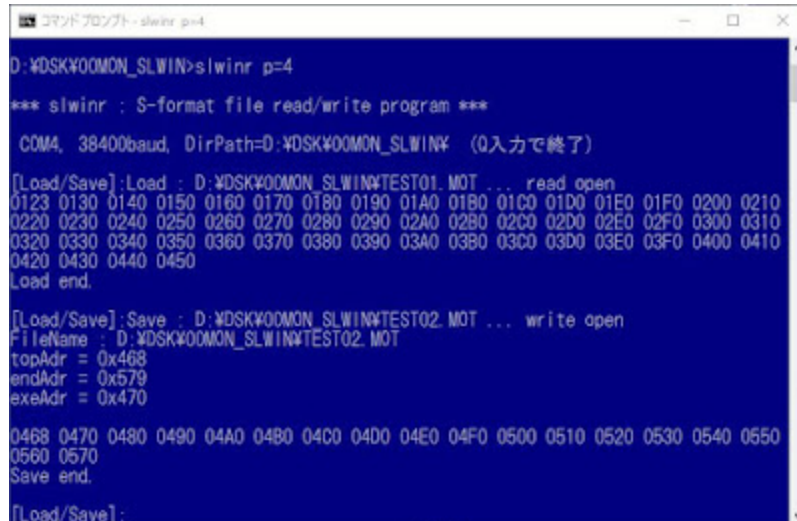
>SAVE

Input Filename (.mot): TEST02
Top adr: 468
End adr: 579
Exe adr: 470

Save at: TEST02.0468 0579 0470
OK (Y/N)?: Y
>
```

Command issuance process

The command usage is exactly the same.

A screenshot of a Windows command prompt window titled 'コマンドプロンプト - slwinr p=4'. The prompt shows the command 'D:\YDSKY00MON_SLWIN>slwinr p=4'. The output is as follows:

```
*** slwinr : S-format file read/write program ***

COM4, 38400baud, DirPath=D:\YDSKY00MON_SLWIN\ (Q入力で終了)

[Load/Save]:Load : D:\YDSKY00MON_SLWIN\TEST01.MOT ... read open
0123 0130 0140 0150 0160 0170 0180 0190 01A0 01B0 01C0 01D0 01E0 01F0 0200 0210
0220 0230 0240 0250 0260 0270 0280 0290 02A0 02B0 02C0 02D0 02E0 02F0 0300 0310
0320 0330 0340 0350 0360 0370 0380 0390 03A0 03B0 03C0 03D0 03E0 03F0 0400 0410
0420 0430 0440 0450
Load end.

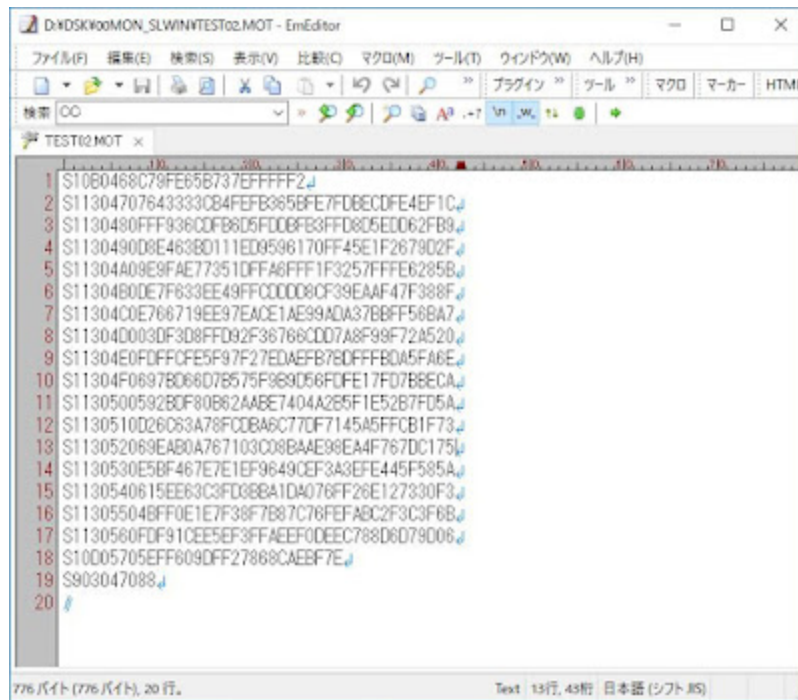
[Load/Save]:Save : D:\YDSKY00MON_SLWIN\TEST02.MOT ... write open
FileName : D:\YDSKY00MON_SLWIN\TEST02.MOT
topAdr = 0x468
endAdr = 0x579
exeAdr = 0x470

0468 0470 0480 0490 04A0 04B0 04C0 04D0 04E0 04F0 0500 0510 0520 0530 0540 0550
0560 0570
Save end.

[Load/Save]:
```

Windows side status

A single launch allows you to use the Load and Save commands continuously. To exit, press Q and wait a moment.



```
1 S10B0468C79FE65B737EFFFFF2
2 S11304707643333C84FEFB365BE7FD6ECDFE4EF1C
3 S1130480FFF936CDFB8D5FDC6FB3FFD8C5EDD62FB9
4 S1130490D8E463BD111ED9596170FF45E1F2679D2F
5 S11304A08E9FAE77351DFFA6FFF1F3257FFFE6285B
6 S11304B0DE7F833EE49FFCDDC8CF39EAAF47F388F
7 S11304C0E766719EE97EACE1AE99ADA37B8FF56BA7
8 S11304D003DF3D8FFD92F36766CDD7A8F98F72A520
9 S11304E0FDFCFE5F97F27EDAEB79DFFFBDA5FA6E
10 S11304F0697BD66D78575F969D56FDFE17FD7B8ECA
11 S1130500592BDF80B82AABE7404A2E5F1E52B7FD5A
12 S1130510D26C3A78FCDBA6C77DF7145A5FFCB1F73
13 S113052069EAB0A767103C08BAE98EA4F767DC175
14 S1130530E5BF467E7E1EF9649CEF3A3EFE445F585A
15 S1130540615EE63C3FD3BBA1DA076FF26E127330F3
16 S11305504BFF0E1E7F38F7B87C76FEFABC2F3C3F6B
17 S1130560FDF91CEE5EF3FFAEF0DEEC788D6D79D06
18 S10D05705EFF609DFF27868CAEBF7E
19 S903047088
20
```

The created MOT file

This is the content of the MOT file saved with the Save command.

From the second line onwards, the data is saved using convenient address values.

The unfortunate thing is...

I had to make some minor adjustments to the ASSIST09 program to match, so the monitor ROM had to be reflashed. I've uploaded

the ASSIST09 program and the Windows program (renamed slwinr.exe) to [Microsoft's OneDrive](#).