

NXP NTAG® 215

ABS RFID Key Fob Tag



Key Features

Operating Frequency
HF 13.56MHz

Chip Type
NXP NTAG® 215

International Standard
ISO/IEC 14443-A, ISO/IEC 14443-3,
NFC Forum Type 2

EEPROM Memory
540 bytes

R/W Availability
R/W

Certificate
WEEE directive

Characteristics
Waterproof

1. Product Overview

This is a compact and flexible ABS RFID keychain tag equipped with NXP NTAG®215 chip. The tag is made from sturdy ABS plastic and comes with a keyring attachment, perfect for easy integration into a key-chain or lanyard. Its versatile functionality extends to cashless payments, access control systems, parking lots, and more, making it an essential tool for a variety of applications.

2. Product Parameters

2.1 Physical Characteristics

SKU	AZKF-NTAG215-ABS					
Material	ABS					
Model No.	ABS-01	ABS-02	ABS-03	ABS-06	ABS-08	ABS-08 (slotless)
Size	44×31×5mm	35×28×4.8mm	40×32×3.8mm	51×32×5.9mm	37×30×8mm	37×30×8mm
Color	<div><div>● Red</div><div>● Yellow</div><div>● Blue</div><div>● Black</div></div> <div><div>● Grey</div><div>● Green</div><div>● Orange</div></div>	<div><div>● Red</div><div>● Yellow</div><div>● Blue</div><div>● Black</div></div> <div><div>● Grey</div><div>● Green</div><div>● Orange</div></div>	<div><div>● Red</div><div>● Yellow</div><div>● Blue</div><div>● Black</div><div>○ White</div></div> <div><div>● Grey</div><div>● Green</div><div>● Orange</div><div>● Brown</div><div>● Light Green</div></div>	<div><div>● Red</div><div>● Yellow</div><div>● Blue</div></div>	<div><div>● Red</div><div>● Yellow</div><div>● Blue</div><div>● Black</div></div> <div><div>● Grey</div><div>● Green</div><div>● Orange</div><div>● Light Green</div></div>	<div><div>● Red</div><div>● Yellow</div><div>● Blue</div><div>● Black</div></div> <div><div>● Grey</div><div>● Green</div><div>● Orange</div><div>● Light Green</div></div>
Weight	5g/piece	4g/piece	4g/piece	5.5g/piece	5g/piece	5g/piece

2.2 Packaging

Format	Packed in box					
Quantity	50 pieces/bag, 1500 pieces/carton	100 pieces/bag, 2500 pieces/carton	100 pieces/bag, 2500 pieces/carton	50 pieces/bag, 1500 pieces/carton	50 pieces/bag, 2000 pieces/carton	50 pieces/bag, 2000 pieces/carton
Carton Dimension	49×24×20cm					
Weight	N.W. 7.5KG/carton, G.W. 8.5KG/carton	N.W. 10KG/carton, G.W. 11KG/carton	N.W. 10KG/carton, G.W. 11KG/carton	N.W. 8.25KG/carton, G.W. 9KG/carton	N.W. 10KG/carton, G.W. 11KG/carton	N.W. 10KG/carton, G.W. 11KG/carton



2.3 Technical Parameters

Operating Frequency	13.56MHz
Communication Protocol	ISO/IEC 14443-A, ISO/IEC 14443-3, NFC Forum Type 2
UID	7 byte
EEPROM	540 bytes
User Read/Write Area	504 bytes


2.4 Chip Characteristics

Chip Manufacturer	NXP
Chip Type	NTAG® 215
Data Retention	10 years
Write Endurance	100,000 times
Operating Distance	up to 10cm
Communication Speed	106 kbit/s
High data integrity	16 Bit CRC, parity, bit coding, bit counting
Input Capacitance	50 pF

2.5 Additional Information

Operating Environment	-20°C to +80°C
Application	Cashless payment Access control system Car parking, etc.

3. Size and Specification Drawing

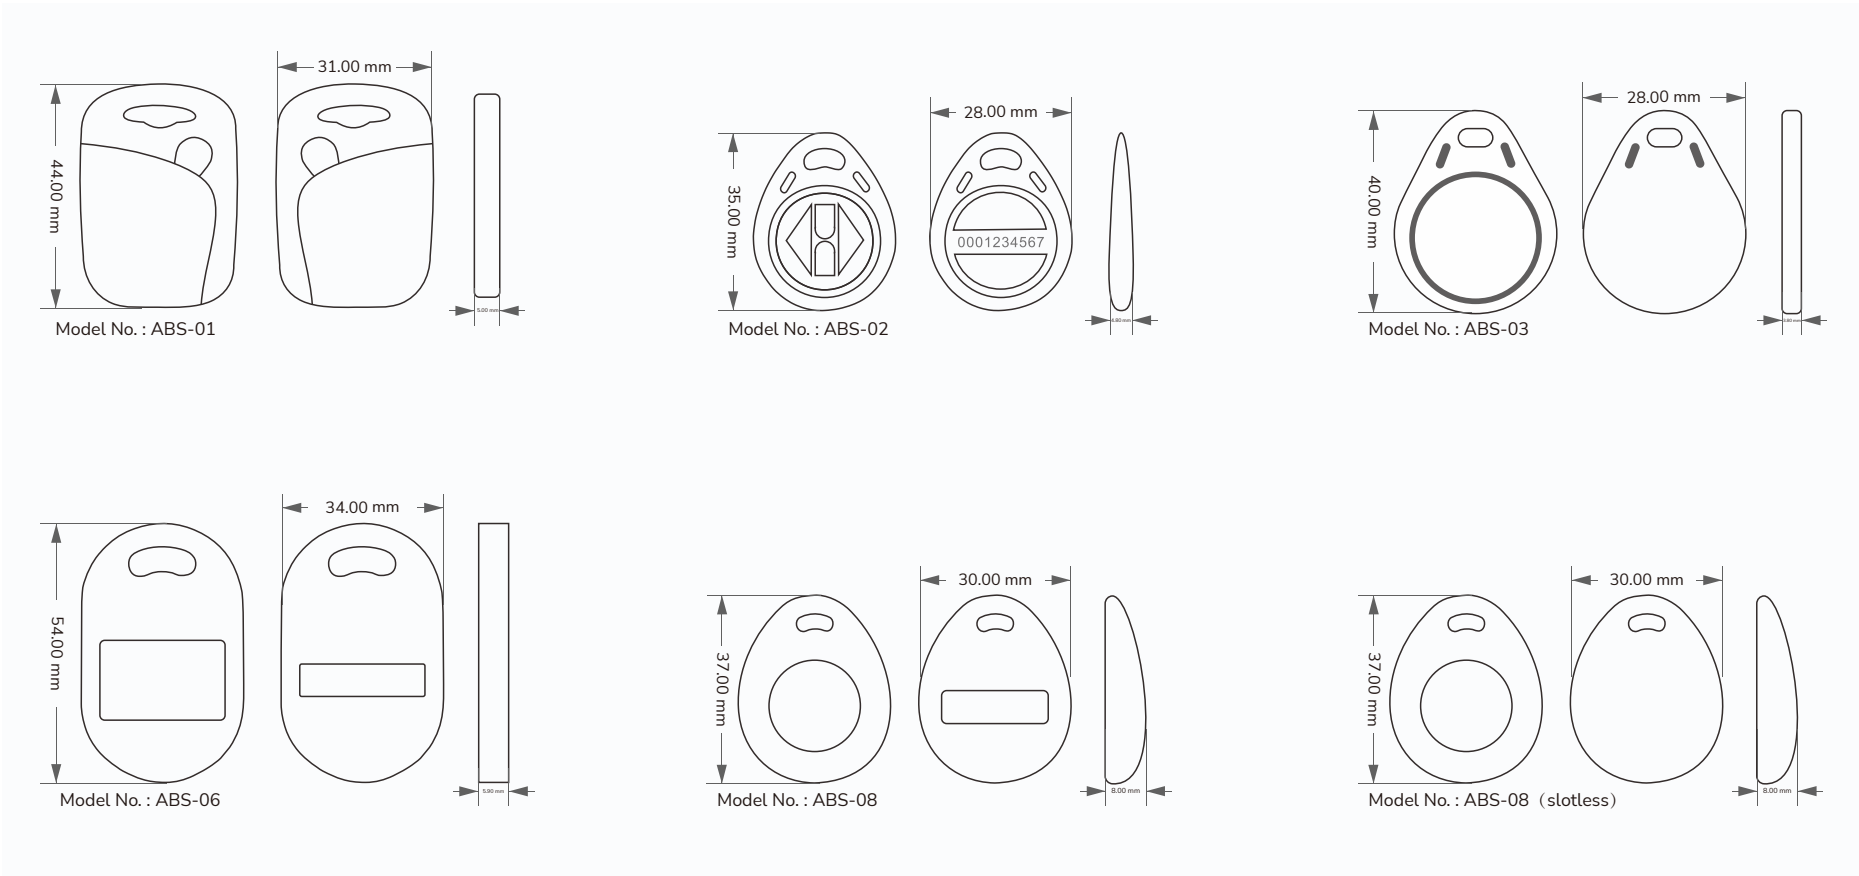

<https://www.rfidtag.com>

E-mail : sales@rfidtag.com Phone Number: +86-131-3958-0585
Singapore Office : 10 Science Park Road #03-17A, The Alpha, Singapore Science Park, Singapore 117684
Shenzhen Office : 33-408, Qianhai SZ-HK Fund Town, Nanshan, Shenzhen, China 518052
Shenzhen Factory : Q5, XingDao Industrial Park, LongGang, Bantian, Shenzhen, China 518129