


NXP UCODE® 9

RFID Textile Laundry Tag

AZ-U9-LTW-7515-D5

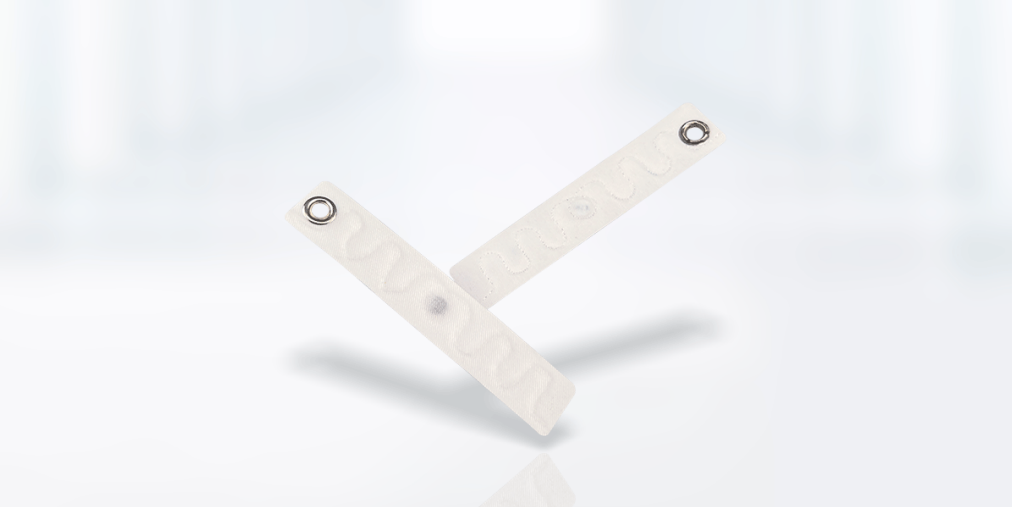

Key Features

Operating Frequency
UHF 865-868MHz(EU), 902-928MHz(US)
Chip Type
NXP UCODE® 9
International Standard
ISO/IEC 18000-6C, EPC Global Gen2V2
EPC Memory
96-bit
TID Memory
96-bit
Operating Temperature
-25°C to +110°C
Washing Cycles
200 washing cycles or 2 years

1. Product Overview

The NXP UCODE® 9 RFID Textile Laundry Tag is designed to endure and surpass 200 industrial wash cycles, guaranteeing long-lasting durability. Each tag undergoes 100% memory write testing, and both its materials and design have been rigorously tested for reliability. This tag can be hung on textiles, making it ideal for efficient textile tracking in industrial washing environments.

2. Product Parameters

2.1 Physical Characteristics

SKU	AZ-U9-LTW-7515-D5
Material	Textile + metallic ring
Dimension	75×15×1.5mm with hole (diameter 5mm)
Weight	About 0.65g
Surface Color	White
Mounting Method	Hanging on the cloth



2.2 Technical Parameters

Operating Frequency	865-868MHz (EU), 902-928MHz (US)
Communication Protocol	ISO/IEC 18000-6C, EPC Global Gen2V2
Antenna Polarization Mode	Linear Polarization
Reading Distance	Fixed Reader (2W ERP): Over 10 meters Handheld Reader (30dbi power): Over 7 meters

2.3 Washing

Maximum Temperature	194°F (90°C) / 15 minutes, 200 times
Pre-Drying in Tumbler	356°F (180°C) / 30 minutes, 200 times
Ironing	356°F (180°C) / 10 seconds, 200 times
Sterilization Process	275°F (135°C) / 20 minutes
Water Extractor Press	60 bars
Chemical Resistance	All standard chemicals used in industrial washing processes.
Washing Cycles	200 washing cycles or 2 years (whichever reaches first)

2.4 Chip Characteristics

Chip Manufacturer	NXP®
Chip Type	UCODE® 9
TID Memory	96-bit
EPC Memory	96-bit
Unique Serial Number	48-bit
Kill Password	32-bit
Read Sensitivity	-24 dBm
Write Sensitivity	-22 dBm
Encoding Speed	32 bits in 0.96 ms
Self Adjust	Support
Memory Safeguard	Support
Block Write (32-bit)	Yes
Permalock	One-time lock
Write Endurance	100,000 times
Data Retention Time	20 years

2.5 Additional Information


Operating Environment	-25°C to +110°C, 5% to 95%RH
Storage Environment	+18°C to +28°C, 40% to 60%RH (recommended)
Passed Tests	RoHS, GB18401, 100% Radio frequency compliance Testing
Application	Uniforms management Linen lease Industrial washing Textile management Access-control management, etc.



2.6 Packaging

Packing Format	Packed in carton
Packing Quantity	500 pcs/bag, 20 bags/carton G.W.: 6.18 Kg/carton
Carton Dimension	430×210×270mm

3. Size and Specification Drawing

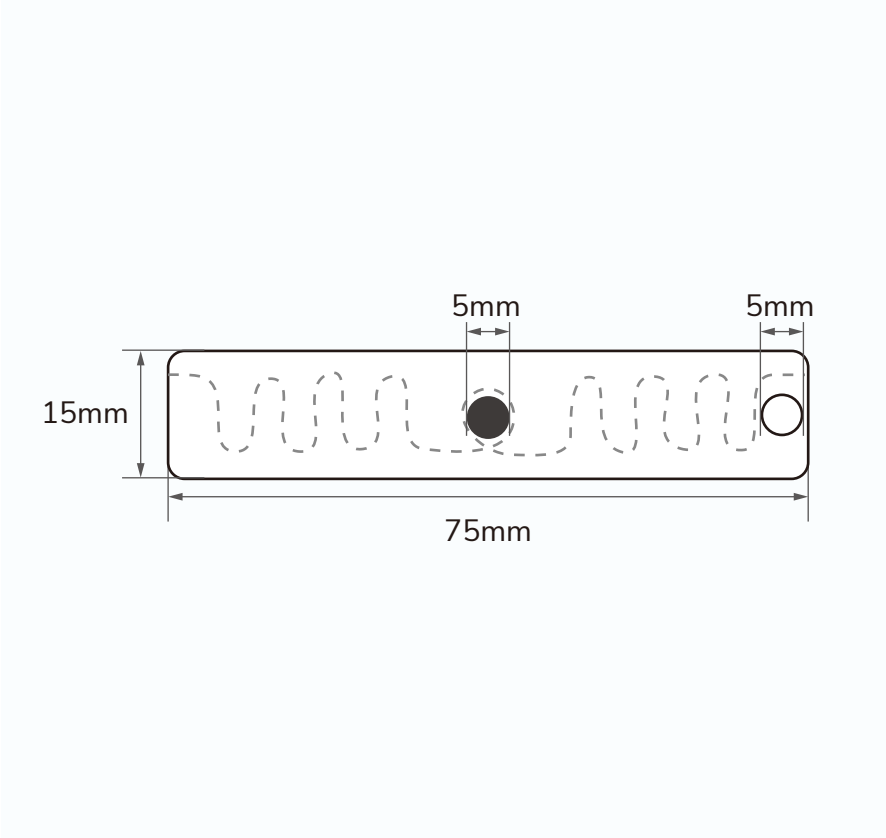

<https://www.rfidtag.com>

E-mail : sales@rfidtag.com Phone Number: +86-131-3958-0585
Singapore Office : 10 Science Park Road #03-17A, The Alpha, Singapore Science Park, Singapore 117684
Shenzhen Office : 33-408, Qianhai SZ-HK Fund Town, Nanshan, Shenzhen, China 518052
Shenzhen Factory : Q5, XingDao Industrial Park, LongGang, Bantian, Shenzhen, China 518129