

Sheth L.U.J & Sir M.V College
Subject: Cyber Security

Configure IPsec on network devices to provide secure communication and protect against unauthorized access and attacks.



The image displays two screenshots of the Cisco Packet Tracer 9.0.0 interface, illustrating the configuration of IPsec on a network device.

Top Screenshot: Shows the Logical view of a network topology. Two routers, Router0 and Router1, are connected via their GigabitEthernet0/0 interfaces. Each router is also connected to a 2960-LTT Switch, which is in turn connected to a PC. The Event List on the right shows various network events, including ACL, ARP, BGP, DHCP, DNS, EIGRP, ICMP, and IPsec. The Play Controls at the bottom indicate the simulation is running.

Bottom Screenshot: Shows the same network topology, but with the configuration window for Router0 open. The configuration includes the following commands:

```
Router(config-if)#ip address 10.0.0.1 255.255.255.252
Router(config-if)#no shutdown
Router(config-if)#
!LINK-3-UPDOWN: Interface GigabitEthernet0/1, changed state to down
exit
Router(config)#
!LINK-3-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
ip route 192.168.2.0 255.255.255.0 10.0.0.2
Router(config)#enable
% Incomplete command.
Router(config)#configure terminal
% Invalid input detected at '' marker.
Router(config)#configure terminal
% Invalid input detected at '' marker.
Router(config)#
Router#
!SYS-5-CONFIG_I: Configured from console by console
Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#no ip address
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/2
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
!LINK-3-CHANGED: Interface GigabitEthernet0/2, changed state to up
!LINK-3-UPDOWN: Line protocol on Interface GigabitEthernet0/2, changed state to up
exit
Router(config)#enable
% Incomplete command.
Router(config)#enable
% Incomplete command.
Router(config)#
Router#
!SYS-5-CONFIG_I: Configured from console by console
Router#enable
Router#show ip interface brief
Interface IP-Address OR Method Status Protocol
GigabitEthernet0/0 unassigned YES manual up
GigabitEthernet0/1 10.0.0.1 YES manual down
GigabitEthernet0/2 192.168.1.1 YES manual up
Vlan1 unassigned YES unset administratively down down
Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/1
Router(config-if)#no ip address
Router(config-if)#exit
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 10.0.0.1 255.255.255.252
Router(config-if)#no shutdown
```

Sheth L.U.J & Sir M.V College
Subject: Cyber Security

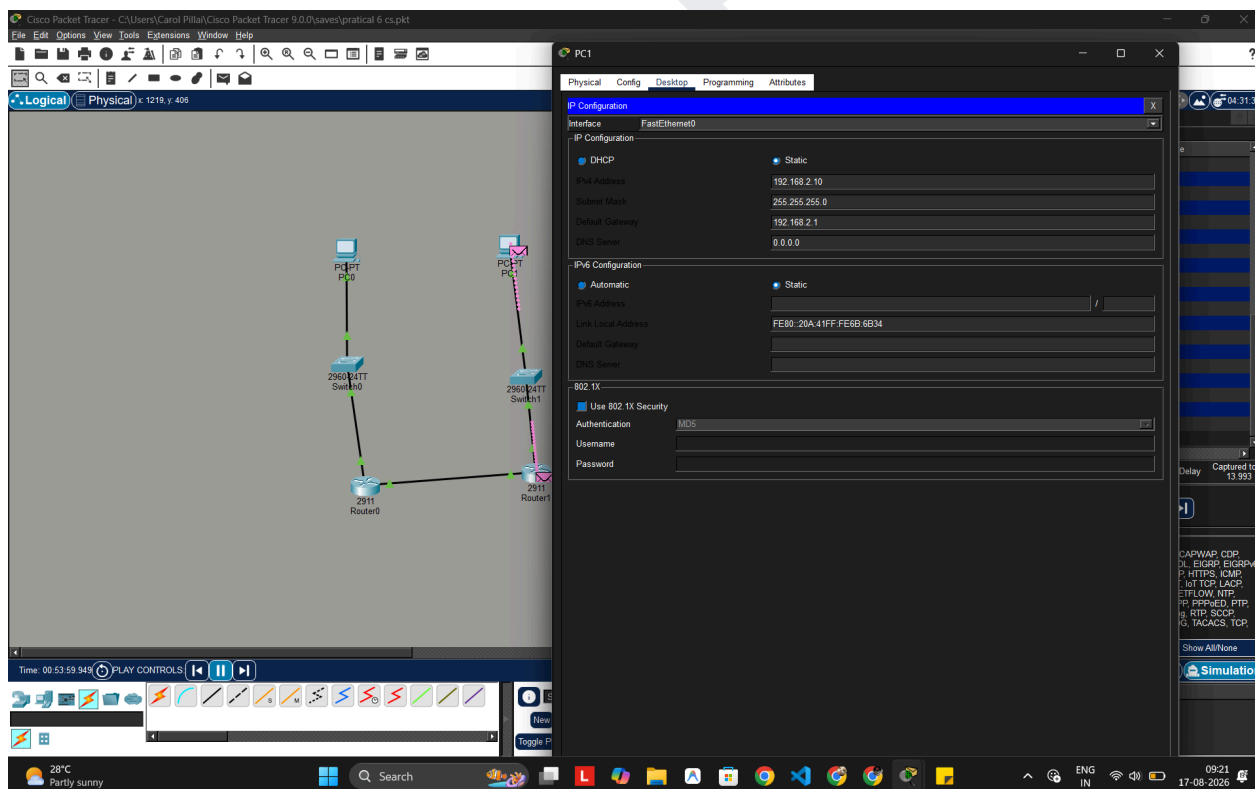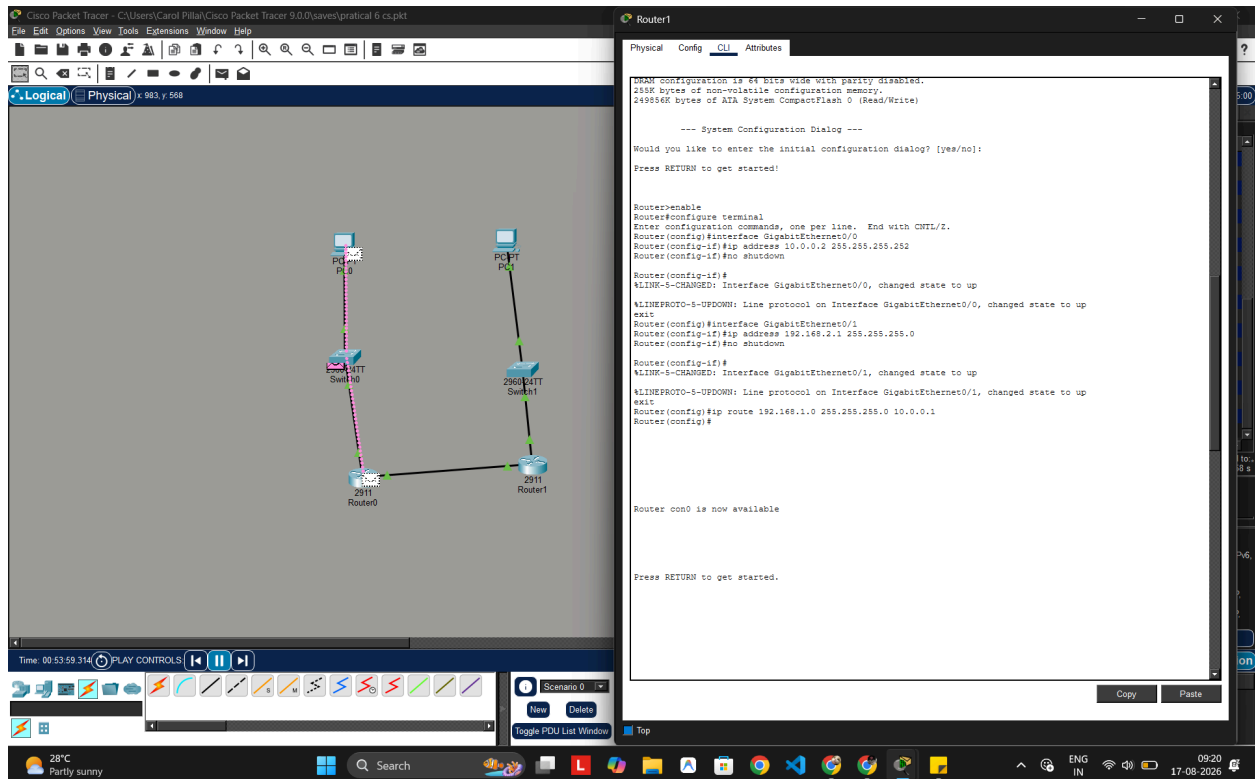

Sheth L.U.J & Sir M.V College
Subject: Cyber Security

