


System Architecture: Dual-Purpose Health Monitor

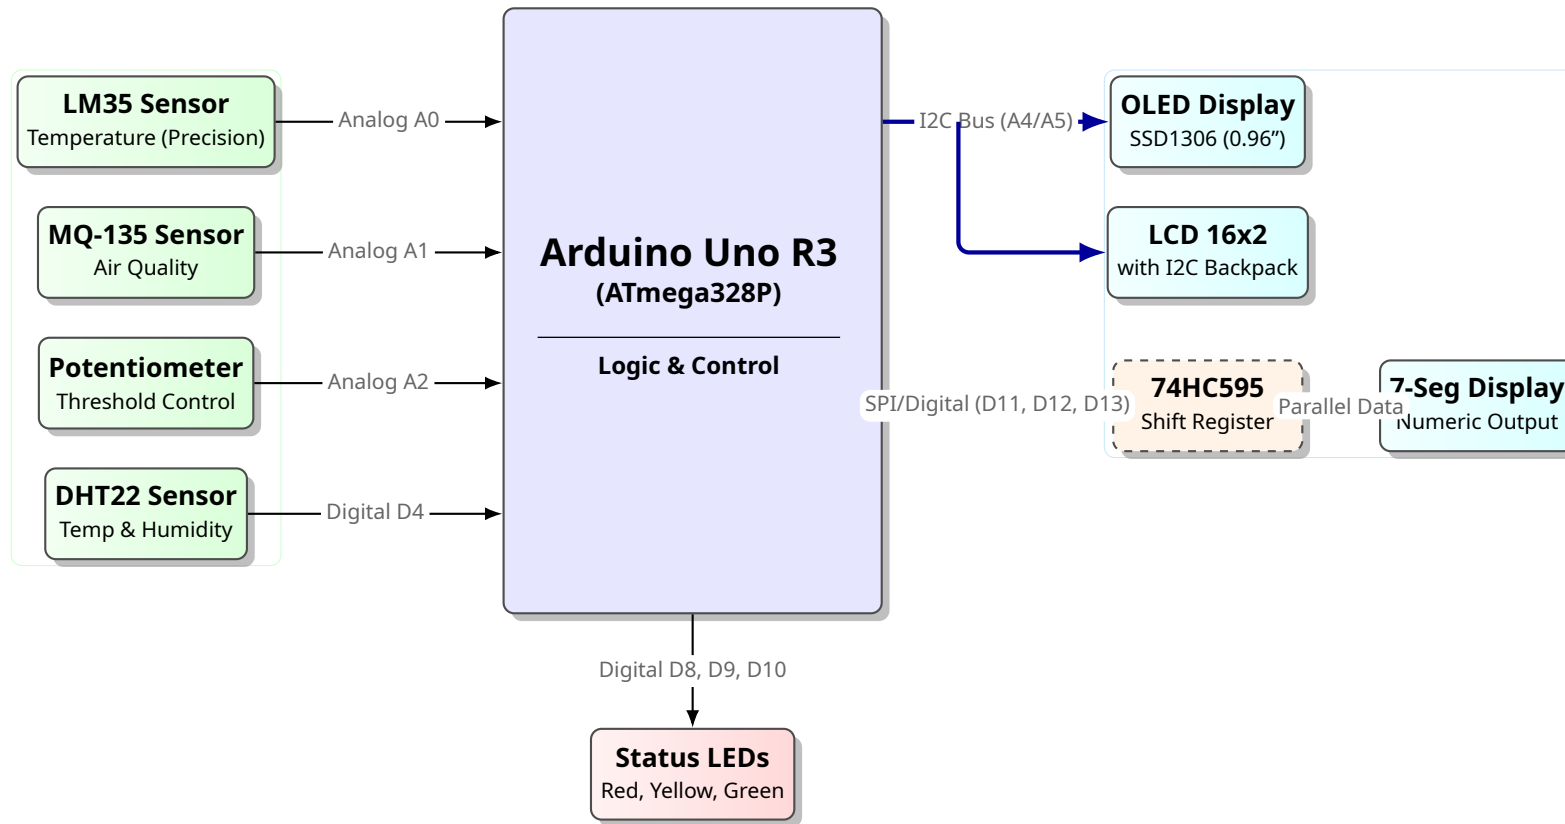

Connection Key:

I2C Bus: Used for OLED and LCD displays (Pins A4, A5).

SPI/Shift: Used to drive the 7-segment display to save pins (Pins D11, D12, D13).

Analog Input: Reads continuous data from LM35, MQ-135, and Potentiometer.