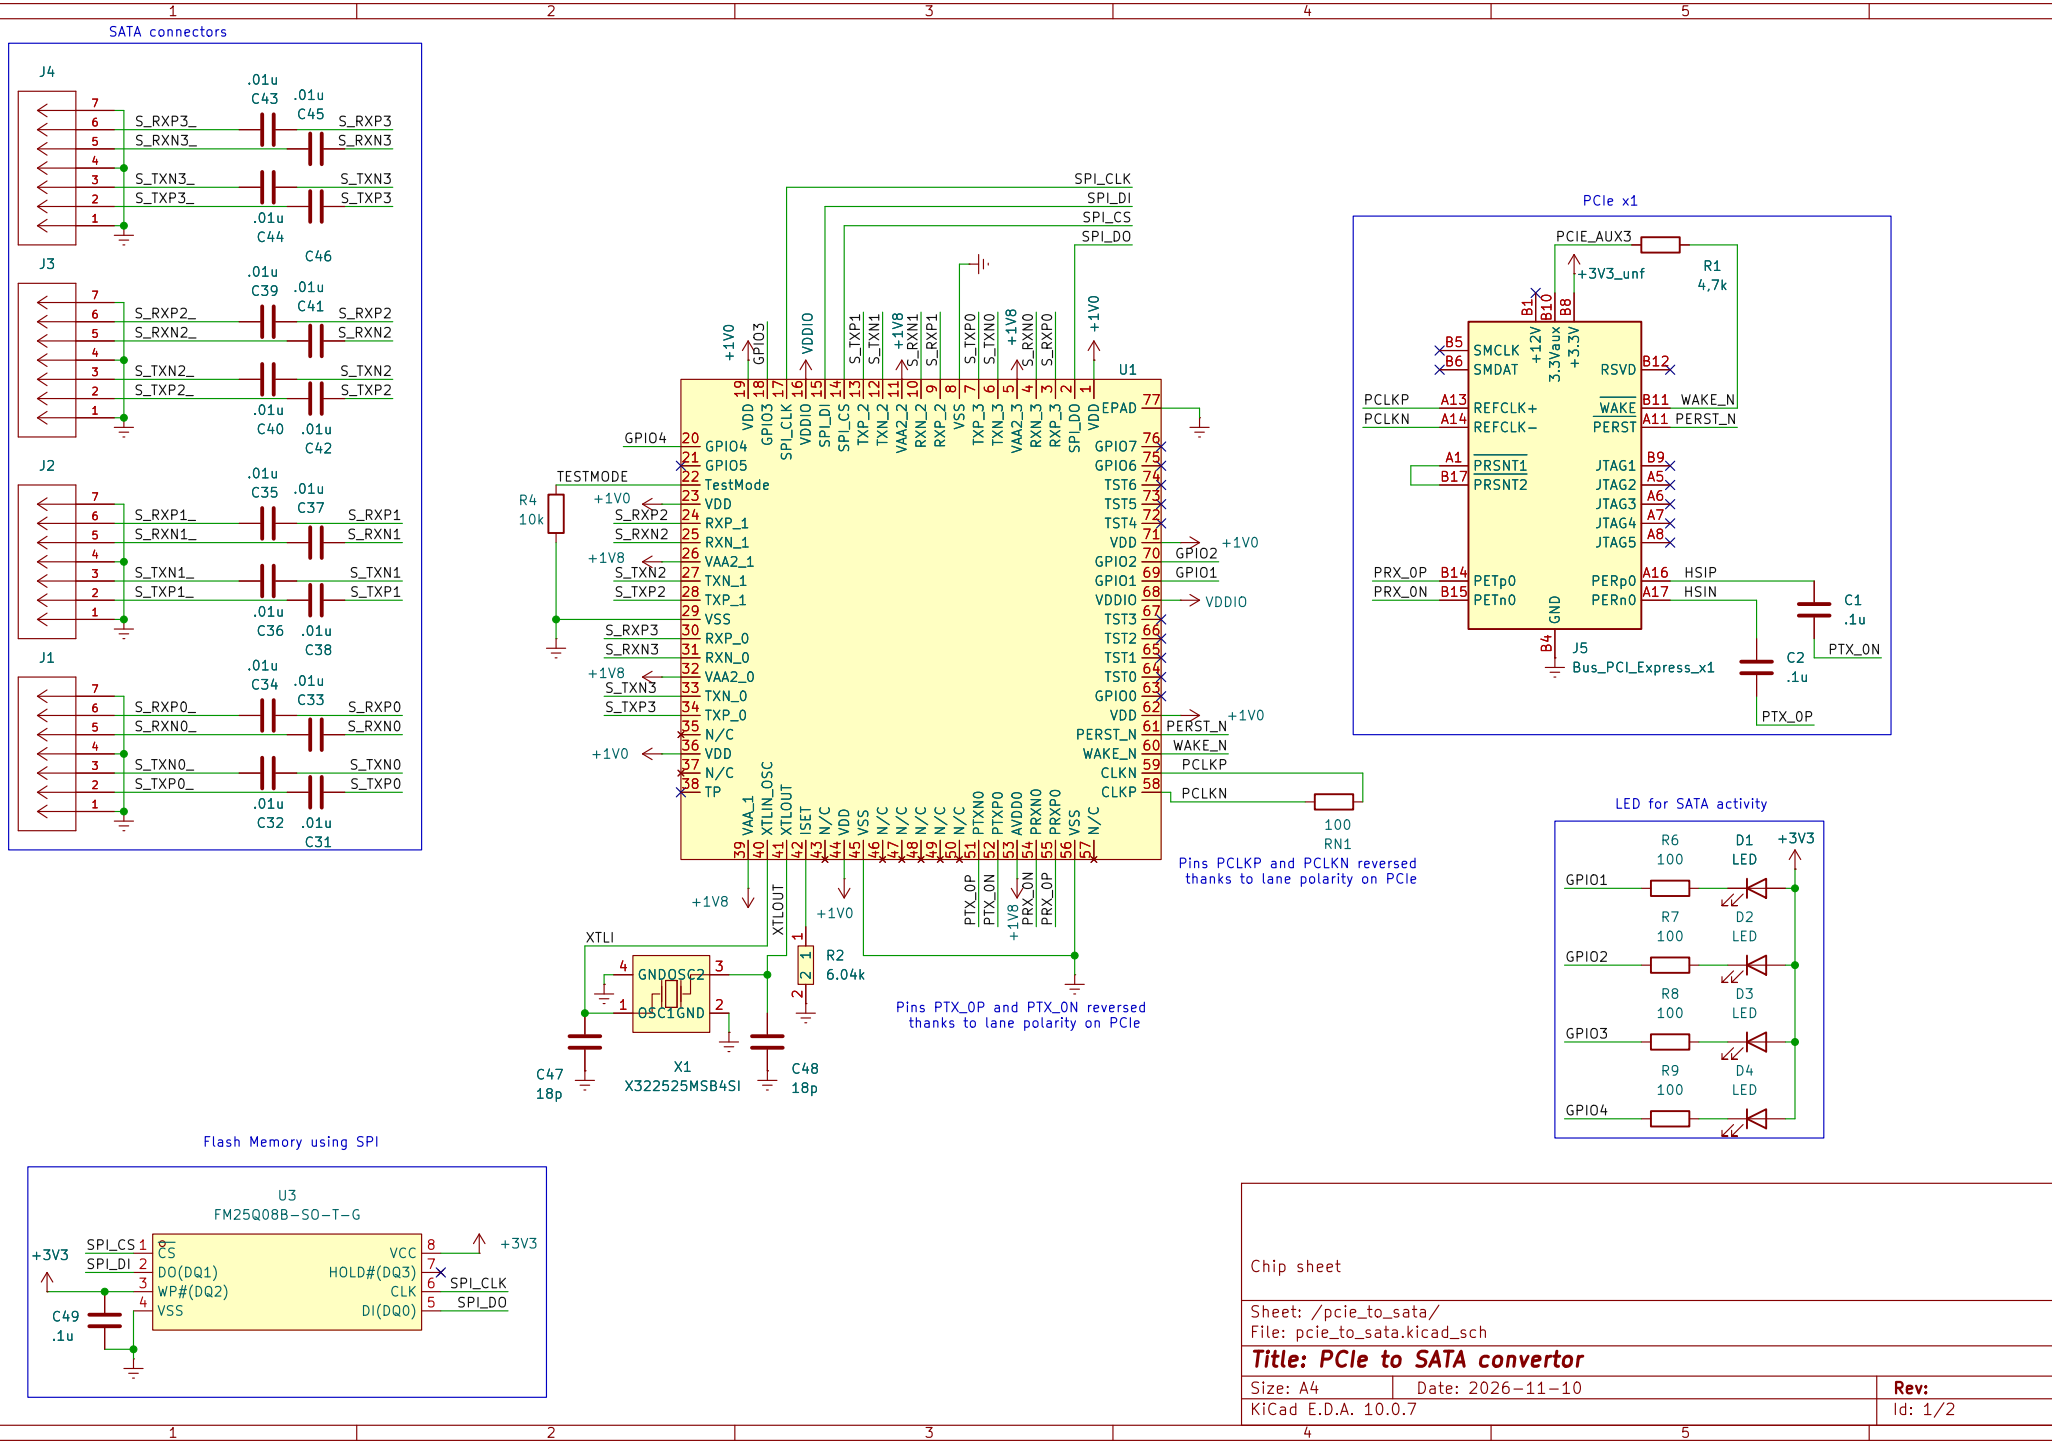
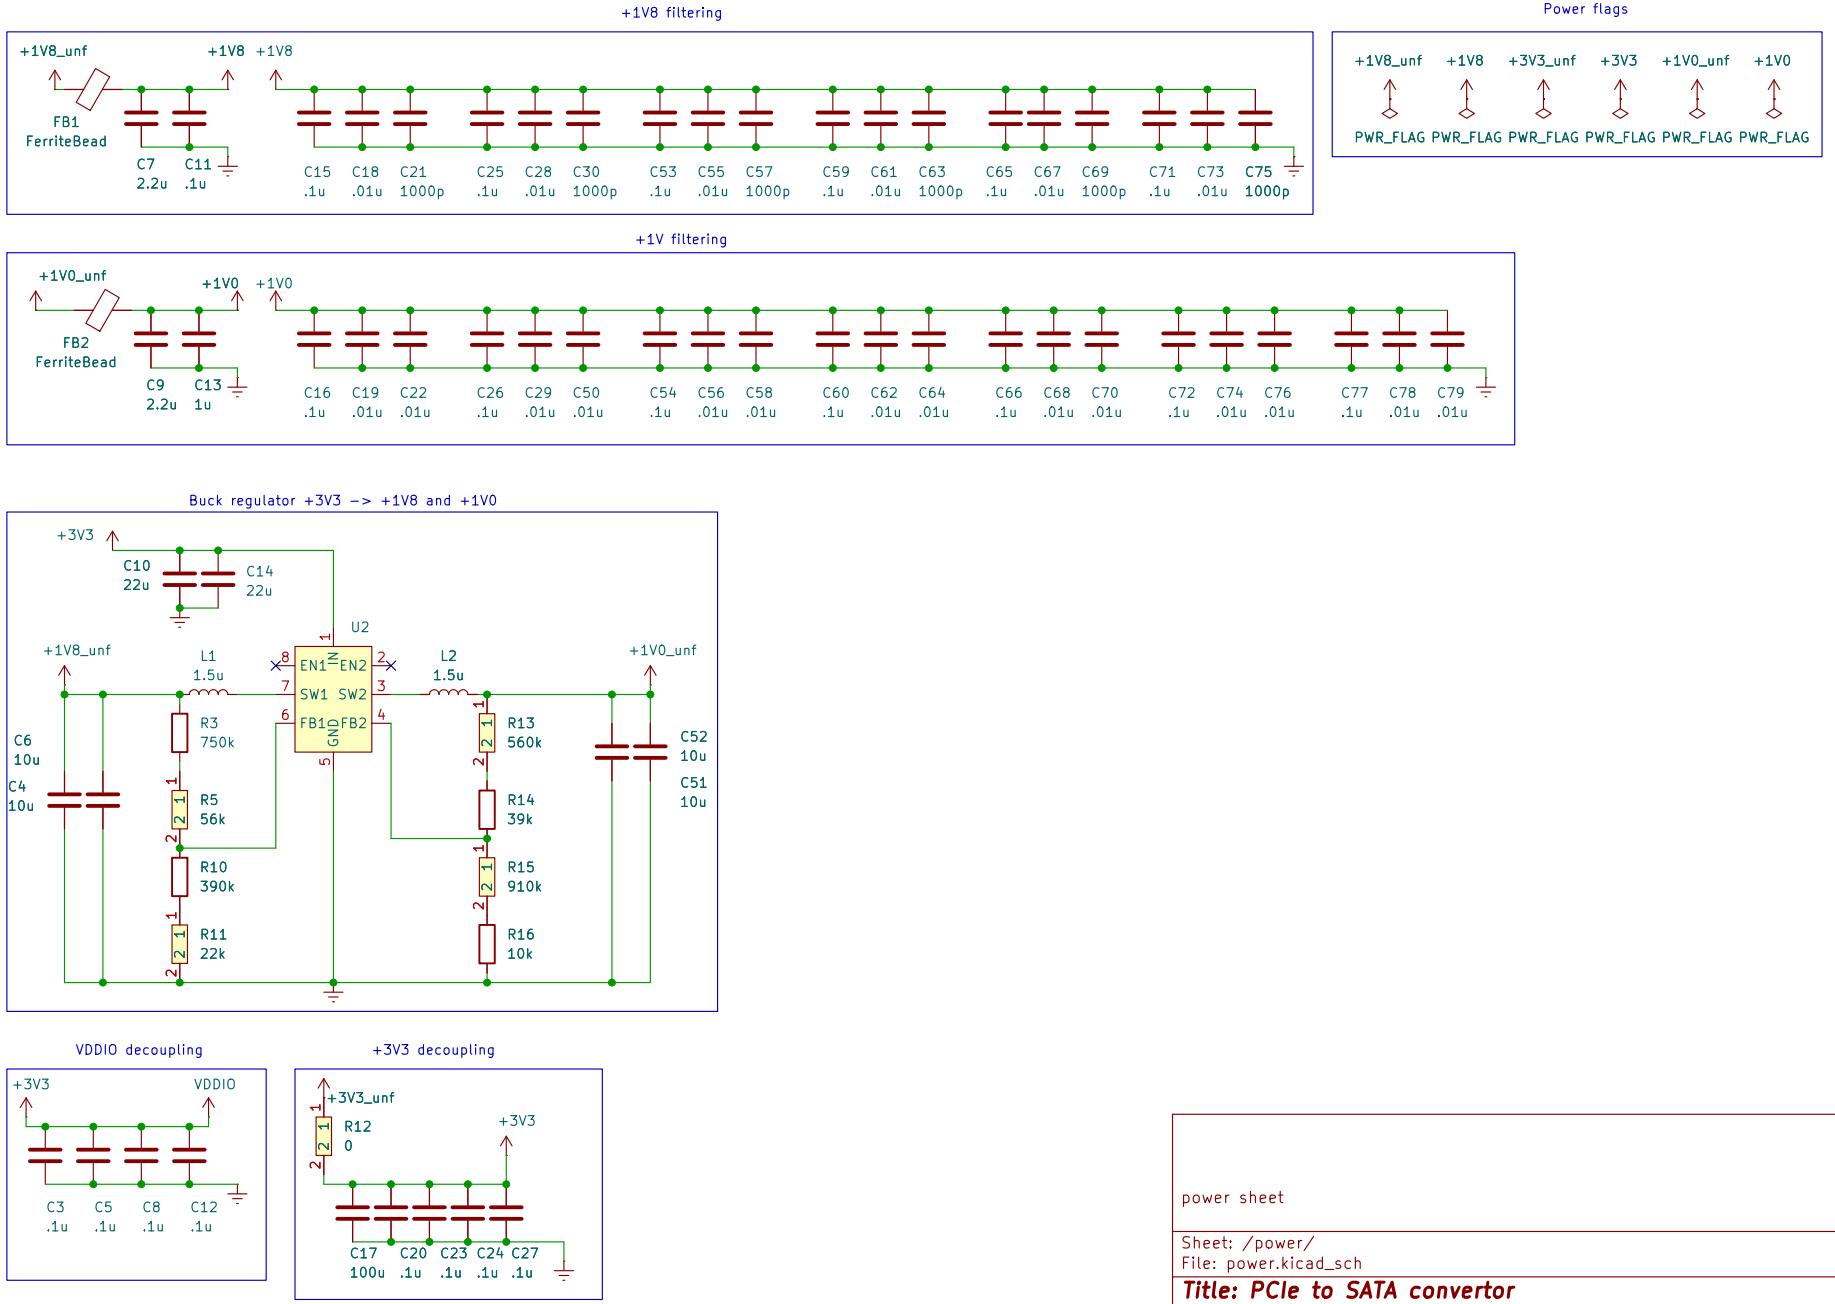

SATA connectors
J4
J3
J2
J1
S_RXP3_
S_RXN3_
S_TXN3_
S_TXP3_
S_RXP2_
S_RXN2_
S_TXN2_
S_TXP2_
S_RXP1_
S_RXN1_
S_TXN1_
S_TXP1_
S_RXP0_
S_RXN0_
S_TXN0_
S_TXP0_
.01u
C43
C45
C44
C46
C39
C41
C40
C42
C35
C37
C36
C38
C34
C33
C32
C31
SPI_CLK
SPI_DI
SPI_CS
SPI_DO
U1
TESTMODE
R4
10k
R2
6.04k
XTLI
X1
X322525MSB4SI
C47
18p
C48
18p
Pins PCLKP and PCLKN reversed
thanks to lane polarity on PCIe
Pins PTX_0P and PTX_0N reversed
thanks to lane polarity on PCIe
100
RN1
PCIe x1
PCIE_AUX3
+3V3_unf
R1
4,7k
J5
Bus_PCI_Express_x1
C1
.1u
C2
.1u
PTX_0N
PTX_0P
LED for SATA activity
R6
R7
R8
R9
100
D1
D2
D3
D4
LED
GPIO1
GPIO2
GPIO3
GPIO4
Flash Memory using SPI
U3
FM25Q08B-SO-T-G
C49
.1u
Chip sheet
Sheet: /pcie_to_sata/
File: pcie_to_sata.kicad_sch
Title: PCIe to SATA convertor
Size: A4
Date: 2026-11-10
Rev:
KiCad E.D.A. 10.0.7
Id: 1/2



power sheet

Sheet: /power/
File: power.kicad_sch

Title: PCIe to SATA convertor

Size: A4	Date: 2026-11-11	**Rev:**
KiCad E.D.A. 10.0.7		Id: 2/2