


Parameter	Value	Unit
Estimated minimum evacuation distance	50	km
Estimated maximum evacuation distance	150	km
Estimated most common evacuation distance	100	km
Average energy consumption by EVs	0.188	kWh/km
Standard deviation for energy consumption by EVs	0.025	kWh/km
Average battery capacity of an EV	74.4	kWh
Standard deviation of the battery capacity of an EV	20.8	kWh
Minimum initial state of charge of an EV battery	0	-
Maximum initial state of charge of an EV battery	1	-
Most common initial state of charge of an EV battery	0.5	-
Corresponding most common initial battery range of an EV	198.65	km
Number of vehicles to evacuate	1,000	-
Average power of level-2 chargers	6	kW
Average power of level-3 chargers	80	kW
Standard deviation of level-2 chargers' power	3	kW
Standard deviation of level-3 chargers' power	20	kW
Minimum evacuation time	4	hr
Maximum evacuation time	8	hr
Minimum areal energy density of the backup storage system	160	kWh/m ²
Maximum areal energy density of the backup storage system	570	kWh/m ²

Number of Vehicles for Individual Charging Energy Calculation	1
---	---

Input Probabilistic Distributions

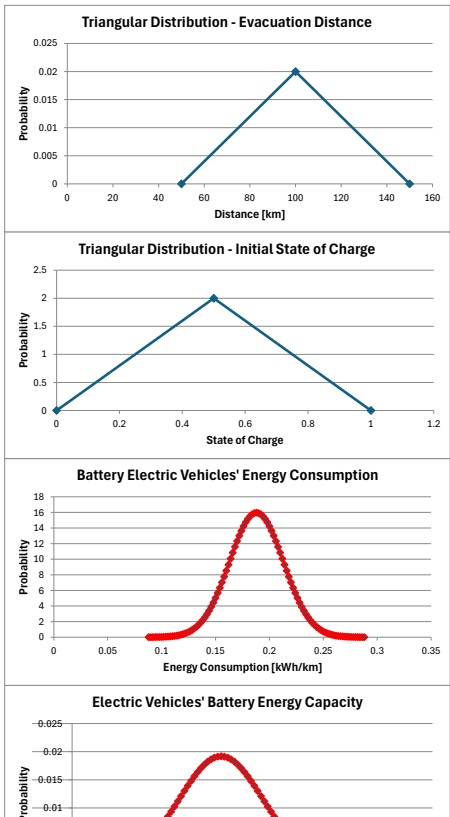

Simulation Results

Mean of Fitted Gaussian Distribution [MWh]
1.29
Standard Deviation of Fitted Gaussian Distribution [MWh]
0.11

